



Your business our concern



SKY AIR PRODUCT RANGE
COMMERCIAL CATALOGUE

SkyAir

About Daikin

Daikin has a worldwide reputation based on nearly 90 years' experience in the successful manufacture of high quality air conditioning equipment for industrial, commercial and residential use and 55 years as a leader in heat pump technology.


Daikin quality

Daikin's much envied quality quite simply stems from the close attention paid to design, production and testing as well as aftersales support. To this end, every component is carefully selected and rigorously tested to verify its contribution to product quality and reliability.

Heat pump technology

Air to air heat pumps obtain 75% of their output energy from renewable sources: the ambient air, which is both renewable and inexhaustible*. Of course, heat pumps also require electricity to run the system, but increasingly this electricity can also be generated from renewable energy sources (solar energy, wind energy, hydropower, biomass).

* EU objective COM (2008)/30

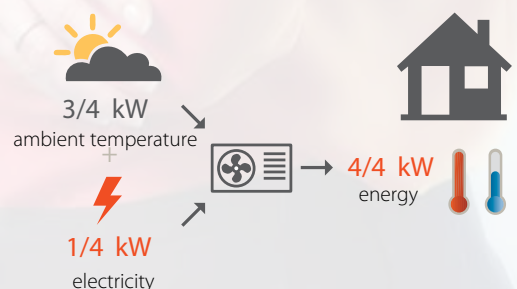



Content

| | |
|---|----|
| Sky Air, the solution for the light commercial sector | 04 |
| Products in the spotlight | 09 |
| Sky Air product range | 17 |
| Ventilation | 57 |
| Control systems | 69 |
| Options & accessories | 86 |
| Europe's New Energy Label | 90 |

SkyAir the solution for the light commercial sector

Sky Air is Daikin's industry-leading light commercial range, which has been designed for optimum seasonal energy efficiency. Providing the ideal solution for all kinds of small commercial spaces, the Sky Air series offers a complete comfort solution that puts you in total control of your heating and cooling, ventilation and air curtains.





Heating and cooling

Using highly **efficient heat pumps**, Sky Air solutions offer year round comfort:



- All systems now optimised for seasonal energy efficiency.
- An outdoor unit can power several indoor units.
 - For a long or irregularly shaped room you can use up to four indoor units linked to a single outdoor unit. All the indoor units are controlled at the same time.
 - Air conditioning is available in every room: a multi system allows up to nine different indoor units to operate from a single outdoor unit. All the indoor units can be individually controlled and do not need to be installed at the same time. Extra units can be added later.
- Select from a wide range of indoor units: wall and floor mounted, concealed or ceiling mounted.
- Very quiet and draught-free operation.
- Ideal for both new build and refurbishment projects.



Biddle air curtains for entrances

Biddle air curtains can be used with the Sky Air system to provide heating at building entrances:

- Ideal for buildings with open-door policy such as retail stores.
- Year round climate control and comfort even on the most demanding days.



User-friendly controls

Our **user friendly controls** allows you to manage your Sky Air system for maximum efficiency:


- From individualised unit control to centralised management via touch-screen options and code based controllers, we put you in command at all times.
- The wired remote controller gives full access to the unit's functions and energy saving features, including flexible scheduling for different seasons and the possibility to indicate kWh usage (round flow cassette).
- The DIII-net connection is standard, allowing you to link into the wider building management system.
- Text based remote control and monitoring of the entire building is available via the internet.



Ventilation

Daikin's **ventilation** option provides a supply of fresh air to help create a healthy and high-quality indoor environment:

- Heat is reclaimed between outdoor and indoor air.
- The fresh air from the ventilation provides additional cooling virtually free.
- Optimum humidity control.

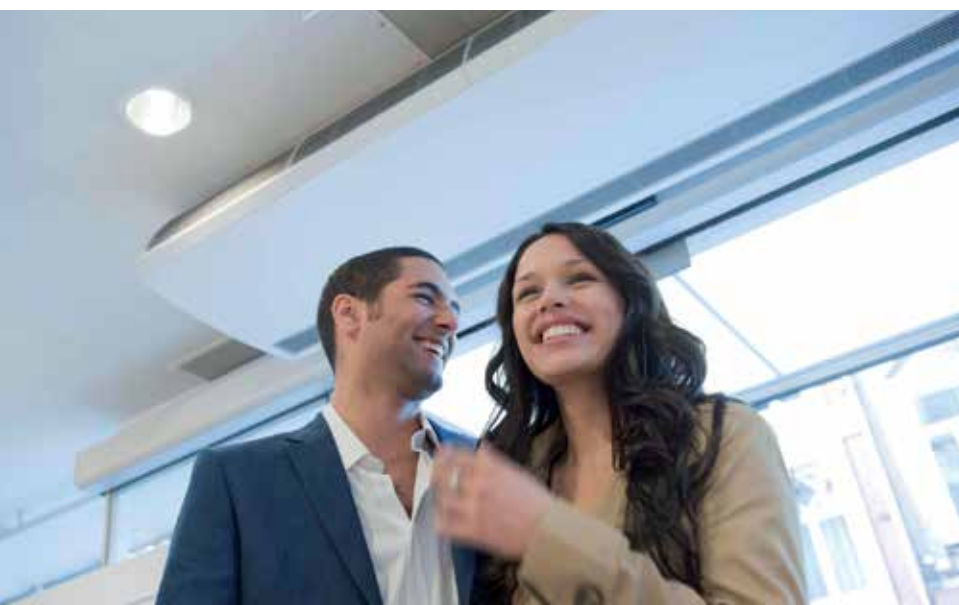

SkyAir the solution for the light commercial sector



Sky Air for retailers

- Creates an inviting atmosphere for your customers
- Discreet with limited visual and operating impact
- Reduces energy usage and costs
- Worry-free installation

Our **round flow cassettes** blend with your décor as they are **integrated in the ceiling** with only the standard panel visible. This standard panel is the secret to **increasing comfort levels** and providing the **perfect climate conditions** for your customers as the various flaps can be individually opened and closed to ensure that the heating and cooling are directed to where they are needed.

The panel is also the secret to reducing maintenance as it can conceal the **auto cleaning function** that traps dust with a special filter that cleans itself once a day, while the collected dust can be easily removed with a vacuum cleaner. Up to 50% energy can be saved!

Managing this system couldn't be easier as our intelligent touch manager enables you to **monitor and control** the system directly or via the Internet. It can also be set to provide easy management of your electricity consumption and can even control the lighting, while enhanced scheduling will make your life easier.



Sky Air for offices and banks

- Design and genius in one.
- Unique design in the market: integrates fully flat into the ceiling.
- Optional presence and floor sensors improve comfort and efficiency.

The **fully flat cassette** is unique in the market thanks to its remarkable blend of iconic **design and engineering excellence**.

Blending seamlessly with the décor of a modern office and meeting the demanding criteria of architects, the fully flat cassette totally integrates within a standard European ceiling panel, enabling lights, speakers and sprinklers to be installed in the adjoining ceiling tiles.

These units are ideal for heating or cooling smaller areas such as meeting rooms, together with our round flow cassettes. Both can be combined with presence and floor sensors and even with our ventilation option, to optimise the energy efficiency and provide perfect comfort.

The **presence sensor** adjusts the set point or switches the unit off when there is nobody in the room but when someone is there, the air-flow is directed away from that person to avoid draught. This combined process has been found to reduce energy usage.

The **floor sensor** detects the average temperature near the floor and ensures an even temperature distribution between ceiling and floor. Cold feet become history!

Daikin's **ventilation** option provides a supply of fresh air to help create a healthy and high-quality indoor environment.

Using the KNX interface to connect your Sky Air system to the **building management** system allows central monitoring and control of several devices, including lights, shutters, and climate control systems as to maximize energy efficiency.



Sky Air for server rooms

- Continuous cooling operation.
 - Automatic rotation between active units.
 - Backup outdoor unit ensures continuous operation.
 - Possible to block certain settings.
- Quality products.

Servers, especially racks of servers, generate a great deal of heat and this needs to be removed through **continuous cooling and humidity control**. This presents special challenges that the Sky Air system easily meets with its special server room configuration. Each server room is fitted with two indoor units each connected to a single outdoor unit to ensure that if one outdoor unit fails, the other is there as an **automatic back up**. The indoor units are configured for constant cooling and duty rotation. This is achieved through **automatic switching between units** after certain period of use to ensure that at any time one unit is working while the other is available for maintenance.

Given the critical importance of continuous cooling for server rooms, the system is managed via an RTD-NET controller that can monitor and control up to 16 indoor units either directly or via the building management system and has a '**control of duty**' unit that locks the server room settings so that they cannot be changed by people in the server room.



Sky Air for restaurants

- Ensures an even temperature distribution to create the perfect dining environment.
- Highly energy efficient.
- Uses intelligent control systems operated from one central location.

Nothing should distract diners from enjoying the **perfect ambience** and that ambience includes the **optimal temperature**. That's exactly what Daikin's concealed ceiling units deliver through whisper-quiet operation and improved comfort from the 3-step air flow control and these turn your restaurant into a comfortable, welcoming environment for your customers. And with the **centralised control** and easy scheduling for the entire restaurant system, **energy use** is minimised to control your running costs.



Advantages for building owners

- Your climate control system will meet legal requirements well beyond the current legislation.
- You will obtain optimal seasonal performance thus save on running costs, obtain rapid return on investment and contribute to ecological protection objectives.
- The climate control system will add value to the building thus protecting your investment.
- Advanced controls and monitoring features allow the delivery of optimal comfort levels with the minimum of cost.

Benefits for installers

- Provide an easy transition from existing units to the technologically advanced units that offer far higher energy efficiency solutions.
- Modular designs and factory fitted extras make installation easier to achieve.
- Provide much more than just an installation service: special settings available for installers to improve system comfort and reliability.
- Sky Air range: a solution that meets all your customer's needs, from high specifications, tailor-made solutions to basic cooling and heating.

Benefits for consultant and design offices

- You will have the confidence of knowing that you can recommend the right climate control systems to meet tomorrow's legislation.
- You will have systems that are designed to blend into any décor and provide optimal performance with top seasonal efficiencies.
- Our systems allow flexibility for you by having access to innovative technology and a wide range of products.
- Your credentials as an eco-conscious consultant and designer will be enhanced.
- Our tools allow you to maximize building performance.













Products in the spotlight:

| | |
|---------------------|----|
| Seasonal Smart | 10 |
| Seasonal Classic | 10 |
| Fully flat cassette | 12 |
| Round flow cassette | 14 |

Seasonal Smart and Seasonal Classic

Daikin offers a **complete light commercial** range, optimised to achieve top efficiency!

| | | FCQG / FCQHG | FFQ | FHQ | FBQ | FDQ | FAQ | FVQ | FUQ |
|----------------------------------|---|---|---|---|---|--|---|---|---|
| | |  |  |  |  |  |  |  |  |
| RZQG Seasonal Smart |  | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| RZQSG Seasonal Classic |  | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |

Seasonal Smart

- Enhancement in efficiency and comfort thanks to selectable and variable refrigerant temperatures.
- Suits computer room applications (EDP).
- R-22/R-407C Replacement technology has been incorporated: replacement solutions deliver major energy savings, offering rapid payback and a cost-effective upgrade solution, phased for minimal downtime.
- Guarantees operation in heating mode down to -20°C.
- A 75m pipe run to achieve longer runs for installation.
- Compatibility with D-BACS – links your unit into the wider building management system.

Seasonal Classic

- R-22/R-407C Replacement technology has been incorporated: replacement solutions deliver major energy savings, offering rapid payback and a cost-effective upgrade solution, phased for minimal downtime.
- Guarantees operation in heating mode down to -15°C.
- A 50m pipe run to achieve longer runs for installation.

Air conditioning with smart use – User friendly remote controller BRC1E52A/B

A series of energy saving functions that can be individually selected

- Temperature range limit.
- Setback function.
- Presence & floor sensor settings (available on fully flat cassette & round flow cassette).
- Setting temperature auto reset.
- Off timer.
- kWh indication (round flow cassette).
- 3 weekly timers.



Night quiet mode function

Night quiet function: max. -5 dB(A)

During night time, sound level of the outdoor unit can be reduced for a certain period by limiting the maximum compressor frequency and fan speed: starting time and ending time can be set. The night quiet function can be enabled according to end-user preferences via 2 different modes:

Mode 1: automatic mode

- Set via the remote control.
- Time of maximum temperature is memorized.
- The low operating mode will become active 8 hours* after the peak temperature in daytime and operation will return to normal after 10 hours of low noise operation*.

Mode 2: customized mode


- Starting and ending times can be set by using an external timer control (optional adapter KRP58M51).
- Field supplied timer switch required for RZQ(S)G71-140).

* Notes: For factory settings: please refer to the service manual of these units or contact your local dealer.

Variable Refrigerant Temperature

Did you know that all Daikin Sky Air systems operate with variable refrigerant temperature?

In cooling mode for example the system will automatically increase its evaporating temperature (T_e) and consequently discharge temperature if the gap between the achieved indoor temperature (T_{in}) and the request indoor temperature (T_{set}) becomes smaller. This reduces the risk of cold draft and hence increases the customer comfort.

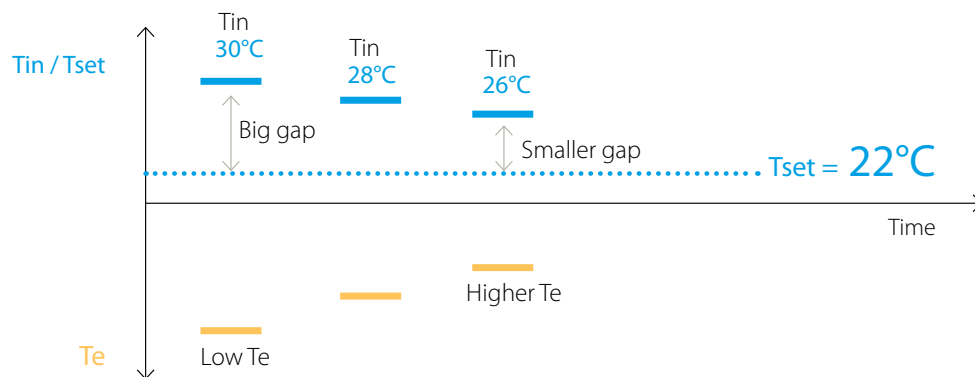



Seasonal Smart

UNIQUE!

Seasonal Smart even adopts a special setting to further improve comfort & efficiency by offering the possibility to customize the boundaries of the evaporating (T_e) or condensing (T_c) temperature limits. The perfect solution for those people looking for an even more comfortable indoor air climate & an even further reduction of their energy bill.



- ✓ Improved comfort
- ✓ Reduced energy bill

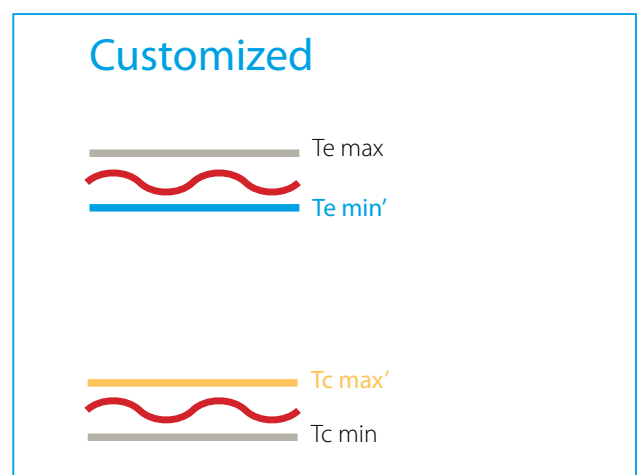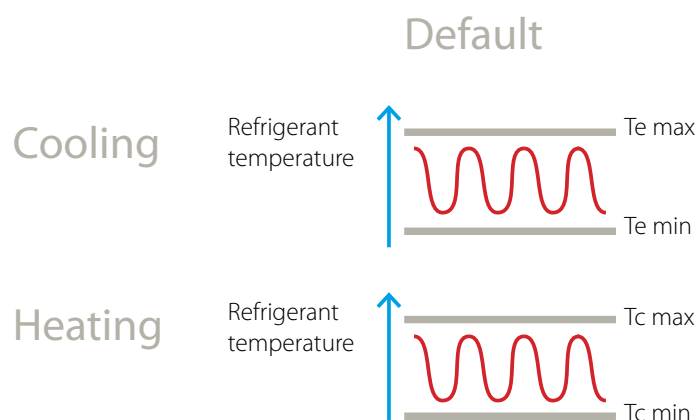

UNIQUE!

Fully Flat Cassette: Design & Genius in one

Unique in the market, the fully flat cassette is a remarkable blend of iconic design and engineering excellence with an elegant white or a silver and white finish. Fitting flush within the ceiling modules and fully flat with the ceiling itself, the cassette is both stylish and unobtrusive. Superb efficiency and comfort is delivered through the combined use of floor and presence sensors and, when necessary, the individual flap control via the wired remote controller makes it simple to fix the position of each flap individually, to suit any new room configuration.



Fully
integrated,
fully
discreet

The concept our designers had in mind was for an unobtrusive cassette that blends seamlessly with the décor of a modern office while meeting the demanding criteria of architects for total integration within a standard European ceiling panel, enabling lights, speakers and sprinklers to be installed in the adjoining ceiling tiles. The result is the fully flat cassette with its near flush fit, 4-way air distribution and special sensors to ensure the delivery of perfect comfort. Available in white or white and grey, the fully flat cassette is the perfect blend of design and function.

Differentiated by excellence

Sensor-driven comfort

To ensure perfect comfort the fully flat cassette is fitted with two optional sensors linked to an advanced controller.

The **'presence' sensor** detects when there are people in the room and it adjusts the temperature to the previously selected 'set point' thus establishing the perfect working conditions. When the sensor establishes that the room is empty, it can switch off the cassette so that the user is not wasting money on unnecessary heating or cooling. The sensor also adapts the direction of the airflow depending of where people are situated in the room, ensuring every individual's comfort at any time.

Because hot air rises, the natural temperature distribution in a room is for it to be warmer near the ceiling and cooler near the floor. The cassette's **'floor' sensor** detects the temperature difference and re-directs the airflow to ensure that the temperature distribution is even: cold feet are history!





Flexible solution

The need for flexible usage of space often means that temporary or permanent barriers are erected leaving the cassette close to a wall or in a corner with the resulting imbalances in airflow. Our advanced technology anticipates this and we have made it possible to use the controller to individually control or block (use option sealing kit for 3- or 2-directional air discharge) flaps to restore optimal efficiency and to save on energy costs.

Silent comfort

The fully flat cassette is amongst the quietest units in the market.

Air quality

The quality of the air in the room is as important as the temperature and we have fitted advanced filters to remove dust particles to ensure the air is clean. In addition, a special programme allows the humidity levels to be reduced without variations in temperature. Fresh air intake for healthy living via optional kit (KDDQ44XA60).

Intuitive control

The fully flat cassette's advanced controller provides the user with absolute control over their work environment. From setting the desired temperature to directing the airflow, from delivering the right temperature whenever the room is in use to ensuring that cold feet are history, from reconfiguring airflow to monitoring performance, the advanced controller is simple and intuitive to use. The large display screen and on-screen instructions combined with clearly marked function buttons give users total control enabling them to quickly set their desired conditions and to focus on the job at hand.



Top efficiency year-round


As with all Daikin products, this cassette delivers exceptional seasonal efficiency while the presence sensor has been shown to reduce energy consumption by around 27%*.

By using the controller to monitor performance and energy consumption, users can reduce their environmental impact while maintaining perfect working conditions.

*estimated

Round Flow Cassette : setting the standard for efficiency and comfort


The round flow cassettes FCQG and FCQHG-F series are designed for use in all forms and sizes of commercial offices and retail environments and provide you with a more energy efficient model.

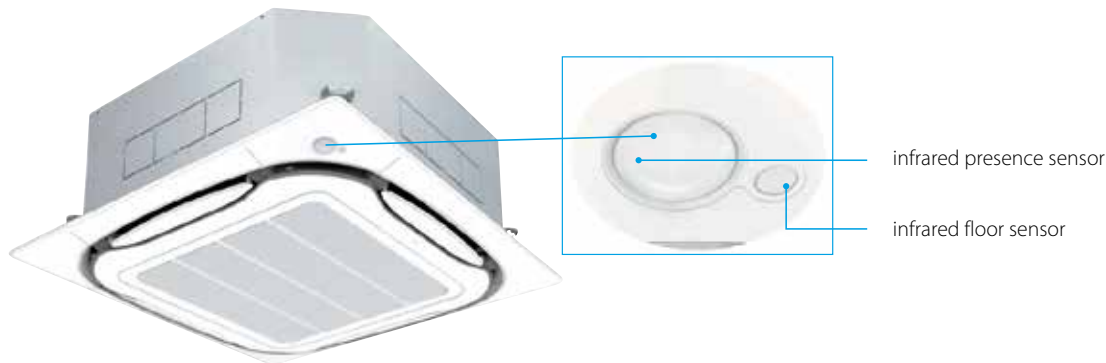

Even more energy efficient


- UNIQUE!**
- Daikin was the first to launch an **auto cleaning Standard panel**. With this panel the costs can be further reduced as the filter cleans itself automatically once a day.
 - Maintenance of the filter is facilitated and so less time is required.
 - Running costs are reduced compared to standard solutions: **up to 50% energy can be saved** thanks to daily filter cleaning (Wolverhampton, UK).

Auto-cleaning panel
saves up to 50% →

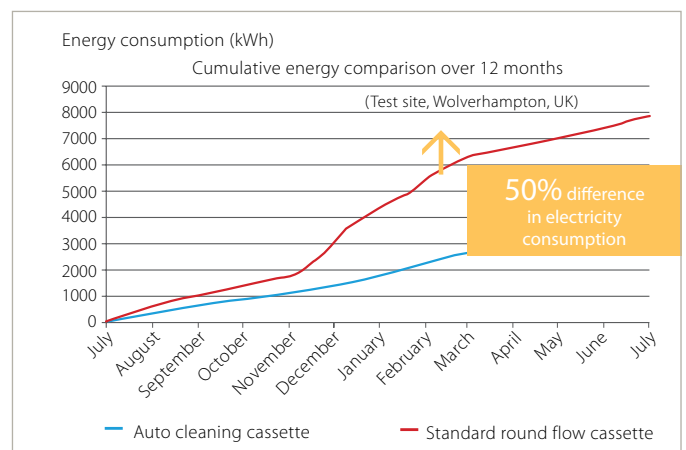

- The optional **presence sensor** adjusts the temperature or switches off the unit when there is nobody in the room. Up to 27% energy can be saved with this new function.
- If no presence is detected in the room for 15mins, the set temperature is changed until a minimum temperature (for heating) or maximum temperature (for cooling) is reached.
- Newly designed **heat exchanger** (diameter pipes are reduced to 5mm instead of 7mm), DC fan motor and DC drain pump enable even more energy to be saved.

Presence sensor
saves up to 27%* →

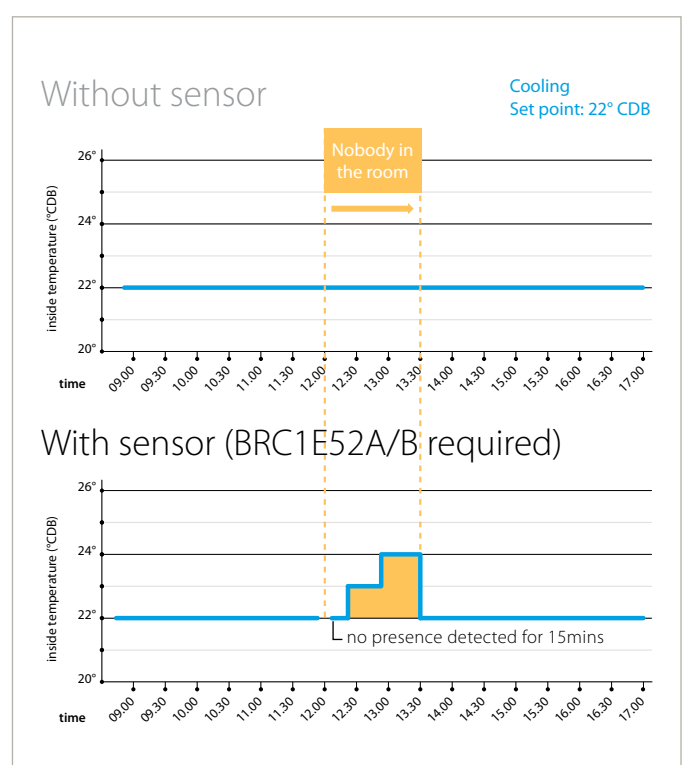

* estimated energy saving




... and improved comfort

- The unique **360° air flow** discharge pattern ensures a uniform temperature distribution across the room without dead corners.



The comfort can be further enhanced thanks to the optional sensors:


- The presence sensor allows air flow control. It directs the air away from any person detected in the room, when the air flow control is on.
- With the **floor sensor** having cold feet becomes history. This sensor detects the average floor temperature and ensures an even temperature distribution between ceiling and floor.

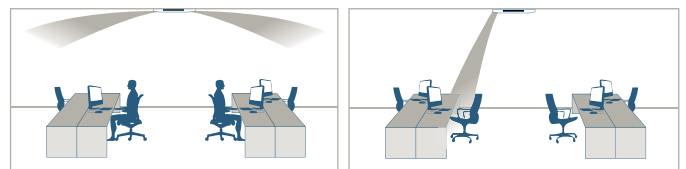

Flexible installation

The round flow cassette offers higher flexibility thanks to:

- The possibility of easily closing one flap via the wired remote controller (BRC1E52A/B - optional), to suit the room configuration. Optional closure kits are available as well.

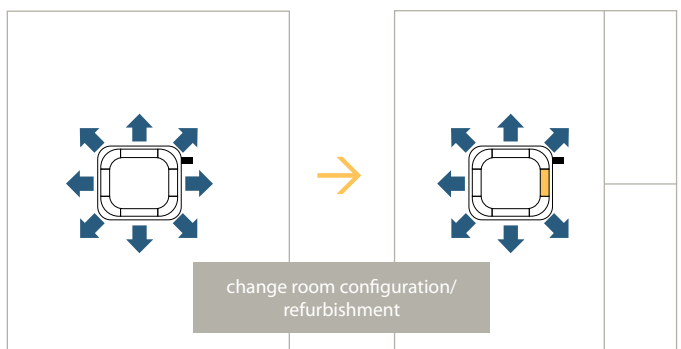

Other features

- Standard DIII-net compatibility – link your cassette into the wider building management system.
- Fresh air intake possible (max. 20%).





Sky Air product range

Sky Air Product portfolio

| | |
|-----------------------------|----|
| Indoor units | 18 |
| Outdoor units | 20 |
| Biddle standard air curtain | 20 |
| Air handling units | 20 |

| | |
|---------------------------|----|
| Benefits overview Sky Air | 22 |
|---------------------------|----|

Pair application

| | |
|-----------------------------------|----|
| Ceiling mounted cassette | 24 |
| Concealed ceiling unit | 32 |
| Wall mounted unit | 40 |
| Ceiling suspended unit | 42 |
| 4-Way blow ceiling suspended unit | 46 |
| Floor standing unit | 48 |

Twin, triple, double twin application

| | |
|------------------|----|
| Seasonal Smart | 51 |
| Seasonal Classic | 52 |
| Super Inverter | 53 |

Multi model application

| | |
|--|----|
| Multi outdoor units | 54 |
| VRVIII-S heat pump for residential application | 55 |

Indoor units

| Type | Model | Product name | |
|--------------------------|---|---------------------|---|
| Ceiling mounted cassette | High COP, round flow cassette <ul style="list-style-type: none"> for shops, restaurants and offices requiring maximum floor space and perfect integration 360° air discharge auto-cleaning function² presence and floor sensor² ensures top performance  | FCQHG-F |  |
| | Round flow cassette <ul style="list-style-type: none"> for shops, restaurants and offices requiring maximum floor space and perfect integration 360° air discharge auto-cleaning function² presence and floor sensor²  | FCQG-F |  |
| | Fully flat cassette <ul style="list-style-type: none"> for smaller spaces and offices requiring maximum floor space and perfect integration design and genius in one integrate fully flat into the ceiling and flush into ceiling tiles presence and floor sensor² | FFQ-C |  |
| | Siesta, 4-way blow ceiling mounted cassette <ul style="list-style-type: none"> for shops requiring maximum floor space and perfect integration solution for basic cooling and heating  | ACQ-C |  |
| Concealed ceiling | Small concealed ceiling unit <ul style="list-style-type: none"> designed for hotel bedrooms compact dimensions to be mounted in a ceiling void drain pan can be located to the left or to the right | FDBQ-B |  |
| | Concealed ceiling unit <ul style="list-style-type: none"> for commercial spaces with no or narrow false ceilings easy installation thanks to automatic air flow adjustment reduced power consumption with DC inverter fans ESP up to 120Pa | FBQ-C8 ¹ |  |
| | Concealed ceiling unit <ul style="list-style-type: none"> for commercial spaces with no or narrow false ceilings easy installation thanks to automatic air flow adjustment reduced power consumption with DC inverter fans ESP up to 200Pa | FDQ-C |  |
| | Large concealed ceiling unit <ul style="list-style-type: none"> for large commercial spaces with no or narrow false ceilings ESP up to 250Pa | FDQ-B ¹ |  |
| | Siesta, concealed ceiling unit <ul style="list-style-type: none"> for shops requiring maximum floor space and perfect integration solution for basic cooling and heating  | ABQ-C |  |
| Wall mounted | Wall mounted unit <ul style="list-style-type: none"> for commercial spaces with no or narrow false ceilings 5 different air discharge angles | FAQ-C |  |
| Ceiling suspended | Ceiling suspended unit <ul style="list-style-type: none"> for commercial spaces with no or narrow false ceilings comfortable air distribution in one direction coanda effect: air discharge up to 100° | FHQ-C |  |
| | 4-way blow ceiling suspended unit <ul style="list-style-type: none"> for commercial spaces with no or narrow false ceilings comfortable air distribution in four directions low energy consumption improved comfort thanks to automatic air flow adjustment to required load | FUQ-C |  |
| | Siesta, ceiling suspended cassette <ul style="list-style-type: none"> for shops with narrow or no false ceiling solution for basic cooling and heating  | AHQ-C |  |
| Floor standing | Floor standing unit <ul style="list-style-type: none"> for commercial spaces with high ceilings perfect comfort thanks to selection of vertical and horizontal out blow patterns improved efficiency thanks to DC fan motor | FVQ-C |  |

[illegible]

Outdoor units Pair, twin, triple & double twin application

| System | Type | Product name | | |
|------------|-----------|--|---------------|--|
| Air cooled | Heat pump | <ul style="list-style-type: none"> for commercial applications and technical rooms best efficiency! most flexible installation widest range of efficient and comfortable connectable indoor units pair, twin, triple, double twin application | RZQG-L8/7V1 | |
| | | | RZQG-L(8)Y1 | |
| | | <ul style="list-style-type: none"> for commercial applications good value for money very efficient and comfortable indoor units pair, twin, triple, double twin application | RZQSG-L3/L8V1 | |
| | | | RZQSG-L(8)Y1 | |
| | | <ul style="list-style-type: none"> for large commercial applications pair, twin, triple, double twin application | RZQ-C | |
| | | <ul style="list-style-type: none"> for shop application basic cooling/heating solution pair application | AZQS-BV1 | |
| | | | AZQS-BY1 | |

Biddle standard air curtain range

| Type | Product name | |
|--|----------------|--|
| Biddle standard air curtain free hanging | CYQ S/M/L-DK-F | |
| Biddle standard air curtain cassette | CYQ S/M/L-DK-C | |
| Biddle standard air curtain recessed | CYQ S/M/L-DK-R | |


For connection with air handling units and biddle air curtain

| System | Type | Product name | |
|------------|-----------|--|--|
| Air cooled | Heat pump | ERQ-AV1 ¹ Condensing Units | <ul style="list-style-type: none"> R-410A inverter condensing units pair application with air handling units |
| | | ERQ-AW1 ¹ Condensing Units | |















1) Only use the condensing units in combinations with an air handling unit.

| Type | Product name | |
|--------------------------|----------------------|---|
| Heat Reclaim Ventilation | VAM-FA/FB | <ul style="list-style-type: none"> for shops, restaurants and offices requiring maximum floor space and perfect integration energy saving ventilation using indoor heating free cooling possible |
| Air handling units | DX fresh air package | <ul style="list-style-type: none"> solution where building constraints occur plug and play installation |

(1) Daikin AHU connected to Daikin chiller solution

| | | | |
|------------------------|---|---|--|
| We care icons |  | Seasonal efficiency - Smart use of energy | Seasonal efficiency gives a more realistic indication on how efficient air conditioners operate over an entire heating or cooling season. |
| |  | Inverter technology | In combination with inverter controlled outdoor units |
| |  | Home leave operation | During absence, the indoor temperature can be maintained at a certain level. |
| |  | Fan only | The air conditioner can be used as fan, blowing air without cooling or heating. |
| |  | Auto cleaning filter | The filter automatically cleans itself once per day. Simplicity of upkeep means optimum energy efficiency and maximum comfort without the need for expensive or time-consuming maintenance. |
| |  | Floor and presence sensor | The presence sensor directs the air away from any person detected in the room, when the air flow control is on. The floor sensor detects the average floor temperature and ensures an even temperature distribution between ceiling and floor. |
| Comfort |  | Draught prevention | When starting to warm up or when the thermostat is off, the air discharge direction is set horizontally and the fan to low speed, to prevent draught. After warming up, air discharge and fan speed are set as desired. |
| |  | Whisper quiet | Daikin indoor units are whisper quiet. Also the outdoor units are guaranteed not to disturb the quiet of the neighbourhood. |
| |  | Auto cooling-heating changeover | Automatically selects cooling or heating mode to achieve the set temperature. |
| Air treatment |  | Air filter | Removes airborne dust particles to ensure a steady supply of clean air. |
| Humidity control |  | Dry programme | Allows humidity levels to be reduced without variations in room temperature. |
| Air flow |  | Ceiling soiling prevention | A special function prevents air blowing out too long in horizontal position, to prevent ceiling stains. |
| |  | Vertical auto swing | Possibility to select automatic vertical moving of the air discharge louvre, for uniform air flow and temperature distribution. |
| |  | Fan speed steps | Allows to select up to the given number of fan speed. |
| |  | Individual flap control | Individual flap control via the wired remote controller makes it simple to fix the position of each flap individually, to suit any new room configuration. Optional closure kits are available as well. |
| Remote control & timer |  | Weekly timer | Timer can be set to start operation anytime on a daily or weekly basis |
| |  | Infrared remote control | Infrared remote control with LCD to start, stop and regulate the air conditioner from a distance. |
| |  | Wired remote control | Wired remote control to start, stop and regulate the air conditioner from a distance. |
| |  | Centralised control | Centralised control to start, stop and regulate several air conditioners from one central point. |
| Other functions |  | Auto-restart | The unit restarts automatically at the original settings after power failure. |
| |  | Self-diagnosis | Simplifies maintenance by indicating system faults or operating anomalies. |
| |  | Drain pump kit | Facilitates condensation draining from the indoor unit. |
| |  | Twin/triple/double twin application | 2, 3 or 4 indoor units can be connected to only 1 outdoor unit even if they have different capacities. All indoor units operate within the same mode (cooling or heating) from one remote control. |
| |  | Multi model application | Up to 5 indoor units (even different capacities) can be connected to a single outdoor unit. All indoor units can individually be operated within the same mode. |
| |  | VRV for residential application | Up to 9 indoor units (even different capacities and up to 71 class) can be connected to a single outdoor unit. All indoor units can individually be operated within the same mode. |

For explanation on the benefits, see the end of this catalogue.

| Ceiling mounted cassette | | | | Concealed ceiling unit | | | | | Ceiling suspended unit | | 4-Way blow ceiling suspended unit | Wall mounted unit | Floor standing unit |
|--|---|---|---|---|---|---|---|---|--|---|---|---|---|
| FCQHG-F | FCQG-F | FFQ-C | ACQ-C | FDBQ-B | FBQ-C8 | FDQ-C | FDQ-B | ABQ-C | FHQ-C | AHQ-C | FUQ-C | FAQ-C | FVQ-C |
|  |  |  |  |  |  |  |  |  |  |  |  |  |  |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | | ✓ | | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | | | | | | | | | | | | |
| ✓ | ✓ | ✓ | | | | | | | | | | | |

| | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | | | | | | | | ✓ | | |
| ✓ | ✓ | ✓ | | ✓ | ✓ | | | | | | | | |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

| | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|

| | | | | | | | | | | | | | |
|---|---|---|--|---|---|---|---|--|---|--|---|---|---|
| ✓ | ✓ | ✓ | | ✓ | ✓ | ✓ | ✓ | | ✓ | | ✓ | ✓ | ✓ |
|---|---|---|--|---|---|---|---|--|---|--|---|---|---|

| | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| ✓ | ✓ | ✓ | ✓ | | | | | | | | | | |
| ✓ | ✓ | ✓ | | | | | | | ✓ | | ✓ | ✓ | ✓ |
| 3 | 3 | 3 | 4 | 2 | 3 | 3 | 2 | 3 | 3 | 3 | 3 | 3 | 3 |
| ✓ | ✓ | ✓ | | | | | | | | | ✓ | | |


| | | | | | | | | | | | | | |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| optional | optional | optional | standard | | optional | | | | optional | standard | optional | optional | |
| optional | optional | optional | optional | optional | optional | optional | optional | standard | optional | optional | optional | optional | optional |
| optional | optional | optional | | | optional | optional | optional | | optional | | optional | optional | optional |

| | | | | | | | | | | | | | |
|----------|----------|----------|----------|---|----------|----------|---|---|----------|---|----------|----------|---|
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| standard | standard | standard | standard | | standard | standard | | | optional | | standard | optional | |
| ✓ | ✓ | ✓ | | | ✓ | ✓ | ✓ | | ✓ | | ✓ | ✓ | |
| | ✓ | ✓ | | ✓ | ✓ | | | | ✓ | | | | |
| | ✓ | ✓ | | ✓ | ✓ | | | | ✓ | | | | |





FCQG35-60F



presence sensor floor sensor
BRYQ140A



RXS-L



BRC1E52A/B
(optional)

BRC7F532F
(optional)



- › The round flow cassette provides a more comfortable environment and offers greater savings in energy consumption to shop, office and restaurant owners
- › **360° air discharge** ensures uniform air flow and temperature distribution
- › Modern style decoration panel is available in 3 different variations: pure white (RAL9010) auto cleaning panel, pure white (RAL9010) standard panel with grey louvers and pure white (RAL9010) standard panel with white louvers
- › Daikin introduces first **auto cleaning cassette** to European market.
- › Higher efficiency and comfort thanks to daily auto cleaning of the filter.
- › Lower maintenance costs thanks to auto cleaning function.
- › Easy dust removal with vacuum cleaner without opening the unit.
- › The **presence sensor** (optional) : adjusts the temperature or switches off the unit when there is nobody in the room - ensures the air flow is directed away from any person detected in the room, when the air flow control is activated
- › The **floor sensor** (optional) detects the average floor temperature and ensures even temperature distribution between ceiling and floor. Cold feet will become history.
- › **Individual flap control**: possibility to adapt the room layout by fixing the position of each flap individually
- › Fresh air intake: up to 20 %
- › **No optional adapter needed for DIII-connection**, link your unit into the wider building management system.



Heating & Cooling


| Indoor unit | | | | FCQG35F | FCQG50F | FCQG60F |
|---|------------------------------|---------------------------|--------|---------------------------------------|---------------|---------------|
| Cooling capacity | Min./Nom./Max. | | kW | 1.3/3.4/4.0 | 1.7/5.0/5.3 | 1.7/5.7/5.7 |
| Heating capacity | Min./Nom./Max. | | kW | 1.3/4.20/5.2 | 1.7/6.00/6.0 | 1.7/7.0/7.0 |
| Power input | Cooling | Min./Nom./Max. | kW | 0.400/0.950/1.100 | -/1.410/- | -/1.640/- |
| | Heating | Min./Nom./Max. | kW | 0.230/1.200/1.840 | -/1.620/- | -/1.990/- |
| Seasonal efficiency (according to EN14825) | Cooling | Energy label | | | A++ | |
| | | Pdesign | kW | 3.50 | 5.00 | 5.70 |
| | | SEER | | 6.35 | 6.48 | 6.22 |
| | | Annual energy consumption | kWh | 193 | 270 | 321 |
| | Heating (Average climate) | Energy label | | | A++ | A+ |
| | | Pdesign | kW | 3.32 | 4.36 | 4.71 |
| | | SCOP | | 4.90 | 4.29 | 4.00 |
| | | Annual energy consumption | kWh | 949 | 1,426 | 1,646 |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | 3.58 | 3.55 | 3.48 |
| | COP | | | 3.50 | 3.7 | 3.52 |
| | Annual energy consumption | kWh | | 475 | 705 | 820 |
| | Energy label | Cooling/Heating | | A/B | A/A | A/B |
| Dimensions | Unit | HeightxWidthxDepth | mm | 204x840x840 | | |
| Weight | Unit | | kg | 18 | 19 | |
| Decoration panel | Model | | | BYCQ140D7W1/BYCQ140D7W1W/BYCQ140D7GW1 | | |
| | Colour | | | Pure White (RAL 9010)/ | | |
| | Dimensions | HeightxWidthxDepth | mm | 60x950x950/950x60x950/145x950x950 | | |
| | Weight | | kg | 5.4/5.4/10.3 | | |
| Fan - Air flow rate | Cooling | High/Nom./Low | m³/min | 12.5/10.6/8.7 | 12.6/10.7/8.7 | 13.6/11.2/8.7 |
| | Heating | High/Nom./Low | m³/min | 12.5/10.6/8.7 | 12.6/10.7/8.7 | 13.6/11.2/8.7 |
| Sound power level | Cooling | | dBA | 49 | | 51 |
| | Heating | | dBA | 49 | | 51 |
| Sound pressure level | Cooling | High/Nom./Low | dBA | 31/29/27 | | 33/31/28 |
| | Heating | High/Nom./Low | dBA | 31/29/27 | | 33/31/28 |
| Piping connections | Liquid | OD | mm | 6.35 | | |
| | Gas | OD | mm | 9.5 | 12.70 | |
| Power supply | Phase / Frequency / Voltage | | Hz / V | 1~ / 50 / 220-240 | | |

| Outdoor unit | | | | RXS35L | | RXS50L | | RXS60L | |
|----------------------|-----------------------------|---------------------------|--------------|--------|-------------------|--------|-----------------------|--------|-----------|
| Dimensions | Unit | HeightxWidthxDepth | | mm | 550x765x285 | | 735x825x300 | | |
| Weight | Unit | | | kg | 34 | | 47 | | 48 |
| Fan - Air flow rate | Cooling | High/Super low | | m³/min | 36.0/30.1 | | 50.9/48.9 | | 50.2/45.0 |
| | Heating | High/Super low | | m³/min | 28.3/25.6 | | 45.0/43.1 | | 46.3/46 |
| Sound power level | Cooling | | | dBA | 61 | | 62 | | |
| | Heating | | | dBA | 61 | | 62 | | |
| Sound pressure level | Cooling | High/Low/Silent operation | | dBA | 48/-/44 | | 48/44/- | | 49/46/- |
| | Heating | High/Low/Silent operation | | dBA | 48/-/45 | | 48/45/- | | 49/46/- |
| Operation range | Cooling | Ambient Min.~Max. | | °CDB | -10~46 | | | | |
| | Heating | Ambient Min.~Max. | | °CWB | -15~18 | | | | |
| Refrigerant | Type/GWP | | R-410A/1,975 | | | | | | |
| Piping connections | Piping length | OU - IU | Max. | m | 20 | | 30 | | |
| | Level difference | IU - OU | Max. | m | 15 | | 20.0 | | |
| Power supply | Phase / Frequency / Voltage | | | Hz / V | 1~ / 50 / 220-240 | | 1~ / 50 / 220-230-240 | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | A | - | | | | |

(1) EER/COP according to Eurovent 2012, for use outside EU only (2) The BYCQ140D7W1W has white insulations. Be informed that formation of dirt on white insulation is visibly stronger and that it is consequently not advised to install the BYCQ140D7W1W decoration panel in environments exposed to concentrations of dirt. (3) BYCQ140D7W1: pure white standard panel with grey louvers; BYCQ140D7W1W: pure white standard panel with white louvers; BYCQ140D7GW1: pure white auto cleaning panel.



FCQG100-140F



BRYQ140A



RZQG100-140L8/7V1/L(8)Y1




BRC1E52A/B (optional) BRC7FA532F (optional)



- > The round flow cassette provides a more comfortable environment and offers greater savings in energy consumption to shop, office and restaurant owners
- > **360° air discharge** ensures uniform air flow and temperature distribution
- > Modern style decoration panel is available in 3 different variations: pure white (RAL9010) auto cleaning panel, pure white (RAL9010) standard panel with grey louvers and pure white (RAL9010) standard panel with white louvers
- > Daikin introduces first **auto cleaning cassette** to European market.
- > Higher efficiency and comfort thanks to daily auto cleaning of the filter.
- > Lower maintenance costs thanks to auto cleaning function.
- > Easy dust removal with vacuum cleaner without opening the unit.
- > The **presence sensor** (optional) : adjusts the temperature or switches off the unit when there is nobody in the room - ensures the air flow is directed away from any person detected in the room, when the air flow control is activated
- > The **floor sensor** (optional) detects the average floor temperature and ensures even temperature distribution between ceiling and floor. Cold feet will become history.
- > **Individual flap control**: possibility to adapt the room layout by fixing the position of each flap individually
- > Fresh air intake: up to 20 %
- > **No optional adapter needed for DIII-connection**, link your unit into the wider building management system.

Heating & Cooling




| Indoor unit | | | | FCQG71F | FCQG100F | FCQG125F | FCQG140F | FCQG71F | FCQG100F | FCQG125F | FCQG140F | |
|--|------------------------------|---------------------------|----------------|---------------------------------------|--------------------|----------------|-------------|---------------|--------------------|----------------|---------------|----|
| Cooling capacity | Min./Nom./Max. | | kW | -/6.8/- | -/9.5/- | -/12.0/- | -/13.4/- | -/6.8/- | -/9.5/- | -/12.0/- | -/13.4/- | |
| Heating capacity | Min./Nom./Max. | | kW | -/7.5/- | -/10.8/- | -/13.5/- | -/15.5/- | -/7.5/- | -/10.8/- | -/13.5/- | -/15.5/- | |
| Power input | Cooling | Nom. | kW | 2.01 | 2.45 | 3.22 | 4.17 | 2.01 | 2.45 | 3.22 | 4.17 | |
| | Heating | Nom. | kW | 1.89 | 2.60 | 3.72 | 4.30 | 1.89 | 2.60 | 3.72 | 4.30 | |
| Seasonal efficiency (according to EN14825)  | Cooling | Energy label | | A++ | | A+ | - | A++ | | A+ | - | |
| | | Pdesign | kW | 6.80 | 9.50 | 12.00 | - | 6.80 | 9.50 | 12.00 | - | |
| | | SEER | | 6.80 | | 6.00 | | - | 6.80 | | 6.00 | |
| | | Annual energy consumption | kWh | 350 | 488 | 700 | - | 350 | 488 | 700 | - | |
| | Heating (Average climate) | Energy label | | A+ | | A++ | A+ | - | A+ | A++ | A+ | - |
| | | Pdesign | kW | 6.33 | 11.30 | 12.66 | - | 6.33 | 11.30 | 12.66 | - | |
| | | SCOP | | 4.20 | 4.61 | 4.10 | - | 4.20 | 4.61 | 4.10 | - | |
| | | Annual energy consumption | kWh | 2,110 | 3,431 | 4,322 | - | 2,110 | 3,431 | 4,322 | - | |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | 3.39 | 3.87 | 3.73 | 3.21 | 3.39 | 3.87 | 3.73 | 3.21 | |
| | COP | | | 3.97 | 4.15 | 3.63 | 3.61 | 3.97 | 4.15 | 3.63 | 3.61 | |
| | Annual energy consumption | | kWh | 1,005 | 1,225 | 1,610 | 2,085 | 1,005 | 1,225 | 1,610 | 2,085 | |
| | Energy label | Cooling/Heating | | A/A | | | - | A/A | | | - | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 204x840x840 | | | 246x840x840 | | 204x840x840 | | 246x840x840 | |
| Weight | Unit | | kg | 21 | | | 24 | | 21 | | 24 | |
| Decoration panel | Model | | | BYCQ140D7W1/BYCQ140D7W1W/BYCQ140D7GW1 | | | | | | | | |
| | Colour | | | Pure White (RAL 9010) | | | | | | | | |
| | Dimensions | HeightxWidthxDepth | mm | 60x950x950/950x60x950/145x950x950 | | | | | | | | |
| | Weight | | kg | 5.4/5.4/10.3 | | | | | | | | |
| Fan - Air flow rate | Cooling | High/Nom./Low | m³/min | 15.0/12.1/9.1 | 22.8/17.6/12.4 | 26.0/19.2/12.4 | | 15.0/12.1/9.1 | 22.8/17.6/12.4 | 26.0/19.2/12.4 | | |
| | Heating | High/Nom./Low | m³/min | 15.0/12.1/9.1 | 22.8/17.6/12.4 | 26.0/19.2/12.4 | | 15.0/12.1/9.1 | 22.8/17.6/12.4 | 26.0/19.2/12.4 | | |
| Sound power level | Cooling | | dBA | 51 | 54 | 58 | | 51 | 54 | 58 | | |
| | Heating | | dBA | 51 | 54 | 58 | | 51 | 54 | 58 | | |
| Sound pressure level | Cooling | High/Nom./Low | dBA | 33/31/28 | 37/33/29 | 41/35/29 | | 33/31/28 | 37/33/29 | 41/35/29 | | |
| | Heating | High/Nom./Low | dBA | 33/31/28 | 37/33/29 | 41/35/29 | | 33/31/28 | 37/33/29 | 41/35/29 | | |
| Piping connections | Liquid | OD | mm | 9.52 | | | | | | | | |
| | Gas | OD | mm | 15.9 | | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | Hz / V | 1 ~ / 50 / 220-240 | | | | | | | |
| Outdoor unit | | | | RZQG71L8V1 | RZQG100L8V1 | RZQG125L8V1 | RZQG140L7V1 | RZQG71L8Y1 | RZQG100L8Y1 | RZQG125L8Y1 | RZQG140LY1 | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 990x940x320 | | 1,430x940x320 | | | 990x940x320 | | 1,430x940x320 | |
| Weight | Unit | | kg | 78 | | 102 | | | 80 | | 101 | |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 59 | | 70 | | 84 | 59 | 70 | | 84 |
| | Heating | Nom. | m³/min | 49 | | 62 | | | 49 | 62 | | |
| Sound power level | Cooling | | dBA | 64 | 66 | 67 | 69 | 64 | 66 | 67 | 69 | |
| Sound pressure level | Cooling | Nom. | dBA | 48 | 50 | 51 | 52 | 48 | 50 | 51 | 52 | |
| | Heating | Nom. | dBA | 50 | 52 | 53 | | 50 | 52 | 53 | | |
| | Night quiet mode | Level 1 | dBA | 43 | 45 | | | 43 | 45 | | | |
| Operation range | Cooling | Ambient | Min.~Max. °CDB | -15~50 | | | | | | | | |
| | Heating | Ambient | Min.~Max. °CWB | -20~15.5 | | | | | | | | |
| Refrigerant | Type/GWP | | | R-410A/1,975 | | | | | | | | |
| Piping connections | Piping length | OU - IU | Max. | m | 50 | 75 | | | 50 | 75 | | |
| | | System | Equivalent | m | 70 | 90 | | | 70 | 90 | | |
| | Level difference | IU - OU | Max. | m | 30.0 | | | | | | | |
| | | IU - IU | Max. | m | 0.5 | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | Hz / V | 1 ~ / 50 / 220-240 | | | | 3N~ / 50 / 380-415 | | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | A | 20 | 32 | | | 16 | 20 | | |

(1) EER/COP according to Eurovent 2012 (2) The BYCQ140D7W1W has white insulations. Be informed that formation of dirt on white insulation is visibly stronger and that it is consequently not advised to install the BYCQ140D7W1W decoration panel in environments exposed to concentrations of dirt. (3) BYCQ140D7W1: pure white standard panel with grey louvers; BYCQ140D7W1W: pure white standard panel with white louvers; BYCQ140D7GW1: pure white auto cleaning panel.



Heating & Cooling


Seasonal Classic

| Indoor unit | | | | FCQG71F | FCQG100F | FCQG125F | FCQG140F | FCQG100F | FCQG125F | FCQG140F | |
|--|------------------------------|---------------------------|----------------|---------------------------------------|----------------|----------------|-------------|--------------------|----------------|-------------|---------------|
| Cooling capacity | Min./Nom./Max. | | kW | -/6.8/- | -/9.5/- | -/12.0/- | -/13.4/- | -/9.5/- | -/12.0/- | -/13.4/- | |
| Heating capacity | Min./Nom./Max. | | kW | -/7.5/- | -/10.8/- | -/13.5/- | -/15.5/- | -/10.8/- | -/13.5/- | -/15.5/- | |
| Power input | Cooling | Nom. | kW | 2.12 | 2.88 | 3.74 | 4.45 | 2.88 | 3.74 | 4.45 | |
| | Heating | Nom. | kW | 2.08 | 3.05 | 3.96 | 4.54 | 3.05 | 3.96 | 4.54 | |
| Seasonal efficiency (according to EN14825)  | Cooling | Energy label | | A++ | | A | - | A++ | A | - | |
| | | Pdesign | kW | 6.80 | 9.50 | 12.00 | - | 9.50 | 12.00 | - | |
| | | SEER | | 6.10 | 6.50 | 5.30 | - | 6.50 | 5.30 | - | |
| | | Annual energy consumption | kWh | 390 | 511 | 792 | - | 511 | 792 | - | |
| | Heating (Average climate) | Energy label | | A+ | | - | - | A+ | - | - | |
| | | Pdesign | kW | 6.33 | 7.60 | 8.03 | - | 7.60 | 8.03 | - | |
| | | SCOP | | 4.10 | | 4.01 | - | 4.10 | 4.01 | - | |
| | Annual energy consumption | kWh | 2,162 | 2,595 | 2,803 | - | 2,595 | 2,803 | - | | |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | 3.21 | 3.30 | 3.21 | 3.01 | 3.30 | 3.21 | 3.01 | |
| | COP | | | 3.61 | 3.54 | 3.41 | | 3.54 | 3.41 | | |
| | Annual energy consumption | | kWh | 1,060 | 1,440 | 1,870 | 2,225 | 1,440 | 1,870 | 2,225 | |
| | Energy label | Cooling/Heating | | A/A | | A/B | - | A/B | | - | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 204x840x840 | | | | | | | 246x840x840 |
| Weight | Unit | | kg | 21 | | | | | | | 24 |
| Decoration panel | Model | | | BYCQ140D7W1/BYCQ140D7W1W/BYCQ140D7GW1 | | | | | | | |
| | Colour | | | Pure White (RAL 9010) | | | | | | | |
| | Dimensions | HeightxWidthxDepth | mm | 60x950x950/950x60x950/145x950x950 | | | | | | | |
| | Weight | | kg | 5.4/5.4/10.3 | | | | | | | |
| Fan - Air flow rate | Cooling | High/Nom./Low | m³/min | 15.0/12.1/9.1 | 22.8/17.6/12.4 | 26.0/19.2/12.4 | | 22.8/17.6/12.4 | 26.0/19.2/12.4 | | |
| | Heating | High/Nom./Low | m³/min | 15.0/12.1/9.1 | 22.8/17.6/12.4 | 26.0/19.2/12.4 | | 22.8/17.6/12.4 | 26.0/19.2/12.4 | | |
| Sound power level | Cooling | | dBA | 51 | 54 | 58 | | 54 | 58 | | |
| | Heating | | dBA | 51 | 54 | 58 | | 54 | 58 | | |
| Sound pressure level | Cooling | High/Nom./Low | dBA | 33/31/28 | 37/33/29 | 41/35/29 | | 37/33/29 | 41/35/29 | | |
| | Heating | High/Nom./Low | dBA | 33/31/28 | 37/33/29 | 41/35/29 | | 37/33/29 | 41/35/29 | | |
| Piping connections | Liquid | OD | mm | 9.52 | | | | | | | |
| | Gas | OD | mm | 15.9 | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | Hz / V | 1~ / 50 / 220-240 | | | | | | | |
| Outdoor unit | | | | RZQSG71L3V1 | RZQSG100L8V1 | RZQSG125L8V1 | RZQSG140LV1 | RZQSG100L8Y1 | RZQSG125L8Y1 | RZQSG140LY1 | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 770x900x320 | | 990x940x320 | | 1,430x940x320 | 990x940x320 | | 1,430x940x320 |
| Weight | Unit | | kg | 67 | 81 | | 102 | 82 | | 101 | |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 52 | 76 | 77 | 83 | 76 | 77 | 83 | |
| | Heating | Nom. | m³/min | 48 | 83 | | 62 | 83 | | 62 | |
| Sound power level | Cooling | | dBA | 65 | 69 | 70 | 69 | | 70 | 69 | |
| Sound pressure level | Cooling | Nom./Silent operation | dBA | 49/47 | 53/49 | 54/49 | 53/49 | 53/- | 54/- | 53/- | |
| | Heating | Nom. | dBA | 51 | 57 | 58 | 54 | 57 | 58 | 54 | |
| | Night quiet mode | Level 1 | dBA | - | | | | | 49 | | |
| Operation range | Cooling | Ambient | Min.~Max. °CDB | -15~46 | | | | | | | |
| | Heating | Ambient | Min.~Max. °CWB | -15~15.5 | | | | | | | |
| Refrigerant | Type/GWP | | | R-410A/1,975 | | | | | | | |
| Piping connections | Piping length | OU - IU | Max. m | 50 | | | | | | | |
| | | System Equivalent | m | 40 | 70 | | | | | | |
| | Level difference | IU - OU | Max. m | 30 | | | | | | | |
| IU - IU | | Max. m | 0.5 | | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | Hz / V | 1~ / 50 / 220-240 | | | | 3N~ / 50 / 380-415 | | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | A | 20 | 32 | | | | 20 | | |

(1) EER/COP according to Eurovent 2012, for use outside EU only. The BYCQ140D7W1W has white insulations. Be informed that formation of dirt on white insulation is visibly stronger and that it is consequently not advised to install the BYCQ140D7W1W decoration panel in environments exposed to concentrations of dirt. (3) BYCQ140D7W1: pure white standard panel with grey louvers; BYCQ140D7W1W: pure white standard panel with white louvers; BYCQ140D7GW1: pure white auto cleaning panel.



FCQHG71-140F



presence sensor
BRYQ140A floor sensor



RZQG100-140L8/7V1/L(8)Y1




BRC1E52A/B (optional)
BRC7FA532F (optional)



- > **High COP cassette ensures top energy performance**
- > The round flow cassette provides a more comfortable environment and offers greater savings in energy consumption to shop, office and restaurant owners
- > **360° air discharge** ensures uniform air flow and temperature distribution
- > Modern style decoration panel is available in 3 different variations: pure white (RAL9010) auto cleaning panel, pure white (RAL9010) standard panel with grey louvers and pure white (RAL9010) standard panel with white louvers
- > Daikin introduces first **auto cleaning cassette** to European market.
- > Higher efficiency and comfort thanks to daily auto cleaning of the filter.
- > Lower maintenance costs thanks to auto cleaning function.
- > Easy dust removal with vacuum cleaner without opening the unit.
- > The **presence sensor** (optional) : adjusts the temperature or switches off the unit when there is nobody in the room - ensures the air flow is directed away from any person detected in the room, when the air flow control is activated
- > The **floor sensor** (optional) detects the average floor temperature and ensures even temperature distribution between ceiling and floor. Cold feet will become history.
- > **Individual flap control**: possibility to adapt the room layout by fixing the position of each flap individually
- > Fresh air intake: up to 20 %
- > **No optional adapter needed for DIII-connection**, link your unit into the wider building management system.

Heating & Cooling



| Indoor unit | | | | FCQHG71F | | FCQHG100F | | FCQHG125F | | FCQHG140F | | FCQHG71F | | FCQHG100F | | FCQHG125F | | FCQHG140F | | | | |
|--|------------------------------|---------------------------|--|---------------------------------------|-----|---------------------------------------|-------|----------------|-------|----------------|-------|----------------|------|----------------|-------|----------------|-------|----------------|-------|----------------|------|--|
| Cooling capacity | Min./Nom./Max. | | | kW | | -/6.8/- | | -/9.5/- | | -/12.0/- | | -/13.4/- | | -/6.8/- | | -/9.5/- | | -/12.0/- | | -/13.4/- | | |
| Heating capacity | Min./Nom./Max. | | | kW | | -/7.5/- | | -/10.8/- | | -/13.5/- | | -/15.5/- | | -/7.5/- | | -/10.8/- | | -/13.5/- | | -/15.5/- | | |
| Power input | Cooling | Nom. | | kW | | 1.66 | | 2.15 | | 3.00 | | 4.00 | | 1.66 | | 2.15 | | 3.00 | | 4.00 | | |
| | Heating | Nom. | | kW | | 1.56 | | 2.16 | | 3.07 | | 3.77 | | 1.56 | | 2.16 | | 3.07 | | 3.77 | | |
| Seasonal efficiency (according to EN14825)  | Cooling | Energy label | | | | | A++ | | | | - | | | | A++ | | | | - | | | |
| | | Pdesign | | | kW | | 6.80 | | 9.50 | | 12.00 | | - | | 6.80 | | 9.50 | | 12.00 | | - | |
| | | SEER | | | | | 7.00 | | | | 6.61 | | - | | 7.00 | | | | 6.61 | | - | |
| | | Annual energy consumption | | | kWh | | 340 | | 475 | | 635 | | - | | 340 | | 475 | | 635 | | - | |
| | Heating (Average climate) | Energy label | | | | | A+ | | | | A++ | | - | | A+ | | | | A++ | | - | |
| | | Pdesign | | | kW | | 7.60 | | 11.30 | | 12.66 | | - | | 7.60 | | 11.30 | | 12.66 | | - | |
| | | SCOP | | | | | 4.54 | | 4.80 | | 4.63 | | - | | 4.54 | | 4.80 | | 4.63 | | - | |
| | | Annual energy consumption | | | kWh | | 2,343 | | 3,295 | | 3,829 | | - | | 2,343 | | 3,295 | | 3,829 | | - | |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | | | | 4.09 | | 4.42 | | 4.00 | | 3.35 | | 4.09 | | 4.42 | | 4.00 | | 3.35 | |
| | COP | | | | | | 4.80 | | 4.99 | | 4.40 | | 4.12 | | 4.80 | | 4.99 | | 4.40 | | 4.12 | |
| | Annual energy consumption | | | kWh | | 830 | | 1,075 | | 1,500 | | 2,000 | | 830 | | 1,075 | | 1,500 | | 2,000 | | |
| | Energy label | Cooling/Heating | | | | | A/A | | | | - | | | | A/A | | | | - | | | |
| Dimensions | Unit | HeightxWidthxDepth | | mm | | 288x840x840 | | | | | | | | | | | | | | | | |
| Weight | Unit | | | kg | | 25 | | 26 | | | | | | 25 | | 26 | | | | | | |
| Decoration panel | Model | | | BYCQ140D7W1/BYCQ140D7W1W/BYCQ140D7GW1 | | | | | | | | | | | | | | | | | | |
| | Colour | | | Pure White (RAL 9010) | | | | | | | | | | | | | | | | | | |
| | Dimensions | HeightxWidthxDepth | | mm | | 60x950x950 / 950x60x950 / 145x950x950 | | | | | | | | | | | | | | | | |
| Fan - Air flow rate | Cooling | High/Nom./Low | | m³/min | | 21.2/16.7/12.2 | | 32.3/25.7/19.0 | | 33.5/26.7/19.9 | | 33.5/27.3/21.1 | | 21.2/16.7/12.2 | | 32.3/25.7/19.0 | | 33.5/26.7/19.9 | | 33.5/27.3/21.1 | | |
| | Heating | High/Nom./Low | | m³/min | | 21.2/16.7/12.2 | | 32.3/25.7/19.0 | | 33.5/26.7/19.9 | | 33.5/27.3/21.1 | | 21.2/16.7/12.2 | | 32.3/25.7/19.0 | | 33.5/26.7/19.9 | | 33.5/27.3/21.1 | | |
| Sound power level | Cooling | | | | dBA | | 53 | | 61 | | | | 53 | | 61 | | | | | | | |
| | Heating | | | | dBA | | 53 | | 61 | | | | 53 | | 61 | | | | | | | |
| Sound pressure level | Cooling | High/Nom./Low | | dBA | | 36/33/29 | | 44/39/33 | | 45/40/35 | | 45/41/37 | | 36/33/29 | | 44/39/33 | | 45/40/35 | | 45/41/37 | | |
| | Heating | High/Nom./Low | | dBA | | 36/33/29 | | 44/39/33 | | 45/40/35 | | 45/41/37 | | 36/33/29 | | 44/39/33 | | 45/40/35 | | 45/41/37 | | |
| Piping connections | Liquid | OD | | mm | | 9.52 | | | | | | | | | | | | | | | | |
| | Gas | OD | | mm | | 15.9 | | | | | | | | | | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | Hz / V | | 1 ~ / 50 / 220-240 | | | | | | | | | | | | | | | | |


| Outdoor unit | | | | | RZQG71L8V1 | RZQG100L8V1 | RZQG125L8V1 | RZQG140L7V1 | RZQG71L8Y1 | RZQG100L8Y1 | RZQG125L8Y1 | RZQG140LY1 | | | | | | | | | | | | |
|----------------------|-----------------------------|--------------------|------------|------|-------------|-------------|---------------|-------------|--------------------|-------------|---------------|------------|--------------------|--|----|--|----|--|----|--|----|--|--|--|
| Dimensions | Unit | HeightxWidthxDepth | | mm | 990x940x320 | | 1,430x940x320 | | 990x940x320 | | 1,430x940x320 | | | | | | | | | | | | | |
| Weight | Unit | | | kg | 78 | | 102 | | 80 | | 101 | | | | | | | | | | | | | |
| Fan - Air flow rate | Cooling | Nom. | m³/min | | 59 | | 70 | | 84 | | 59 | | 70 | | 84 | | | | | | | | | |
| | Heating | Nom. | m³/min | | 49 | | 62 | | 49 | | 62 | | | | | | | | | | | | | |
| Sound power level | Cooling | | | dBA | 64 | | 66 | | 67 | | 69 | | 64 | | 66 | | 67 | | 69 | | | | | |
| Sound pressure level | Cooling | Nom. | dBA | | 48 | | 50 | | 51 | | 52 | | 48 | | 50 | | 51 | | 52 | | | | | |
| | Heating | Nom. | dBA | | 50 | | 52 | | 53 | | | | 50 | | 52 | | 53 | | | | | | | |
| | Night quiet mode | Level 1 | dBA | | 43 | | | | 45 | | | | 43 | | | | 45 | | | | | | | |
| Operation range | Cooling | Ambient | Min.~Max. | °CDB | | | | | | | | | -15~50 | | | | | | | | | | | |
| | Heating | Ambient | Min.~Max. | °CWB | | | | | | | | | -20~15.5 | | | | | | | | | | | |
| Refrigerant | Type/GWP | | | | | | | | | | | | R-410A/1,975 | | | | | | | | | | | |
| Piping connections | Piping length | OU - IU | Max. | m | 50 | | 75 | | 50 | | 75 | | | | | | | | | | | | | |
| | | System | Equivalent | m | 70 | | 90 | | 70 | | 90 | | | | | | | | | | | | | |
| | Level difference | IU - OU | Max. | m | | | | | | | | | 30.0 | | | | | | | | | | | |
| | | IU - IU | Max. | m | | | | | | | | | 0.5 | | | | | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | | Hz / V | | | | 1 ~ / 50 / 220-240 | | | | 3N~ / 50 / 380-415 | | | | | | | | | | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | | A | | | | 20 | | | | 32 | | | | 16 | | | | 20 | | | |

(1) EER/COP according to Eurovent 2012, for use outside EU only



Heating & Cooling

Seasonal Classic

| Indoor unit | | | | FCQHG71F | FCQHG100F | FCQHG125F | FCQHG140F | FCQHG100F | FCQHG125F | FCQHG140F | |
|--|------------------------------|---------------------------|--------|---------------------------------------|----------------|----------------|----------------|----------------|----------------|----------------|---|
| Cooling capacity | Min./Nom./Max. | | kW | -/6.8/- | -/9.5/- | -/12.0/- | -/13.4/- | -/9.5/- | -/12.0/- | -/13.4/- | |
| Heating capacity | Min./Nom./Max. | | kW | -/7.5/- | -/10.8/- | -/13.5/- | -/15.5/- | -/10.8/- | -/13.5/- | -/15.5/- | |
| Power input | Cooling | Nom. | kW | 1.94 | 2.57 | 3.71 | 4.17 | 2.57 | 3.71 | 4.17 | |
| | Heating | Nom. | kW | 1.83 | 2.51 | 3.60 | 4.29 | 2.51 | 3.60 | 4.29 | |
| <div></div> Seasonal efficiency (according to EN14825) | Cooling | Energy label | | A++ | | A | | A++ | | A | |
| | | Pdesign | | kW | 6.80 | 9.50 | 12.00 | - | 9.50 | 12.00 | - |
| | | SEER | | | 6.50 | 6.70 | 5.40 | - | 6.70 | 5.40 | - |
| | | Annual energy consumption | | kWh | 366 | 496 | 777 | - | 496 | 777 | - |
| | Heating (Average climate) | Energy label | | A+ | | - | | A+ | | - | |
| | | Pdesign | | kW | 7.60 | 8.03 | | - | | 8.03 | |
| | | SCOP | | | 4.15 | 4.30 | 4.10 | - | 4.30 | 4.10 | - |
| | | Annual energy consumption | | kWh | 2,563 | 2,614 | 2,741 | - | 2,614 | 2,741 | - |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | 3.50 | 3.70 | 3.23 | 3.21 | 3.70 | 3.23 | 3.21 | |
| | COP | | | 4.10 | 4.30 | 3.75 | 3.61 | 4.30 | 3.75 | 3.61 | |
| | Annual energy consumption | | kWh | 970 | 1,285 | 1,855 | 2,085 | 1,285 | 1,855 | 2,085 | |
| | Energy label | Cooling/Heating | A/A | | | | - | | A/A | | - |
| Dimensions | Unit | HeightxWidthxDepth | mm | 288x840x840 | | | | | | | |
| Weight | Unit | | kg | 25 | 26 | | | | | | |
| Decoration panel | Model | | | BYCQ140D7W1/BYCQ140D7W1W/BYCQ140D7GW1 | | | | | | | |
| | Colour | | | Pure White (RAL 9010) | | | | | | | |
| | Dimensions | HeightxWidthxDepth | mm | 60x950x950/950x60x950/145x950x950 | | | | | | | |
| | Weight | | kg | 5.4/5.4/10.3 | | | | | | | |
| Fan - Air flow rate | Cooling | High/Nom./Low | m³/min | 21.2/16.7/12.2 | 32.3/25.7/19.0 | 33.5/26.7/19.9 | 33.5/27.3/21.1 | 32.3/25.7/19.0 | 33.5/26.7/19.9 | 33.5/27.3/21.1 | |
| | Heating | High/Nom./Low | m³/min | 21.2/16.7/12.2 | 32.3/25.7/19.0 | 33.5/26.7/19.9 | 33.5/27.3/21.1 | 32.3/25.7/19.0 | 33.5/26.7/19.9 | 33.5/27.3/21.1 | |
| Sound power level | Cooling | | dBA | 53 | 61 | | | | | | |
| | Heating | | dBA | 53 | 61 | | | | | | |
| Sound pressure level | Cooling | High/Nom./Low | dBA | 36/33/29 | 44/39/33 | 45/40/35 | 45/41/37 | 44/39/33 | 45/40/35 | 45/41/37 | |
| | Heating | High/Nom./Low | dBA | 36/33/29 | 44/39/33 | 45/40/35 | 45/41/37 | 44/39/33 | 45/40/35 | 45/41/37 | |
| Piping connections | Liquid | OD | mm | 9.52 | | | | | | | |
| | Gas | OD | mm | 15.9 | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | Hz / V | 1~ / 50 / 220-240 | | | | | | | |

| Outdoor unit | | | | RZQSG71L3V1 | RZQSG100L8V1 | RZQSG125L8V1 | RZQSG140L1V1 | RZQSG100L8Y1 | RZQSG125L8Y1 | RZQSG140LY1 |
|----------------------|-----------------------------|-----------------------|-----------|-------------------|--------------|--------------|---------------|--------------|--------------------|---------------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 770x900x320 | 990x940x320 | | 1,430x940x320 | 990x940x320 | | 1,430x940x320 |
| Weight | Unit | | kg | 67 | 81 | | 102 | 82 | | 101 |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 52 | 76 | 77 | 83 | 76 | 77 | 83 |
| | Heating | Nom. | m³/min | 48 | 83 | | 62 | 83 | | 62 |
| Sound power level | Cooling | | dBA | 65 | 69 | 70 | 69 | | 70 | 69 |
| Sound pressure level | Cooling | Nom./Silent operation | dBA | 49/47 | 53/49 | 54/49 | 53/49 | 53/- | 54/- | 53/- |
| | Heating | Nom. | dBA | 51 | 57 | 58 | 54 | 57 | 58 | 54 |
| | Night quiet mode | Level 1 | dBA | | | | | | | 49 |
| Operation range | Cooling | Ambient | Min.~Max. | °CDB -15~-46 | | | | | | |
| | Heating | Ambient | Min.~Max. | °CWB -15~-15.5 | | | | | | |
| Refrigerant | Type/GWP | | | R-410A/1,975 | | | | | | |
| Piping connections | Piping length | | OU - IU | Max. | m | | | | | |
| | | | System | Equivalent | m | | | | | |
| | Level difference | | IU - OU | Max. | m | | | | | |
| | | | IU - IU | Max. | m | | | | | |
| Power supply | Phase / Frequency / Voltage | | Hz / V | 1~ / 50 / 220-240 | | | | | 3N~ / 50 / 380-415 | |
| Current - 50Hz | Maximum fuse amps (MFA) | | A | 20 | 32 | | | | 20 | |

(1) EER/COP according to Eurovent 2012, for use outside EU only (2) The BYCQ140D7W1 has white insulation. Be informed that formation of dirt on white insulation is visibly stronger and that it is consequently not advised to install the BYCQ140D7W1 decoration panel in environments exposed to concentrations of dirt. (3) BYCQ140D7W1: pure white standard panel with grey louvers; BYCQ140D7W1W: pure white standard panel with white louvers; BYCQ140D7GW1: pure white auto cleaning panel.



FFQ-C (white panel)



FFQ-C (silver and white panel)



RXS-L



BRC1E52A/B
(optional)



BRC7F530W
(optional)




SEASONAL EFFICIENCY
Smart use of energy

- › **Unique design in the market: integrates fully flat into the ceiling** and fits flush into architectural ceiling modules
- › Remarkable blend of iconic design and engineering excellence with an elegant finish in white or a combination of silver and white
- › The **presence sensor** (optional) adjusts the set point with standard 1°C if no one is detected in the room, it is possible to adjust the set point with 2, 3 or 4°C (optional). It also automatically directs air flow away from any person to avoid draught.
- › The **floor sensor** (optional) detects the average floor temperature and ensures even temperature distribution between ceiling and floor. Cold feet will become history.
- › **Individual flap control:** possibility to adapt the room layout by fixing the position of each flap individually
- › Low energy consumption thanks to specially developed small tube heat exchanger, DC fan motor and drain pump
- › Fresh air intake for healthy living
- › **No optional adapter needed for DIII-connection**, link your unit into the wider building management system.



Heating & Cooling

| Indoor unit | | | FFQ25C | | FFQ35C | | FFQ50C | | FFQ60C | | | | |
|--|------------------------------|---------------------------|-----------------|--|-------------------|----------------------------------|-------------------|-------|-------------|-------|---------------|-------|--|
| Cooling capacity | Min./Nom./Max. | | kW | | 1.4/2.50/4.0 | | 1.4/3.4/4.0 | | 1.7/5.0/5.3 | | 1.7/5.7/6.5 | | |
| Heating capacity | Min./Nom./Max. | | kW | | 1.3/3.20/5.1 | | 1.3/4.20/5.1 | | 1.7/5.8/6.0 | | 1.7/7.0/8.0 | | |
| Power input | Cooling | Min./Nom./Max. | kW | | 0.360/0.560/1.470 | | 0.360/0.920/1.470 | | -1.560/- | | -1.890/- | | |
| | Heating | Min./Nom./Max. | kW | | 0.300/0.820/1.650 | | 0.300/1.200/1.650 | | -1.660/- | | -2.050/- | | |
| Seasonal efficiency (according to EN14825)  | Cooling | Energy label | | A++ | | | | A+ | | | | | |
| | | Pdesign | | kW | | 2.50 | | 3.40 | | 5.00 | | 5.70 | |
| | | SEER | | | | 6.11 | | 6.32 | | 5.93 | | 5.71 | |
| | | Annual energy consumption | | kWh | | 143 | | 188 | | 295 | | 349 | |
| | Heating (Average climate) | Energy label | | A+ | | | | A | | | | A+ | |
| | | Pdesign | | kW | | 2.31 | | 3.10 | | 3.84 | | 3.96 | |
| | | SCOP | | | | 4.24 | | 4.10 | | 3.90 | | 4.04 | |
| | | Annual energy consumption | | kWh | | 763 | | 1,059 | | 1,378 | | 1,373 | |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | | 4.46 | | 3.70 | | 3.21 | | 3.02 | | |
| | COP | | | | 3.90 | | 3.50 | | 3.49 | | 3.41 | | |
| | Annual energy consumption | | kWh | | 280 | | 460 | | 780 | | 945 | | |
| | Energy label | | Cooling/Heating | | A/A | | A/B | | | | B/B | | |
| Dimensions | Unit | HeightxWidthxDepth | | mm | | 260x575x575 | | | | | | | |
| Weight | Unit | | | kg | | 16 | | | | 17.5 | | | |
| Decoration panel | Model | | | BYFQ60CW/BYFQ60CS/BYFQ60B2 | | | | | | | | | |
| | Colour | | | White (N9.5)/White (N9.5) + Silver/White (RAL9010) | | | | | | | | | |
| | Dimensions | HeightxWidthxDepth | | mm | | 46x620x620/620x46x620/55x700x700 | | | | | | | |
| | Weight | | | kg | | 2.8/2.8/2.7 | | | | | | | |
| Fan - Air flow rate | Cooling | High/Nom./Low | m³/min | | 9/8/6.5 | | 10/8.5/6.5 | | 12/10/7.5 | | 14.5/12.5/9.5 | | |
| | Heating | High/Nom./Low | m³/min | | 9/8/6.5 | | 10/8.5/6.5 | | 12/10/7.5 | | 14.5/12.5/9.5 | | |
| Sound power level | Cooling | | dBA | | 48 | | 51 | | 56 | | 60 | | |
| Sound pressure level | Cooling | High/Nom./Low | dBA | | 31/28.5/25 | | 34/30.5/25 | | 39/34/27 | | 43/40/32 | | |
| | Heating | High/Nom./Low | dBA | | 31/28.5/25 | | 34/30.5/25 | | 39/34/27 | | 43/40/32 | | |
| Piping connections | Liquid | OD | | mm | | 6.35 | | | | | | | |
| | Gas | OD | | mm | | 9.5 | | | | 12.7 | | | |
| Power supply | Phase / Frequency / Voltage | | | Hz / V | | 1~ / 50 / 220-240 | | | | | | | |

| Outdoor unit | | | | | RXS25L | RXS35L | RXS50L | RXS60L |
|----------------------|-----------------------------|---------------------------|--------------|--------|-------------------|-----------|-----------------------|-----------|
| Dimensions | Unit | HeightxWidthxDepth | | mm | 550x765x285 | | 735x825x300 | |
| Weight | Unit | | | kg | 34 | | 47 | 48 |
| Fan - Air flow rate | Cooling | High/Super low | | m³/min | 33.5/30.1 | 36.0/30.1 | 50.9/48.9 | 50.2/45.0 |
| | Heating | High/Super low | | m³/min | 28.3/25.6 | | 45.0/43.1 | 46.3/46 |
| Sound power level | Cooling | | | dBA | 59 | 61 | 62 | |
| | Heating | | | dBA | 59 | 61 | 62 | |
| Sound pressure level | Cooling | High/Low/Silent operation | | dBA | 46/-/43 | 48/-/44 | 48/44/- | 49/46/- |
| | Heating | High/Low/Silent operation | | dBA | 47/-/44 | 48/-/45 | 48/45/- | 49/46/- |
| Operation range | Cooling | Ambient | Min.~Max. | °CDB | -10~46 | | | |
| | Heating | Ambient | Min.~Max. | °CWB | -15~18 | | | |
| Refrigerant | Type/GWP | | R-410A/1,975 | | | | | |
| Piping connections | Piping length | OU - IU | Max. | m | - | 20 | 30 | |
| | Level difference | IU - OU | Max. | m | - | 15 | 20.0 | |
| Power supply | Phase / Frequency / Voltage | | | Hz / V | 1~ / 50 / 220-240 | | 1~ / 50 / 220-230-240 | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | A | - | | | |

(1) EER/COP according to Eurovent 2012, for use outside EU only (2) Dimensions do not include control box

ACQ-C / AZQS-BV1/BY1 Siesta, 4-way blow ceiling mounted cassette



ACQ71C



AZQS71BV1



ARCWLA



- › Ideal solution for **shops**, restaurants or offices requiring maximum floor space for furniture, decorations and fittings
- › Air can be discharged in **any of 4 directions**
- › **Air filter** removes airborne dust particles to ensure a steady supply of clean air
- › Easy installation and maintenance
- › **Control several indoor units at the same time** via the Siesta Sky Air group control (optional)
- › Standard drain pump
- › Fresh air intake: up to 20 %



Heating & Cooling

| Indoor unit | | | ACQ71C | ACQ100C | ACQ125C | ACQ71C | ACQ100C | ACQ125C |
|---|------------------------------|--------------------------------|----------|---------------------|---------------------|---------------------|---------------------|---------------------|
| Cooling capacity | Min./Nom./Max. | kW | -/6.8/- | -/9.5/- | -/12.1/- | -/6.8/- | -/9.5/- | -/12.1/- |
| Heating capacity | Min./Nom./Max. | kW | -/7.50/- | -/10.80/- | -/13.5/- | -/7.50/- | -/10.8/- | -/13.5/- |
| Power input | Cooling | Nom. | 2.05 | 2.96 | 4.02 | 2.05 | 2.96 | 4.02 |
| | Heating | Nom. | 2.08 | 2.99 | 3.96 | 2.08 | 2.99 | 3.96 |
| Seasonal efficiency (according to EN14825) | Cooling | Energy label | B | | | B | | |
| | | Pdesign | 6.80 | 9.50 | - | 6.80 | 9.50 | - |
| | | SEER | 4.65 | | | 4.65 | | |
| | | Annual energy consumption | 512 | 716 | - | 512 | 716 | - |
| | Heating (Average climate) | Energy label | A | | | A | | |
| | | Pdesign | 6.33 | 7.60 | - | 6.33 | 7.60 | - |
| | | SCOP | 3.80 | | | 3.80 | | |
| | | Annual energy consumption | 2,332 | 2,800 | - | 2,332 | 2,800 | - |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | 3.31 | 3.21 | 3.01 | 3.31 | 3.21 | 3.01 |
| | COP | | 3.61 | | | 3.61 | | |
| | Annual energy consumption | | 1,025 | 1,480 | 2,010 | 1,025 | 1,480 | 2,010 |
| Energy label | Cooling/Heating | | B/A | A/A | B/B | B/A | A/A | B/B |
| | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDp | mm | 265x820x820 | 300x820x820 | 265x820x820 | 300x820x820 | |
| Weight | Unit | | kg | 31 | 39 | 31 | 39 | |
| Decoration panel | Colour | | White | | | | | |
| | Dimensions | | mm | 82x990x990 | | | | |
| | Weight | | kg | 4 | | | | |
| Fan - Air flow rate | Cooling | High/Nom./Low/Silent operation | m³/min | 24.4/20.5/17.6/15.0 | 29.2/24.4/21.0/17.6 | 34.0/29.2/26.3/22.1 | 24.4/20.5/17.6/15.0 | 29.2/24.4/21.0/17.6 |
| | Heating | High/Nom./Low/Silent operation | m³/min | 24.4/20.5/17.6/15.0 | 29.2/24.4/21.0/17.6 | 34.0/29.2/26.3/22.1 | 24.4/20.5/17.6/15.0 | 29.2/24.4/21.0/17.6 |
| Sound power level | Cooling | | dBA | 54 | 57 | 60 | 54 | 57 |
| | Heating | | dBA | 54 | 56 | 60 | 54 | 56 |
| Sound pressure level | Cooling | High/Nom./Low/Silent operation | dBA | 41/38/35/32 | 44/41/38/36 | 47/44/43/41 | 41/38/35/32 | 44/41/38/36 |
| | Heating | High/Nom./Low/Silent operation | dBA | 41/38/35/32 | 44/41/38/36 | 47/44/43/41 | 41/38/35/32 | 44/41/38/36 |
| Piping connections | Liquid | OD | mm | 9.52 | | | | |
| | Gas | OD | mm | 15.88 | | | | |
| Power supply | Phase / Frequency / Voltage | | Hz / V | 1 ~ / 50 / 220-240 | | | | |

| Outdoor unit | | | AZQS71BV1 | AZQS100BV1 | AZQS125BV1 | AZQS100BY1 | AZQS125BY1 |
|----------------------|-----------------------------|-----------------------|------------|--------------------|-------------|------------|---------------------|
| Dimensions | Unit | HeightxWidthxDp | mm | 770x900x320 | 990x940x320 | | |
| Weight | Unit | | kg | 67 | 81 | 82 | |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 52.0 | 76 | 77 | 77 |
| | Heating | Nom. | m³/min | 48.0 | | 83 | |
| Sound power level | Cooling | | dBA | 65 | 70 | 71 | 71 |
| Sound pressure level | Cooling | Nom./Silent operation | dBA | 48/43 | 53/- | 54/- | 54/- |
| | Heating | Nom. | dBA | 50 | 57 | 58 | 58 |
| | Night quiet mode | Level 1 | dBA | - | | 49 | |
| Operation range | Cooling | Ambient | Min.~Max. | °CDB | -5.0~46.0 | -5~46 | |
| | Heating | Ambient | Min.~Max. | °CWB | -15.0~15.5 | -15~15.5 | |
| Refrigerant | Type/GWP | | | R-410A/1,975 | | | |
| Piping connections | Piping length | OU - IU | Max. | m | 30 | 50 | |
| | | System | Equivalent | m | 40 | 70 | |
| | Level difference | IU - OU | Max. | m | 15.0 | 30.0 | |
| | | IU - IU | Max. | m | - | 0.5 | |
| Power supply | Phase / Frequency / Voltage | | Hz / V | 1 ~ / 50 / 220-240 | | | 3N ~ / 50 / 380-415 |
| Current - 50Hz | Maximum fuse amps (MFA) | | A | 20 | - | | |

(1) EER/COP according to Eurovent 2012, for use outside EU only



FBQ100-140C8



RZQG100-140L8/7V1/L(8)Y1



BRC1E52A/B
(optional)

BRC4C65
(optional)




SEASONAL EFFICIENCY
Smart use of energy

- › **Blends unobtrusively** with any interior décor: only the suction and discharge grilles are visible
- › Easy installation thanks to automatic air flow adjustment towards nominal air flow rate
- › Reduction in power consumption thanks to **DC inverter fans**
- › Possibility to change ESP via wired remote control allows **optimisation of the supply air volume**
- › Up to **120Pa external static pressure** facilitates using flexible ducts of varying lengths: ideal for shops and medium size offices
- › **Whisper quiet** operation: down to 29dBA sound pressure level
- › **No optional adapter needed for DIII-connection**, link your unit into the wider building management system.
- › The **air suction direction** can be altered from rear to bottom suction
- › **Standard built-in drain pump** increases reliability of the drain system

Heating & Cooling



| Indoor unit | | | | FBQ71C8 | FBQ100C8 | FBQ125C8 | FBQ140C8 | FBQ71C8 | FBQ100C8 | FBQ125C8 | FBQ140C8 |
|--|------------------------------|---------------------------|--------|--------------------------|------------------|-------------|----------|---------------|---------------|-------------|----------|
| Cooling capacity | Min./Nom./Max. | | kW | -/6.8/- | -/9.5/- | -/12.0/- | -/13.4/- | -/6.8/- | -/9.5/- | -/12.0/- | -/13.4/- |
| Heating capacity | Min./Nom./Max. | | kW | -/7.5/- | -/10.8/- | -/13.5/- | -/15.5/- | -/7.5/- | -/10.8/- | -/13.5/- | -/15.5/- |
| Power input | Cooling | Nom. | kW | 1.94 | 2.44 | 3.15 | 4.02 | 1.94 | 2.44 | 3.15 | 4.02 |
| | Heating | Nom. | kW | 2.05 | 2.57 | 3.53 | 4.30 | 2.05 | 2.57 | 3.53 | 4.30 |
| <div></div> Seasonal efficiency (according to EN14825) | Cooling | Energy label | | A++ | A+ | - | A++ | A+ | - | - | |
| | | Pdesign | kW | 6.80 | 9.50 | 12.00 | - | 6.80 | 9.50 | 12.00 | - |
| | | SEER | | 6.11 | 5.80 | 5.81 | - | 6.11 | 5.80 | 5.81 | - |
| | | Annual energy consumption | kWh | 389 | 573 | 722 | - | 389 | 573 | 722 | - |
| | Heating (Average climate) | Energy label | | A+ | A++ | A+ | - | A+ | A++ | A+ | - |
| | | Pdesign | kW | 6.00 | 11.30 | 12.71 | - | 6.00 | 11.30 | 12.71 | - |
| | | SCOP | | 4.01 | 4.61 | 4.21 | - | 4.01 | 4.61 | 4.21 | - |
| | | Annual energy consumption | kWh | 2,094 | 3,431 | 4,226 | - | 2,094 | 3,431 | 4,226 | - |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | 3.50 | 3.89 | 3.81 | 3.33 | 3.50 | 3.89 | 3.81 | 3.33 |
| | COP | | | 3.65 | 4.21 | 3.83 | 3.61 | 3.65 | 4.21 | 3.83 | 3.61 |
| | Annual energy consumption | kWh | | 970 | 1,220 | 1,575 | 2,010 | 970 | 1,220 | 1,575 | 2,010 |
| | Energy label | Cooling/Heating | | | A/A | | - | | A/A | | - |
| Casing | Colour | | | Not painted (galvanised) | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 300x1,000x700 | 300x1,400x700 | | | 300x1,000x700 | 300x1,400x700 | | |
| Required ceiling void > | | | | mm | 350 | | | | | | |
| Weight | Unit | | kg | 34 | 45 | | | 34 | 45 | | |
| Decoration panel | Model | | | | BYBS71DJW1 | BYBS125DJW1 | | | BYBS71DJW1 | BYBS125DJW1 | |
| | Colour | | | | White (10Y9/0.5) | | | | | | |
| | Dimensions | HeightxWidthxDepth | mm | 55x1,100x500 | 55x1,500x500 | | | 55x1,100x500 | 55x1,500x500 | | |
| | Weight | | kg | 4.5 | 6 | | | 4.5 | 6 | | |
| Fan - Air flow rate | Cooling | High/Low | m³/min | 18/15 | 32/23 | 39/28 | | 18/15 | 32/23 | 39/28 | |
| | Heating | High/Low | m³/min | 18/15 | 32/23 | 39/28 | 41/29 | 18/15 | 32/23 | 39/28 | 41/29 |
| Fan - External static pressure | High/Nom. | | Pa | 100/30 | 120/40 | 120/50 | | 100/30 | 120/40 | 120/50 | |
| Sound power level | Cooling | | dBA | 57 | 61 | 66 | | 57 | 61 | 66 | |
| Sound pressure level | Cooling | High/Low | dBA | 37/29 | 38/32 | 40/33 | | 37/29 | 38/32 | 40/33 | |
| | Heating | High/Low | dBA | 37/29 | 38/32 | 40/33 | 41/34 | 37/29 | 38/32 | 40/33 | 41/34 |
| Piping connections | Liquid | OD | mm | 9.52 | | | | | | | |
| | Gas | OD | mm | 15.9 | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | 1~ / 50/60 / 220-240/220 | | | | | | | |

| Outdoor unit | | | | RZQG71L8V1 | RZQG100L8V1 | RZQG125L8V1 | RZQG140L7V1 | RZQG71L8Y1 | RZQG100L8Y1 | RZQG125L8Y1 | RZQG140LY1 |
|----------------------|------------------|--------------------|----------------|-----------------------------|---------------|-------------------|---------------|------------|-------------|--------------------|------------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 990x940x320 | 1,430x940x320 | 990x940x320 | 1,430x940x320 | | | | |
| Weight | Unit | kg | | 78 | 102 | 80 | 101 | | | | |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 59 | 70 | 84 | 59 | 70 | 84 | | |
| | Heating | Nom. | m³/min | 49 | 62 | 59 | 49 | 62 | 59 | | |
| Sound power level | Cooling | Nom. | dBA | 64 | 66 | 67 | 69 | 64 | 66 | 67 | 69 |
| | Heating | Nom. | dBA | 48 | 50 | 51 | 52 | 48 | 50 | 51 | 52 |
| Sound pressure level | Cooling | Nom. | dBA | 50 | 52 | 53 | 50 | 52 | 53 | | |
| | Night quiet mode | Level 1 | dBA | 43 | 45 | 43 | 45 | | | | |
| Operation range | Cooling | Ambient | Min.-Max. °CDB | -15~50 | | | | | | | |
| | Heating | Ambient | Min.-Max. °CWB | -20~15.5 | | | | | | | |
| Refrigerant | | | | Type/GWP | R-410A/1,975 | | | | | | |
| Piping connections | Piping length | OU - IU | Max. m | 50 | 75 | 50 | 75 | | | | |
| | | System | Equivalent m | 70 | 90 | 70 | 90 | | | | |
| | Level difference | IU - OU | Max. m | 30.0 | | | | | | | |
| | | | | IU - IU | Max. m | 0.5 | | | | | |
| Power supply | | | | Phase / Frequency / Voltage | Hz / V | 1~ / 50 / 220-240 | | | | 3N~ / 50 / 380-415 | |
| Current - 50Hz | | | | Maximum fuse amps (MFA) | A | 20 | 32 | 16 | 20 | | |


(1) EER/COP according to Eurovent 2012, for use outside EU only

FBQ-C8 / RZQSG-L(8)Y1/L(3/8)V1



Heating & Cooling

Seasonal Classic

| Indoor unit | | | | FBQ71C8 | FBQ100C8 | FBQ125C8 | FBQ140C8 | FBQ100C8 | FBQ125C8 | FBQ140C8 | |
|---|---|---------------------------|--------|--------------------------|--------------------------|---------------|-------------|----------|----------|----------|------|
| Cooling capacity | Min./Nom./Max. | | kW | -/6.8/- | -/9.5/- | -/12.0/- | -/13.4/- | -/9.5/- | -/12.0/- | -/13.4/- | |
| Heating capacity | Min./Nom./Max. | | kW | -/7.5/- | -/10.8/- | -/13.5/- | -/15.5/- | -/10.8/- | -/13.5/- | -/15.5/- | |
| Power input | Cooling | Nom. | kW | 2.07 | 2.87 | 3.74 | 4.44 | 2.87 | 3.74 | 4.44 | |
| | Heating | Nom. | kW | 2.08 | 2.96 | 3.85 | 4.54 | 2.96 | 3.85 | 4.54 | |
|  Seasonal efficiency (according to EN14825) | Cooling | Energy label | | A+ | A | | - | A | | - | |
| | | Pdesign | kW | 6.80 | 9.50 | 12.00 | - | 9.50 | 12.00 | - | |
| | | SEER | | 5.81 | 5.50 | 5.20 | - | 5.50 | 5.20 | - | |
| | | Annual energy consumption | kWh | 410 | 604 | 807 | - | 604 | 807 | - | |
| | Heating (Average climate) | Energy label | | A | A+ | A | - | A+ | A | - | |
| | | Pdesign | kW | 6.00 | 7.60 | | - | 7.60 | | - | |
| | | SCOP | | 3.88 | 4.01 | 3.90 | - | 4.01 | 3.90 | - | |
| | | Annual energy consumption | kWh | 2,166 | 2,653 | 2,728 | - | 2,653 | 2,728 | - | |
| | Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | 3.28 | 3.31 | 3.21 | 3.02 | 3.31 | 3.21 | 3.02 |
| | | COP | | | 3.61 | 3.65 | 3.51 | 3.41 | 3.65 | 3.51 | 3.41 |
| Annual energy consumption | | kWh | | 1,035 | 1,435 | 1,870 | 2,220 | 1,435 | 1,870 | 2,220 | |
| Energy label | | Cooling/Heating | | A/A | | A/B | - | A/A | A/B | - | |
| Casing | Colour | | | | Not painted (galvanised) | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 300x1,000x700 | | 300x1,400x700 | | | | | |
| Required ceiling void > | | | | 350 | | | | | | | |
| Weight | Unit | | kg | 34 | | 45 | | | | | |
| Decoration panel | Model | | | | BYBS71DJW1 | | BYBS125DJW1 | | | | |
| | Colour | | | | White (10Y9/0.5) | | | | | | |
| | Dimensions | HeightxWidthxDepth | mm | 55x1,100x500 | | 55x1,500x500 | | | | | |
| | Weight | | | | 4.5 | | 6 | | | | |
| Fan - Air flow rate | Cooling | High/Low | m³/min | 18/15 | 32/23 | 39/28 | | 32/23 | 39/28 | | |
| | Heating | High/Low | m³/min | 18/15 | 32/23 | 39/28 | 41/29 | 32/23 | 39/28 | 41/29 | |
| Fan - External static pressure | High/Nom. | | Pa | 100/30 | 120/40 | 120/50 | | 120/40 | 120/50 | | |
| Sound power level | Cooling | | dBA | 57 | 61 | 66 | | 61 | 66 | | |
| Sound pressure level | Cooling | High/Low | dBA | 37/29 | 38/32 | 40/33 | | 38/32 | 40/33 | | |
| | Heating | High/Low | dBA | 37/29 | 38/32 | 40/33 | 41/34 | 38/32 | 40/33 | 41/34 | |
| Piping connections | Liquid | OD | mm | 9.52 | | | | | | | |
| | Gas | OD | mm | 15.9 | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | 1~ / 50/60 / 220-240/220 | | | | | | | |

| Outdoor unit | | | | | RZQSG71L3V1 | RZQSG100L8V1 | RZQSG125L8V1 | RZQSG140LV1 | RZQSG100L8Y1 | RZQSG125L8Y1 | RZQSG140LY1 |
|----------------------|-----------------------------|-----------------------|------------|-------------|-------------------|--------------|--------------|---------------|--------------------|--------------|---------------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 770x900x320 | 990x940x320 | | | 1,430x940x320 | 990x940x320 | | 1,430x940x320 |
| Weight | Unit | | kg | 67 | 81 | | | 102 | 82 | | 101 |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 52 | 76 | 77 | 83 | 76 | 77 | 83 | |
| | Heating | Nom. | m³/min | 48 | 83 | | | 62 | 83 | | 62 |
| Sound power level | Cooling | | dBA | 65 | 69 | 70 | 69 | | 70 | 69 | |
| Sound pressure level | Cooling | Nom./Silent operation | dBA | 49/47 | 53/49 | 54/49 | 53/49 | 53/- | 54/- | 53/- | |
| | Heating | Nom. | dBA | 51 | 57 | 58 | 54 | 57 | 58 | 54 | |
| | Night quiet mode | Level 1 | dBA | - | | | | | 49 | | |
| Operation range | Cooling | Ambient | Min.~Max. | -15~46 | | | | | | | |
| | Heating | Ambient | Min.~Max. | -15~-15.5 | | | | | | | |
| Refrigerant | Type/GWP | | | | R-410A/1,975 | | | | | | |
| Piping connections | Piping length | OU - IU | Max. | m | 50 | | | | | | |
| | | System | Equivalent | m | 40 | 70 | | | | | |
| | Level difference | IU - OU | Max. | m | 30 | | | | | | |
| | | IU - IU | Max. | m | 0.5 | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | Hz / V | 1~ / 50 / 220-240 | | | | 3N~ / 50 / 380-415 | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | A | 20 | 32 | | | 20 | | |

(1) EER/COP according to Eurovent 2012, for use outside EU only



FBQ60C8



RXS-L



BRC1E52A/B
(optional)

BRC7F530W
(optional)




SEASONAL EFFICIENCY
Smart use of energy

- › **Blends unobtrusively** with any interior décor: only the suction and discharge grilles are visible
- › Easy installation thanks to automatic air flow adjustment towards nominal air flow rate
- › Reduction in power consumption thanks to **DC inverter fans**
- › Possibility to change ESP via wired remote control allows **optimisation of the supply air volume**
- › Up to **120Pa external static pressure** facilitates using flexible ducts of varying lengths: ideal for shops and medium size offices
- › **Whisper quiet** operation: down to 29dBA sound pressure level
- › **No optional adapter needed for DIII-connection**, link your unit into the wider building management system.
- › The **air suction direction** can be altered from rear to bottom suction
- › **Standard built-in drain pump** increases reliability of the drain system



Heating & Cooling

| Indoor unit | | | | FBQ35C8 | | FBQ50C8 | | FBQ60C8 | | | |
|--|---|---------------------------|--------|--------------------------|-------|-------------|-------|---------------|-------|------|--|
| Cooling capacity | Min./Nom./Max. | | kW | 1.4/3.40/3.9 | | 1.7/5.0/5.3 | | 1.7/5.7/6.5 | | | |
| Heating capacity | Min./Nom./Max. | | kW | 1.3/4.00/5.0 | | 1.7/5.5/6.0 | | 1.7/7.0/8.0 | | | |
| Power input | Cooling | Min./Nom./Max. | kW | 0.490/1.060/1.490 | | -1.650/- | | -1.750/- | | | |
| | Heating | Min./Nom./Max. | kW | 0.270/1.110/1.760 | | -1.610/- | | -2.050/- | | | |
| Seasonal efficiency (according to EN14825)  | Cooling | Energy label | | | | A+ | | | | | |
| | | Pdesign | | kW | 3.50 | | 4.90 | | 5.70 | | |
| | | SEER | | | 5.97 | | 5.85 | | 5.72 | | |
| | | Annual energy consumption | | kWh | 205 | | 293 | | 349 | | |
| | Heating (Average climate) | Energy label | | | | A | | | | | |
| | | Pdesign | | kW | 2.90 | | 4.35 | | 4.60 | | |
| | | SCOP | | | 3.93 | | 3.85 | | 3.80 | | |
| | | Annual energy consumption | | kWh | 1,033 | | 1,584 | | 1,693 | | |
| | Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | | 3.21 | | 3.03 | | 3.26 | |
| | | COP | | | | 3.60 | | 3.42 | | 3.41 | |
| Annual energy consumption | | kWh | 530 | | 825 | | 875 | | | | |
| Energy label | | Cooling/Heating | A/A | | B/B | | A/B | | | | |
| Casing | Colour | | | Not painted (galvanised) | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 300x700x700 | | | | 300x1,000x700 | | | |
| Required ceiling void > | | | | mm | | | | | | | |
| Weight | Unit | | | kg | | | 25 | | 350 | | |
| Decoration panel | Model | | | BYBS45DJW1 | | | | BYBS71DJW1 | | | |
| | Colour | | | White (10Y9/0.5) | | | | | | | |
| | Dimensions | HeightxWidthxDepth | mm | 55x800x500 | | | | 55x1,100x500 | | | |
| | Weight | | | kg | | | | 3 | | 4.5 | |
| Fan - Air flow rate | Cooling | High/Low | m³/min | 16/11 | | | | 18/15 | | | |
| | Heating | High/Low | m³/min | 16/11 | | | | 18/15 | | | |
| Fan - External static pressure | High/Nom. | | Pa | 100/30 | | | | | | | |
| Sound power level | Cooling | | dBA | 63 | | | | 57 | | | |
| Sound pressure level | Cooling | High/Low | dBA | 37/29 | | | | | | | |
| | Heating | High/Low | dBA | 37/29 | | | | | | | |
| Piping connections | Liquid | OD | mm | 6.35 | | | | | | | |
| | Gas | OD | mm | 9.5 | | 12.7 | | | | | |
| Power supply | Phase / Frequency / Voltage | | | Hz / V | | | | | | | |
| | | | | 1~ / 50/60 / 220-240/220 | | | | | | | |

| Outdoor unit | | | | RXS35L | RXS50L | RXS60L |
|----------------------|-----------------------------|---------------------------|--------|-------------------|--------|-----------------------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 550x765x285 | | 735x825x300 |
| Weight | Unit | | kg | 34 | | 48 |
| Fan - Air flow rate | Cooling | High/Super low | m³/min | 36.0/30.1 | | 50.2/45.0 |
| | Heating | High/Super low | m³/min | 28.3/25.6 | | 46.3/46 |
| Sound power level | Cooling | | dBA | 61 | | 62 |
| | Heating | | dBA | 61 | | 62 |
| Sound pressure level | Cooling | High/Low/Silent operation | dBA | 48/-/44 | | 49/46/- |
| | Heating | High/Low/Silent operation | dBA | 48/-/45 | | 49/46/- |
| Operation range | Cooling | Ambient Min.~Max. | °CDB | -10~46 | | |
| | Heating | Ambient Min.~Max. | °CWB | -15~18 | | |
| Refrigerant | Type/GWP | | | R-410A/1,975 | | |
| Piping connections | Piping length | OU - IU | Max. m | 20 | | 30 |
| | Level difference | IU - OU | Max. m | 15 | | 20.0 |
| Power supply | Phase / Frequency / Voltage | | Hz / V | 1~ / 50 / 220-240 | | 1~ / 50 / 220-230-240 |
| Current - 50Hz | Maximum fuse amps (MFA) | | A | - | | |

(1) EER/COP according to Eurovent 2012, for use outside EU only



FDBQ25B



BRC1E52A/B
(optional)



SEASONAL EFFICIENCY
Smart use of energy

- › Designed for **hotel bedrooms**
- › **Blends unobtrusively** with any interior décor: only the suction and discharge grilles are visible
- › **Compact dimensions** (230mm high & 652mm deep), can easily be mounted in a ceiling void
- › **Whisper quiet** operation: down to 28dBA sound pressure level
- › The **air suction direction** can be altered from rear to bottom suction
- › For easy mounting, the **drain pan** can be located to the left or right of the unit



Heating & Cooling

| Indoor unit | | | | FDBQ25B |
|----------------------|-----------------------------|--------------------|--------|----------------|
| Cooling capacity | Nom. | | kW | - |
| Power input | Cooling | Nom. | kW | - |
| | Heating | Nom. | kW | - |
| Dimensions | Unit | HeightxWidthxDepth | mm | 230x652x502 |
| Weight | Unit | | kg | 17,0 |
| Fan - Air flow rate | Cooling | High/Low | m³/min | 6,50/5,20 |
| | Heating | High/Low | m³/min | 6,95/5,20 |
| Sound power level | Cooling | | dBA | 55 |
| | Heating | | dBA | 55 |
| Sound pressure level | Cooling | High/Low | dBA | 35,0/28,0 |
| | Heating | High/Low | dBA | 35,0/29,0 |
| Piping connections | Liquid | OD | mm | 6,35 |
| | Gas | OD | mm | 9,52 |
| | Drain | | | 27,2 |
| Power supply | Phase / Frequency / Voltage | | Hz / V | 1 ~ / 50 / 230 |

| Outdoor unit | | | | |
|----------------------|-----------------------------|--------------------|-----------|------|
| Dimensions | Unit | HeightxWidthxDepth | mm | |
| Weight | Unit | | kg | |
| Fan - Air flow rate | Cooling | High/Nom./Low | m³/min | |
| | Heating | High/Low | m³/min | |
| Sound power level | Cooling | | dBA | |
| | Heating | | dBA | |
| Sound pressure level | Cooling | Nom. | dBA | |
| | Heating | Nom. | dBA | |
| Operation range | Cooling | Ambient | Min.~Max. | °CDB |
| | Heating | Ambient | Min.~Max. | °CWB |
| Refrigerant | Type/GWP | | | |
| Piping connections | Piping length | OU - IU | Max. | m |
| | Level difference | IU - OU | Max. | m |
| | | IU - IU | Max. | m |
| Power supply | Phase / Frequency / Voltage | | Hz / V | |
| Current - 50Hz | Maximum fuse amps (MFA) | | A | |

only available in multi model application



FDQ125C



RZQG125L8V1/Y1



BRC1E52A/B
(optional)



SEASONAL EFFICIENCY
Smart use of energy

- › **Blends unobtrusively** with any interior décor: only the suction and discharge grilles are visible
- › Easy installation thanks to automatic air flow adjustment towards nominal air flow rate
- › Reduction in power consumption thanks to **DC inverter fans**
- › Improved comfort thanks to 3-step air flow control
- › Up to **200Pa external static pressure** allows extensive ductwork runs and flexible application: ideal for use in large areas
- › **Less duct calculations are needed**; moreover, the air flow can be adjusted during installation via the wired remote control (optional) instead of via channel adjustments
- › **No optional adapter needed for DIII-connection**, link your unit into the wider building management system.
- › The **air suction direction** can be altered from rear to bottom suction
- › **Standard drain pump** with 625mm lift



Heating & Cooling

| Indoor unit | | | | FDQ125C | FDQ125C | FDQ125C | FDQ125C |
|---|------------------------------|---------------------------|--------|--------------------------|---------|---------|---------|
| Cooling capacity | Min./Nom./Max. | | kW | | -12.0/- | | |
| Heating capacity | Min./Nom./Max. | | kW | | -13.5/- | | |
| Power input | Cooling | Nom. | kW | 3.20 | | | 3.74 |
| | Heating | Nom. | kW | 3.53 | | | 3.85 |
| Seasonal efficiency (according to EN14825) | Cooling | Energy label | | A+ | | | A |
| | | Pdesign | kW | | 12.00 | | |
| | | SEER | | 5.81 | | | 5.20 |
| | | Annual energy consumption | kWh | 722 | | | 807 |
| | Heating (Average climate) | Energy label | | A+ | | | A |
| | | Pdesign | kW | 12.71 | | | 7.60 |
| | | SCOP | | 4.21 | | | 3.90 |
| | | Annual energy consumption | kWh | 4,226 | | | 2,728 |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | 3.75 | | | 3.21 |
| | COP | | | 3.83 | | | 3.51 |
| | Annual energy consumption | kWh | | 1,600 | | | 1,870 |
| | Energy label | Cooling/Heating | | A/A | | | A/B |
| Casing | Colour | | | Not painted (galvanised) | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 300x1,400x700 | | | |
| Required ceiling void > | | | mm | 350 | | | |
| Weight | Unit | | kg | 45 | | | |
| Decoration panel | Model | | | BYBS125DJW1 | | | |
| | Colour | | | White (10Y9/0.5) | | | |
| | Dimensions | HeightxWidthxDepth | mm | 55x1,500x500 | | | |
| | Weight | | kg | 6.5 | | | |
| Fan - Air flow rate | Cooling | High/Low | m³/min | 39/28 | | | |
| | Heating | High/Low | m³/min | 39/28 | | | |
| Fan - External static pressure | High/Nom. | | Pa | 200/50 | | | |
| Sound power level | Cooling | | dBA | 66 | | | |
| Sound pressure level | Cooling | High/Low | dBA | 40/33 | | | |
| | Heating | High/Low | dBA | 40/33 | | | |
| Piping connections | Liquid | OD | mm | 9.52 | | | |
| | Gas | OD | mm | 15.9 | | | |
| Power supply | Phase / Frequency / Voltage | Hz / V | | 1~ / 50/60 / 220-240/220 | | | |

Seasonal Smart

Seasonal Classic

| Outdoor unit | | | | RZQG125L8V1 | RZQG125L8Y1 | RZQSG125L8V1 | RZQSG125L8Y1 |
|----------------------|-----------------------------|-----------------------|----------------|-------------------|--------------------|-------------------|--------------------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,430x940x320 | | | |
| Weight | Unit | | kg | 102 | 101 | 81 | 82 |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 70 | | 77 | |
| | Heating | Nom. | m³/min | 62 | | 83 | |
| Sound power level | Cooling | | dBA | 67 | | 70 | |
| Sound pressure level | Cooling | Nom./Silent operation | dBA | 51/- | | 54/49 | 54/- |
| | Heating | Nom. | dBA | 53 | | 58 | |
| | Night quiet mode | Level 1 | dBA | 45 | | - | 49 |
| Operation range | Cooling | Ambient | Min.~Max. °CDB | -15~50 | | -15~46 | |
| | Heating | Ambient | Min.~Max. °CWB | -20~15.5 | | -15~15.5 | |
| Refrigerant | Type/GWP | | | R-410A/1,975 | | | |
| Piping connections | Piping length | OU - IU | Max. m | 75 | | 50 | |
| | | System | Equivalent m | 90 | | 70 | |
| | Level difference | IU - OU | Max. m | | 30.0 | | |
| | | IU - IU | Max. m | | 0.5 | | |
| Power supply | Phase / Frequency / Voltage | Hz / V | | 1~ / 50 / 220-240 | 3N~ / 50 / 380-415 | 1~ / 50 / 220-240 | 3N~ / 50 / 380-415 |
| Current - 50Hz | Maximum fuse amps (MFA) | A | | 32 | 20 | 32 | 20 |



FDQ-B



RZQ-C



BRC1E52A/B
(optional)

- › **Blends unobtrusively** with any interior décor: only the suction and discharge grilles are visible
- › Up to **250Pa external static pressure** allows extensive ductwork runs and flexible application: ideal for use in large areas
- › Up to 26.4kW in heating mode



Heating & Cooling



| Indoor unit | | | | FDQ200B | FDQ250B |
|---|-----------------------------|--------------------|--------|---------------|----------|
| Cooling capacity | Min./Nom./Max. | | kW | -/20.0/- | -/24.1/- |
| Heating capacity | Min./Nom./Max. | | kW | -/23.0/- | -/26.4/- |
| Power input | Cooling | Nom. | kW | 6.23 | 8.58 |
| | Heating | Nom. | kW | 6.74 | 8.22 |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | 3.21 | 2.81 |
| | COP | | | 3.41 | 3.21 |
| Annual energy consumption | | | kWh | 3,115 | 4,290 |
| Energy label Cooling/Heating | | | | -/- | |
| Casing | Colour | | | Unpainted | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 450x1,400x900 | |
| | Required ceiling void > | | | 450 | |
| Weight | Unit | | kg | 89.0 | 94.0 |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 69.0 | 89.0 |
| | Heating | Nom. | m³/min | 69.0 | 89.0 |
| Fan - External static pressure | High/Nom./Low | | Pa | 250/250/250 | |
| Sound power level | Cooling | | dBA | 81 | 82 |
| Sound pressure level | Cooling | High | dBA | 45.0 | 47.0 |
| | Heating | Low | dBA | 45.0 | 47.0 |
| Piping connections | Liquid | OD | mm | 9.52 | 12.7 |
| | Gas | OD | mm | 22.2 | |
| Power supply | Phase / Frequency / Voltage | | | 1~ / 50 / 230 | |

| Outdoor unit | | | | RZQ200C | RZQ250C |
|--------------------------------|-----------------------------|--------------------|----------------|--------------------|---------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,680x930x765 | |
| Weight | Unit | | kg | 183 | 184 |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 171 | 171 |
| | Heating | Nom. | m³/min | 171 | 171 |
| Fan - External static pressure | Max. | | Pa | 78 | 78 |
| Sound power level | Cooling | | dBA | 78 | 78 |
| Sound pressure level | Heating | | dBA | 78 | 78 |
| Sound pressure level | Nom. | | dBA | 57 | 57 |
| Operation range | Cooling | Ambient | Min.~Max. °CDB | -5.0~46.0 | |
| | Heating | Ambient | Min.~Max. °CWB | -15.0~15.0 | |
| Refrigerant | Type/GWP | | | R-410A/1,975 | |
| Piping connections | Piping length | OU - IU | Max. m | 100 | |
| | Level difference | IU - OU | Max. m | - | |
| Power supply | Phase / Frequency / Voltage | | | 3N~ / 50 / 380-415 | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | 20 | |



ABQ71C



AZQS71BV1




ARCW8
(standard)



- › Ideal solution for **shops**, requiring maximum floor space for furniture, decorations and fittings
- › **Blends unobtrusively** with any interior décor: only the suction and discharge grilles are visible
- › Air filter removes airborne dust particles to ensure a steady supply of clean air
- › Easy installation and maintenance
- › **Double-protection drainage system:** primary and secondary drain pan



Heating & Cooling

| Indoor unit | | | ABQ71C | ABQ100C | ABQ125C | ABQ140C | ABQ125C | ABQ100C | ABQ140C | |
|--|------------------------------|---------------------------|--------|-------------------|---------|---------------|---------------|---------------|---------|---------------|
| Cooling capacity | Min./Nom./Max. | kW | 6.8 | 9.5 | 12.1 | 13.0 | 9.5 | 12.1 | 13.0 | |
| Heating capacity | Min./Nom./Max. | kW | 7.5 | 10.8 | 13.5 | 15.5 | 10.8 | 13.5 | 15.5 | |
| Power input | Cooling | Nom. | * | | | | | | | |
| | Heating | Nom. | * | | | | | | | |
| Seasonal efficiency (according to EN14825)  | Cooling | Energy label | B | | - | | B | - | | |
| | | Pdesign | kW | 6.8 | 9.5 | 12.1 | 13.0 | 9.5 | 12.1 | 13.0 |
| | | SEER | | 4.65 | | - | | 4.65 | - | |
| | | Annual energy consumption | kWh | 512 | 715 | - | | 624 | - | |
| | Heating (Average climate) | Energy label | A | | - | | A | - | | |
| | | Pdesign | kW | 7.5 | 10.8 | 13.5 | 15.5 | 10.8 | 13.5 | 15.5 |
| | | SCOP | | 3.80 | | - | | 3.80 | - | |
| | | Annual energy consumption | kWh | 2.082 | 2.498 | - | | 3.500 | - | |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | * | | | | | | | |
| | COP | | * | | | | | | | |
| | Annual energy consumption | | kWh | * | | | | | | |
| | Energy label | Cooling/Heating | * | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 285x1,007x600 | * | 378x1,388x541 | 378x1,588x541 | 378x1,388x541 | * | 378x1,588x541 |
| Weight | Unit | | kg | 35 | * | 50.0 | 56.0 | 50.0 | * | 56.0 |
| Fan - Air flow rate | Cooling | High/Nom./Low | m³/min | * | | -/-/- | | * | | -/-/- |
| | Heating | High/Nom./Low | m³/min | * | | -/-/- | | * | | -/-/- |
| Fan - External static pressure | Super high/High/Nom./Low | | Pa | * | | | | | | |
| Sound power level | Cooling | | dBA | * | | | | | | |
| | Heating | | dBA | * | | | | | | |
| Sound pressure level | Cooling | Super high/High/Nom./Low | dBA | * | | | | | | |
| | Heating | High/Nom./Low | dBA | * | | | | | | |
| Piping connections | Liquid | OD | mm | 9.52 | | | | | | |
| | Gas | OD | mm | 15.88 | | | | | | |
| Power supply | Phase / Frequency / Voltage | | Hz / V | 1~ / 50 / 220-240 | | | | | | |

| Outdoor unit | | | AZQS71BV1 | AZQS100BV1 | AZQS125BV1 | AZQS140BV1 | AZQS100BY1 | AZQS125BY1 | AZQS140BY1 |
|----------------------|-----------------------------|-----------------------|------------|-------------------|-------------|---------------|--------------------|---------------|---------------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 770x900x320 | 990x940x320 | 1,430x940x320 | 990x940x320 | 1,430x940x320 | 1,430x940x320 |
| Weight | Unit | | kg | 67 | 81 | 102 | 82 | 101 | 101 |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 52.0 | 76 | 77 | 83 | 76 | 77 |
| | Heating | Nom. | m³/min | 48.0 | 83 | 62 | 83 | 58 | 54 |
| Sound power level | Cooling | | dBA | 64 | 70 | 71 | 70 | 71 | 70 |
| Sound pressure level | Cooling | Nom./Silent operation | dBA | 48/43 | 53/- | 54/- | 53/- | 54/- | 53/- |
| | Heating | Nom. | dBA | 50 | 57 | 58 | 54 | 57 | 58 |
| | Night quiet mode | Level 1 | dBA | - | | | 49 | | |
| Operation range | Cooling | Ambient | Min.~Max. | -5~46 | | | | | |
| | Heating | Ambient | Min.~Max. | -15~15.5 | | | | | |
| Refrigerant | Type/GWP | | | R-410A/1,975 | | | | | |
| Piping connections | Piping length | OU - IU | Max. | 30 | | 50 | | | |
| | | System | Equivalent | 40 | | 70 | | | |
| | Level difference | IU - OU | Max. | 15.0 | | 30.0 | | | |
| | | IU - IU | Max. | - | | 0.5 | | | |
| Power supply | Phase / Frequency / Voltage | | Hz / V | 1~ / 50 / 220-240 | | | 3N~ / 50 / 380-415 | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | A | 20 | | - | | | |

(1) EER/COP according to Eurovent 2012, for use outside EU only

*Note: grey cells contain preliminary data





FAQ100C



RZQG100L8V1/Y1



BRC1E52A/B
(optional)

BRC7EB518
(optional)



SEASONAL EFFICIENCY
Smart use of energy

- › Ideal solution for shops, restaurants or offices with **no or narrow false ceilings**
- › Can be installed in both new and existing buildings
- › Flat, stylish front panel blends easily within any interior décor and is more easy to clean
- › **5 different discharge angles** can be programmed via the remote control
- › Maintenance operations can be performed from the front of the unit
- › **No optional adapter needed for DIII-connection**, link your unit into the wider building management system.

Heating & Cooling



| Indoor unit | | | | FAQ71C | FAQ100C | FAQ71C | FAQ100C |
|---|------------------------------|---------------------------|-----------------|--------------------------|---------------|---------------|---------------|
| Cooling capacity | Min./Nom./Max. | kW | | -/6.8/- | -/9.5/- | -/6.8/- | -/9.5/- |
| Heating capacity | Min./Nom./Max. | kW | | -/7.5/- | -/10.8/- | -/7.5/- | -/10.8/- |
| Power input | Cooling | Nom. | kW | 2.00 | 2.63 | 2.00 | 2.63 |
| | Heating | Nom. | kW | 2.03 | 3.00 | 2.03 | 3.00 |
| Seasonal efficiency (according to EN14825) | Cooling | Energy label | | A++ | | | |
| | | Pdesign | kW | 6.80 | 9.50 | 6.80 | 9.50 |
| | | SEER | | 6.51 | 6.11 | 6.51 | 6.11 |
| | | Annual energy consumption | kWh | 365 | 544 | 365 | 544 |
| | Heating (Average climate) | Energy label | | A+ | | | |
| | | Pdesign | kW | 6.33 | 10.20 | 6.33 | 10.20 |
| | | SCOP | | 4.02 | 4.01 | 4.02 | 4.01 |
| | | Annual energy consumption | kWh | 2,204 | 3,561 | 2,204 | 3,561 |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | 3.40 | 3.62 | 3.40 | 3.62 |
| | COP | | | 3.70 | 3.61 | 3.70 | 3.61 |
| | Annual energy consumption | | kWh | 1,000 | 1,315 | 1,000 | 1,315 |
| | Energy label | | Cooling/Heating | A/A | | | |
| Casing | Colour | | | Fresh White | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 290x1,050x238 | 340x1,200x240 | 290x1,050x238 | 340x1,200x240 |
| Weight | Unit | | kg | 13 | 17 | 13 | 17 |
| Fan - Air flow rate | Cooling | High/Nom./Low | m³/min | 18/16/14 | 26/23/19 | 18/16/14 | 26/23/19 |
| | Heating | High/Nom./Low | m³/min | 18/16/14 | 26/23/19 | 18/16/14 | 26/23/19 |
| Sound power level | Cooling | | dBA | 61 | 65 | 61 | 65 |
| | Heating | | dBA | 61 | 65 | 61 | 65 |
| Sound pressure level | Cooling | High/Nom./Low | dBA | 45/42/40 | 49/45/41 | 45/42/40 | 49/45/41 |
| | Heating | High/Nom./Low | dBA | 45/42/40 | 49/45/41 | 45/42/40 | 49/45/41 |
| Piping connections | Liquid | OD | mm | 9.52 | | | |
| | Gas | OD | mm | 15.9 | | | |
| Power supply | Phase / Frequency / Voltage | | Hz / V | 1~ / 50/60 / 220-240/220 | | | |

| Outdoor unit | | | | RZQG71L8V1 | RZQG100L8V1 | RZQG71L8Y1 | RZQG100L8Y1 |
|----------------------|-----------------------------|--------------------|----------------|-------------------|---------------|--------------------|---------------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 990x940x320 | 1,430x940x320 | 990x940x320 | 1,430x940x320 |
| Weight | Unit | | kg | 78 | 102 | 80 | 101 |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 59 | 70 | 59 | 70 |
| | Heating | Nom. | m³/min | 49 | 62 | 49 | 62 |
| Sound power level | Cooling | | dBA | 64 | 66 | 64 | 66 |
| Sound pressure level | Cooling | Nom. | dBA | 48 | 50 | 48 | 50 |
| | Heating | Nom. | dBA | 50 | 52 | 50 | 52 |
| | Night quiet mode | Level 1 | dBA | 43 | 45 | 43 | 45 |
| Operation range | Cooling | Ambient | Min.~Max. °CDB | -15~50 | | | |
| | Heating | Ambient | Min.~Max. °CWB | -20~15.5 | | | |
| Refrigerant | Type/GWP | | | R-410A/1,975 | | | |
| Piping connections | Piping length | OU - IU | Max. m | 50 | 75 | 50 | 75 |
| | | System | Equivalent m | 70 | 90 | 70 | 90 |
| | Level difference | IU - OU | Max. m | 30.0 | | | |
| | | IU - IU | Max. m | 0.5 | | | |
| Power supply | Phase / Frequency / Voltage | | Hz / V | 1~ / 50 / 220-240 | | 3N~ / 50 / 380-415 | |
| Current - 50Hz | Maximum fuse amps (MFA) | | A | 20 | 32 | 16 | 20 |

(1) EER/COP according to Eurovent 2012, for use outside EU only



Heating & Cooling

Seasonal Classic

| Indoor unit | | | | FAQ71C | FAQ100C | FAQ100C |
|---|------------------------------|---------------------------|-----------------|--------------------------|---------|---------------|
| Cooling capacity | Min./Nom./Max. | | kW | -/6.8/- | | -/9.5/- |
| Heating capacity | Min./Nom./Max. | | kW | -/7.5/- | | -/10.8/- |
| Power input | Cooling | Nom. | kW | 2.12 | | 3.16 |
| | Heating | Nom. | kW | 2.08 | | 3.17 |
| Seasonal efficiency (according to EN14825) | Cooling | Energy label | | A+ | | |
| | | Pdesign | kW | 6.80 | | 9.50 |
| | | SEER | | 6.05 | | 5.61 |
| | | Annual energy consumption | kWh | 393 | | 592 |
| | Heating (Average climate) | Energy label | | A | | A+ |
| | | Pdesign | kW | 6.00 | | 6.81 |
| | | SCOP | | 3.90 | | 4.01 |
| | | Annual energy consumption | kWh | 2,155 | | 2,377 |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | 3.21 | | 3.01 |
| | COP | | | 3.61 | | 3.41 |
| | Annual energy consumption | | kWh | 1,060 | | 1,580 |
| | Energy label | | Cooling/Heating | A/A | | B/B |
| Casing | Colour | | | Fresh White | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 290x1,050x238 | | 340x1,200x240 |
| Weight | Unit | | kg | 13 | | 17 |
| Fan - Air flow rate | Cooling | High/Nom./Low | m³/min | 18/16/14 | | 26/23/19 |
| | Heating | High/Nom./Low | m³/min | 18/16/14 | | 26/23/19 |
| Sound power level | Cooling | | dBA | 61 | | 65 |
| | Heating | | dBA | 61 | | 65 |
| Sound pressure level | Cooling | High/Nom./Low | dBA | 45/42/40 | | 49/45/41 |
| | Heating | High/Nom./Low | dBA | 45/42/40 | | 49/45/41 |
| Piping connections | Liquid | OD | mm | | 9.52 | |
| | Gas | OD | mm | | 15.9 | |
| Power supply | Phase / Frequency / Voltage | | | 1~ / 50/60 / 220-240/220 | | |

| Outdoor unit | | | | RZQSG71L3V1 | RZQSG100L8V1 | RZQSG100L8Y1 |
|----------------------|-----------------------------|-----------------------|----------------|-------------------|--------------|--------------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 770x900x320 | | 990x940x320 |
| Weight | Unit | | kg | 67 | 81 | 82 |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 52 | | 76 |
| | Heating | Nom. | m³/min | 48 | | 83 |
| Sound power level | Cooling | | dBA | 65 | | 69 |
| Sound pressure level | Cooling | Nom./Silent operation | dBA | 49/47 | 53/49 | 53/- |
| | Heating | Nom. | dBA | 51 | | 57 |
| | Night quiet mode | Level 1 | dBA | | | 49 |
| Operation range | Cooling | Ambient | Min.-Max. °CDB | -15~-46 | | |
| | Heating | Ambient | Min.-Max. °CWB | -15~-15.5 | | |
| Refrigerant | Type/GWP | | | R-410A/1,975 | | |
| Piping connections | Piping length | OU - IU | Max. m | 50 | | |
| | System | Equivalent | m | 40 | 70 | |
| | Level difference | IU - OU | Max. m | 30 | | |
| Power supply | IU - IU | | | 0.5 | | |
| | Phase / Frequency / Voltage | | | 1~ / 50 / 220-240 | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | 20 | 32 | 20 |

(1) EER/COP according to Eurovent 2012, for use outside EU only



FHQ100-140C



RZQG100-140L8/7V1/L(8)Y1



BRC1E52A/B
(optional)




BRC7GA53
(optional)



SEASONAL EFFICIENCY
Smart use of energy


- › Ideal solution for commercial spaces with **narrow or no false ceilings**
- › The unit can easily be mounted in corners and narrow spaces, as it only needs **30mm lateral service space**
- › **Low energy consumption** thanks to DC fan motor and drain pump
- › Stylish unit blends easily with any interior, as the **flaps close entirely when not in operation**
- › Can be installed in both new and existing buildings
- › **Wider air discharge** thanks to Coanda effect: up to 100°



- › Air flow distribution for ceiling heights up to 3.8m without capacity loss
- › **No optional adapter needed for DIII-connection**, link your unit into the wider building management system.

Heating & Cooling



| Indoor unit | | | | FHQ71C | FHQ100C | FHQ125C | FHQ140C | FHQ71C | FHQ100C | FHQ125C | FHQ140C | |
|--|------------------------------|---------------------------|--------|--------------------------|----------|---------------|----------|---------------|----------|---------------|----------|---|
| Cooling capacity | Min./Nom./Max. | | kW | -/6.8/- | -/9.5/- | -/12.0/- | -/13.4/- | -/6.8/- | -/9.5/- | -/12.0/- | -/13.4/- | |
| Heating capacity | Min./Nom./Max. | | kW | -/7.5/- | -/10.8/- | -/13.5/- | -/15.5/- | -/7.5/- | -/10.8/- | -/13.5/- | -/15.5/- | |
| Power input | Cooling | Nom. | kW | 1.78 | 2.49 | 3.58 | 4.05 | 1.78 | 2.49 | 3.58 | 4.05 | |
| | Heating | Nom. | kW | 1.82 | 2.60 | 3.48 | 4.27 | 1.82 | 2.60 | 3.48 | 4.27 | |
| <div></div> Seasonal efficiency (according to EN14825) | Cooling | Energy label | | A++ | | A+ | - | A++ | | A+ | - | |
| | | Pdesign | | kW | 6.80 | 9.50 | 12.00 | - | 6.80 | 9.50 | 12.00 | - |
| | | SEER | | | 6.95 | 6.11 | 6.01 | - | 6.95 | 6.11 | 6.01 | - |
| | | Annual energy consumption | | kWh | 342 | 544 | 698 | - | 342 | 544 | 698 | - |
| | Heating (Average climate) | Energy label | | A+ | | A++ | A+ | - | A+ | A++ | A+ | - |
| | | Pdesign | | kW | 7.60 | 11.30 | 14.13 | - | 7.60 | 11.30 | 14.13 | - |
| | | SCOP | | | 4.32 | 4.61 | 4.23 | - | 4.32 | 4.61 | 4.23 | - |
| | | Annual energy consumption | | kWh | 2,462 | 3,431 | 4,676 | - | 2,462 | 3,431 | 4,676 | - |
| Nominal efficiency cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | 3.82 | 3.81 | 3.35 | 3.31 | 3.82 | 3.81 | 3.35 | 3.31 | |
| | COP | | | 4.13 | 4.15 | 3.89 | 3.63 | 4.13 | 4.15 | 3.89 | 3.63 | |
| | Annual energy consumption | | kWh | 890 | 1,245 | 1,790 | 2,025 | 890 | 1,245 | 1,790 | 2,025 | |
| | Energy label | Cooling/Heating | | A/A | | | | - | A/A | | - | |
| Casing | Colour | | | Fresh White | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 235x1,270x690 | | 235x1,590x690 | | 235x1,270x690 | | 235x1,590x690 | | |
| Weight | Unit | | kg | 32 | | 38 | | 32 | | 38 | | |
| Fan - Air flow rate | Cooling | High/Nom./Low | m³/min | 20.5/17/14 | 28/24/20 | 31/27/23 | 34/29/24 | 20.5/17/14 | 28/24/20 | 31/27/23 | 34/29/24 | |
| | Heating | High/Nom./Low | m³/min | 20.5/17/14 | 28/24/20 | 31/27/23 | 34/29/24 | 20.5/17/14 | 28/24/20 | 31/27/23 | 34/29/24 | |
| Sound power level | Cooling | | dBA | 55 | 60 | 62 | 64 | 55 | 60 | 62 | 64 | |
| | Heating | | dBA | 55 | 60 | 62 | 64 | 55 | 60 | 62 | 64 | |
| Sound pressure level | Cooling | High/Nom./Low | dBA | 38/36/34 | 42/38/34 | 44/41/37 | 46/42/38 | 38/36/34 | 42/38/34 | 44/41/37 | 46/42/38 | |
| | Heating | High/Nom./Low | dBA | 38/36/34 | 42/38/34 | 44/41/37 | 46/42/38 | 38/36/34 | 42/38/34 | 44/41/37 | 46/42/38 | |
| Piping connections | Liquid | OD | mm | 9.52 | | | | | | | | |
| | Gas | OD | mm | 15.9 | | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | 1~ / 50/60 / 220-240/220 | | | | | | | | |


| Outdoor unit | | | | | RZQG71L8V1 | RZQG100L8V1 | RZQG125L8V1 | RZQG140L7V1 | RZQG71L8Y1 | RZQG100L8Y1 | RZQG125L8Y1 | RZQG140LY1 | | | | | | | | |
|----------------------|-----------------------------|--------------------|------------|------|--------------|-------------|-------------------|-------------|------------|--------------------|-------------|---------------|----|----|----|----|----|--|----|--|
| Dimensions | Unit | HeightxWidthxDepth | mm | | 990x940x320 | | 1,430x940x320 | | | 990x940x320 | | 1,430x940x320 | | | | | | | | |
| Weight | Unit | | kg | | 78 | | 102 | | | 80 | | 101 | | | | | | | | |
| Fan - Air flow rate | Cooling | Nom. | m³/min | | 59 | | 70 | | 84 | | 59 | | 70 | | 84 | | | | | |
| | Heating | Nom. | m³/min | | 49 | | 62 | | | 49 | | 62 | | | | | | | | |
| Sound power level | Cooling | | dBA | | 64 | | 66 | | 67 | | 69 | | 64 | | 66 | | 67 | | 69 | |
| Sound pressure level | Cooling | Nom. | dBA | | 48 | | 50 | | 51 | | 52 | | 48 | | 50 | | 51 | | 52 | |
| | Heating | Nom. | dBA | | 50 | | 52 | | 53 | | | 50 | | 52 | | 53 | | | | |
| | Night quiet mode | Level 1 | dBA | | 43 | | 45 | | | 43 | | 45 | | | | | | | | |
| Operation range | Cooling | Ambient | Min.~Max. | °CDB | -15~50 | | | | | | | | | | | | | | | |
| | Heating | Ambient | Min.~Max. | °CWB | -20~15.5 | | | | | | | | | | | | | | | |
| Refrigerant | Type/GWP | | | | R-410A/1,975 | | | | | | | | | | | | | | | |
| Piping connections | Piping length | OU - IU | Max. | m | 50 | | 75 | | | 50 | | 75 | | | | | | | | |
| | | System | Equivalent | m | 70 | | 90 | | | 70 | | 90 | | | | | | | | |
| | Level difference | IU - OU | Max. | m | 30.0 | | | | | | | | | | | | | | | |
| | | IU - IU | Max. | m | 0.5 | | | | | | | | | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | | Hz / V | | 1~ / 50 / 220-240 | | | 3N~ / 50 / 380-415 | | | | | | | | | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | | A | 20 | | 32 | | | 16 | | 20 | | | | | | | |

(1) EER/COP according to Eurovent 2012, for use outside EU only



Heating & Cooling

Seasonal Classic

| Indoor unit | | | | FHQ71C | | FHQ100C | | FHQ125C | | FHQ140C | | FHQ100C | | FHQ125C | | FHQ140C | | | |
|--|------------------------------|---------------------------|--------|---------------|-------|---------------------------|-------|----------|-------|----------|------|----------|-------|----------|-------|----------|------|---|--|
| Cooling capacity | Min./Nom./Max. | | kW | -/6.8/- | | -/9.5/- | | -/12.0/- | | -/13.4/- | | -/9.5/- | | -/12.0/- | | -/13.4/- | | | |
| Heating capacity | Min./Nom./Max. | | kW | -/7.5/- | | -/10.8/- | | -/13.5/- | | -/15.5/- | | -/10.8/- | | -/13.5/- | | -/15.5/- | | | |
| Power input | Cooling | Nom. | kW | 1.97 | | 2.96 | | 4.15 | | 4.45 | | 2.96 | | 4.15 | | 4.45 | | | |
| | Heating | Nom. | kW | 1.88 | | 2.99 | | 3.73 | | 4.54 | | 2.99 | | 3.73 | | 4.54 | | | |
| <div></div> Seasonal efficiency (according to EN14825) | Cooling | Energy label | | | | A+ | | | | - | | A+ | | | | - | | | |
| | | Pdesign | | kW | 6.80 | | 9.50 | | 12.00 | | - | | 9.50 | | 12.00 | | - | | |
| | | SEER | | | | 5.61 | | | | - | | 5.61 | | | | - | | | |
| | | Annual energy consumption | | kWh | 424 | | 592 | | 748 | | - | | 592 | | 748 | | - | | |
| | Heating (Average climate) | Energy label | | | | A | | A+ | | | | A | | A+ | | | | | |
| | | Pdesign | | kW | | | 7.60 | | | | - | | 7.60 | | | | - | | |
| | | SCOP | | | | 3.90 | | 3.91 | | 4.01 | | - | | 3.91 | | 4.01 | | - | |
| | | Annual energy consumption | | kWh | 2,727 | | 2,721 | | 2,653 | | - | | 2,721 | | 2,653 | | - | | |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | | 3.46 | | 3.21 | | 2.89 | | 3.01 | | 3.21 | | 2.89 | | 3.01 | | |
| | COP | | | | 4.00 | | 3.61 | | 3.62 | | 3.41 | | 3.61 | | 3.62 | | 3.41 | | |
| | Annual energy consumption | | kWh | 985 | | 1,480 | | 2,075 | | 2,225 | | 1,480 | | 2,075 | | 2,225 | | | |
| | Energy label | Cooling/Heating | | | | A/A | | C/A | | - | | A/A | | C/A | | - | | | |
| Casing | Colour | | | Fresh White | | | | | | | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 235x1,270x690 | | 235x1,590x690 | | | | | | | | | | | | | |
| Weight | Unit | | | kg | | 38 | | | | | | | | | | | | | |
| Fan - Air flow rate | Cooling | High/Nom./Low | m³/min | 20.5/17/14 | | 28/24/20 | | 31/27/23 | | 34/29/24 | | 28/24/20 | | 31/27/23 | | 34/29/24 | | | |
| | Heating | High/Nom./Low | m³/min | 20.5/17/14 | | 28/24/20 | | 31/27/23 | | 34/29/24 | | 28/24/20 | | 31/27/23 | | 34/29/24 | | | |
| Sound power level | Cooling | | | dBA | | 55 | | 60 | | 62 | | 64 | | 60 | | 62 | | | |
| | Heating | | | dBA | | 55 | | 60 | | 62 | | 64 | | 60 | | 62 | | | |
| Sound pressure level | Cooling | High/Nom./Low | dBA | 38/36/34 | | 42/38/34 | | 44/41/37 | | 46/42/38 | | 42/38/34 | | 44/41/37 | | 46/42/38 | | | |
| | Heating | High/Nom./Low | dBA | 38/36/34 | | 42/38/34 | | 44/41/37 | | 46/42/38 | | 42/38/34 | | 44/41/37 | | 46/42/38 | | | |
| Piping connections | Liquid | OD | mm | 9.52 | | | | | | | | | | | | | | | |
| | Gas | OD | mm | 15.9 | | | | | | | | | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | Hz / V | | 1 ~ / 50/60 / 220-240/220 | | | | | | | | | | | | | |

| Outdoor unit | | | | RZQSG71L3V1 | RZQSG100L8V1 | RZQSG125L8V1 | RZQSG140LV1 | RZQSG100L8Y1 | RZQSG125L8Y1 | RZQSG140LY1 |
|----------------------|-----------------------------|-----------------------|------------|--------------------------|--------------|--------------|-------------|--------------|---------------|-------------|
| Dimensions | Unit | HeightxWidthxDepth | | mm | 770x900x320 | | 990x940x320 | | 1,430x940x320 | |
| Weight | Unit | | | kg | 67 | | 81 | | 102 | |
| Fan - Air flow rate | Cooling | Nom. | | m³/min | 52 | | 76 | | 77 | |
| | Heating | Nom. | | m³/min | 48 | | 83 | | 62 | |
| Sound power level | Cooling | | | dBA | 65 | | 69 | | 70 | |
| Sound pressure level | Cooling | Nom./Silent operation | | dBA | 49/47 | | 53/49 | | 54/49 | |
| | Heating | Nom. | | dBA | 51 | | 57 | | 58 | |
| | Night quiet mode | Level 1 | | dBA | - | | | | 49 | |
| Operation range | Cooling | Ambient | Min.~Max. | °CDB -15~46 | | | | | | |
| | Heating | Ambient | Min.~Max. | °CWB -15~-15.5 | | | | | | |
| Refrigerant | Type/GWP | | | R-410A/1,975 | | | | | | |
| Piping connections | Piping length | OU - IU | Max. | m 50 | | | | | | |
| | | System | Equivalent | m 40 | | | | | | |
| | Level difference | IU - OU | Max. | m 30 | | | | | | |
| | | IU - IU | Max. | m 0.5 | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | Hz / V 1~ / 50 / 220-240 | | | | | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | A 20 32 20 | | | | | | |

(1) EER/COP according to Eurovent 2012, for use outside EU only



FHQ60C



RXS-L




BRC1E52A/B
(optional)

BRC7F530W
(optional)




SEASONAL EFFICIENCY
Smart use of energy

- › Ideal solution for commercial spaces with **narrow or no false ceilings**
- › The unit can easily be mounted in corners and narrow spaces, as it only needs **30mm lateral service space**
- › **Low energy consumption** thanks to DC fan motor and drain pump
- › Stylish unit blends easily with any interior, as the **flaps close entirely when not in operation**
- › Can be installed in both new and existing buildings
- › **Wider air discharge** thanks to Coanda effect: up to 100°



- › Air flow distribution for ceiling heights up to 3.8m without capacity loss
- › **No optional adapter needed for DIII-connection**, link your unit into the wider building management system.

Heating & Cooling

| Indoor unit | | | | FHQ35C | | FHQ50C | | FHQ60C | | | |
|--|------------------------------|---------------------------|--------|--------------------------|------|-------------|-------|---------------|-------|--|--|
| Cooling capacity | Min./Nom./Max. | | kW | 1.4/3.40/4.0 | | 1.7/5.0/5.3 | | 1.7/5.7/5.7 | | | |
| Heating capacity | Min./Nom./Max. | | kW | 1.3/4.00/5.1 | | 1.7/6.0/6.0 | | 1.7/7.20/7.2 | | | |
| Power input | Cooling | Min./Nom./Max. | kW | 0.410/0.950/1.490 | | -1.570/- | | -1.750/- | | | |
| | Heating | Min./Nom./Max. | kW | 0.270/0.980/1.980 | | -1.790/- | | -2.170/- | | | |
| <div>Seasonal efficiency (according to EN14825)</div> <div></div> | Cooling | Energy label | | A++ | | A+ | | | | | |
| | | Pdesign | | kW | 3.40 | | 5.00 | | 5.70 | | |
| | | SEER | | | 6.18 | | 5.87 | | 6.02 | | |
| | | Annual energy consumption | | kWh | 193 | | 298 | | 332 | | |
| | Heating (Average climate) | Energy label | | A+ | | A | | | | | |
| | | Pdesign | | kW | 3.10 | | 4.35 | | 4.71 | | |
| | | SCOP | | | 4.43 | | 3.86 | | 3.87 | | |
| | | Annual energy consumption | | kWh | 981 | | 1,578 | | 1,705 | | |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | 3.58 | | 3.18 | | 3.26 | | | |
| | COP | | | 4.08 | | 3.35 | | 3.32 | | | |
| | Annual energy consumption | | kWh | 475 | | 785 | | 875 | | | |
| | Energy label | Cooling/Heating | | A/A | | B/C | | A/C | | | |
| Casing | Colour | | | Fresh White | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 235x960x690 | | | | 235x1,270x690 | | | |
| Weight | Unit | | kg | 24 | | 25 | | 31 | | | |
| Fan - Air flow rate | Cooling | High/Nom./Low | m³/min | 14/11.5/10 | | 15/12/10 | | 19.5/15/11.5 | | | |
| | Heating | High/Nom./Low | m³/min | 14/11.5/10 | | 15/12/10 | | 19.5/15/11.5 | | | |
| Sound power level | Cooling | | dBA | 53 | | | | 54 | | | |
| | Heating | | dBA | 53 | | | | 54 | | | |
| Sound pressure level | Cooling | High/Nom./Low | dBA | 36/34/31 | | 37/35/32 | | 37/35/33 | | | |
| | Heating | High/Nom./Low | dBA | 36/34/31 | | 37/35/32 | | 37/35/33 | | | |
| Piping connections | Liquid | OD | mm | 6.35 | | | | | | | |
| | Gas | OD | mm | 9.5 | | | | 12.7 | | | |
| | Drain | OD | mm | VP20 | | | | - | | | |
| Power supply | Phase / Frequency / Voltage | | Hz / V | 1~ / 50/60 / 220-240/220 | | | | | | | |

| Outdoor unit | | | | RXS35L | | RXS50L | | RXS60L | |
|----------------------|-----------------------------|---------------------------|------|--------|-------------------|--------|-----------------------|--------|-----------|
| Dimensions | Unit | HeightxWidthxDepth | | mm | 550x765x285 | | 735x825x300 | | |
| Weight | Unit | | | kg | 34 | | 47 | | 48 |
| Fan - Air flow rate | Cooling | High/Super low | | m³/min | 36.0/30.1 | | 50.9/48.9 | | 50.2/45.0 |
| | Heating | High/Super low | | m³/min | 28.3/25.6 | | 45.0/43.1 | | 46.3/46 |
| Sound power level | Cooling | | | dBA | 61 | | 62 | | |
| | Heating | | | dBA | 61 | | 62 | | |
| Sound pressure level | Cooling | High/Low/Silent operation | | dBA | 48/-/44 | | 48/44/- | | 49/46/- |
| | Heating | High/Low/Silent operation | | dBA | 48/-/45 | | 48/45/- | | 49/46/- |
| Operation range | Cooling | Ambient Min.~Max. | | °CDB | -10~46 | | -10~46 | | |
| | Heating | Ambient Min.~Max. | | °CWB | -15~18 | | -15~18 | | |
| Refrigerant | Type/GWP | | | | R-410A/1,975 | | | | |
| Piping connections | Piping length | OU - IU | Max. | m | 20 | | 30 | | |
| | Level difference | IU - OU | Max. | m | 15 | | 20.0 | | |
| Power supply | Phase / Frequency / Voltage | | | Hz / V | 1~ / 50 / 220-240 | | 1~ / 50 / 220-230-240 | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | A | - | | - | | |

(1) EER/COP according to Eurovent 2012, for use outside EU only



AHQ125CV1



AZQS140BV1/BY1




ARCWLA



- › Ideal solution for **commercial spaces** with no or narrow false ceilings
- › Can be installed in both new and existing buildings
- › **Air filter** removes airborne dust particles to ensure a steady supply of clean air
- › **Decrease of temperature variation** by automatic fan speed selection or freely selectable **3-step fan speed**.
- › Easy installation and maintenance



Heating & Cooling

| Indoor unit | | | | AHQ71C | AHQ100C | AHQ125C | AHQ140C | AHQ100C | AHQ125C | AHQ140C | | |
|--|------------------------------|---------------------------|--------|--------------------|----------------|----------------|----------------|----------------|----------------|----------------|---|--|
| Cooling capacity | Min./Nom./Max. | | kW | -/6.8/- | -/9.5/- | -/12.1/- | -/13.0/- | -/9.5/- | -/12.1/- | -/13.0/- | | |
| Heating capacity | Min./Nom./Max. | | kW | -/7.5/- | -/10.8/- | -/13.5/- | -/15.5/- | -/10.8/- | -/13.5/- | -/15.5/- | | |
| Power input | Cooling | Nom. | kW | 2.24 | 3.62 | 4.60 | 4.32 | 3.62 | 4.60 | 4.32 | | |
| | Heating | Nom. | kW | 2.46 | 3.17 | 3.74 | 4.55 | 3.17 | 3.74 | 4.55 | | |
| Seasonal efficiency (according to EN14825)  | Cooling | Energy label | | B | | - | | B | | - | | |
| | | Pdesign | | kW | 6.80 | 9.50 | - | | 9.50 | | - | |
| | | SEER | | | 4.65 | 4.60 | - | | 4.60 | | - | |
| | | Annual energy consumption | | kWh | 511 | 723 | - | | 723 | | - | |
| | Heating (Average climate) | Energy label | | A | | - | | A | | - | | |
| | | Pdesign | | kW | 6.33 | 7.60 | - | | 7.60 | | - | |
| | | SCOP | | | 3.80 | | - | | 3.80 | | - | |
| | | Annual energy consumption | | kWh | 2,332 | 2,800 | - | | 2,800 | | - | |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | 3.03 | 2.62 | 2.63 | 3.01 | 2.62 | 2.63 | 3.01 | | |
| | COP | | | 3.05 | 3.41 | 3.61 | 3.41 | | 3.61 | 3.41 | | |
| | Annual energy consumption | | kWh | 1,120 | 1,810 | 2,300 | 2,159 | 1,810 | 2,300 | 2,159 | | |
| | Energy label | Cooling/Heating | | B/D | D/B | D/A | B/B | D/B | D/A | B/B | | |
| Casing | Colour | | | White | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 260x1,320x634 | 260x1,538x634 | 260x1,786x634 | 285x1,902x680 | 260x1,538x634 | 260x1,786x634 | 285x1,902x680 | | |
| Weight | Unit | | kg | 38 | 45 | 54 | 70 | 45 | 54 | 70 | | |
| Fan - Air flow rate | Cooling | High/Nom./Low | m³/min | 23.8/21.3/18.9 | 31.1/27.8/24.8 | 34.4/30.6/27.2 | 43.9/39.1/28.3 | 31.1/27.8/24.8 | 34.4/30.6/27.2 | 43.9/39.1/28.3 | | |
| | Heating | High/Nom./Low | m³/min | 23.8/21.3/18.9 | 31.1/27.8/24.8 | 34.4/30.6/27.2 | 43.9/39.1/28.3 | 31.1/27.8/24.8 | 34.4/30.6/27.2 | 43.9/39.1/28.3 | | |
| Fan - External static pressure | High/Nom./Low | | Pa | 0/0/0 | | | | | | | | |
| Sound power level | Cooling | | dBA | 59 | 64 | 69 | 70 | 64 | 69 | 70 | | |
| | Heating | | dBA | 62 | 64 | 69 | 70 | 64 | 69 | 70 | | |
| Sound pressure level | Cooling | High/Nom./Low | dBA | 49/48/46 | 52/47/46 | 52/50/49 | 56/53/46 | 52/47/46 | 52/50/49 | 56/53/46 | | |
| | Heating | High/Nom./Low | dBA | 49/48/46 | 52/47/46 | 52/50/49 | 56/53/46 | 52/47/46 | 52/50/49 | 56/53/46 | | |
| Piping connections | Liquid | OD | mm | 9.52 | | | | | | | | |
| | Gas | OD | mm | 15.88 | | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | 1 ~ / 50 / 220-240 | | | | | | | | |

| Outdoor unit | | | | | AZQS71BV1 | AZQS100BV1 | AZQS125BV1 | AZQS140BV1 | AZQS100BY1 | AZQS125BY1 | AZQS140BY1 |
|----------------------|-----------------------------|-----------------------|----------------|--------------|-------------------|------------|--------------------|-------------|------------|---------------|------------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 770x900x320 | 990x940x320 | | 1,430x940x320 | 990x940x320 | | 1,430x940x320 | |
| Weight | Unit | | kg | 67 | 81 | | 102 | 82 | | 101 | |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 52.0 | 76 | 77 | 83 | 76 | 77 | 83 | |
| | Heating | Nom. | m³/min | 48.0 | 83 | | 62 | 83 | | 62 | |
| Sound power level | Cooling | | dBA | 65 | 70 | 71 | 70 | | 71 | 70 | |
| Sound pressure level | Cooling | Nom./Silent operation | dBA | 48/43 | 53/- | 54/- | 53/- | | 54/- | 53/- | |
| | Heating | Nom. | dBA | 50 | 57 | 58 | 54 | 57 | 58 | 54 | |
| | Night quiet mode | Level 1 | dBA | - | 49 | | | | | | |
| Operation range | Cooling | Ambient | Min.~Max. °CDB | -5.0~46.0 | -5~46 | | | | | | |
| | Heating | Ambient | Min.~Max. °CWB | -15.0~15.5 | -15~15.5 | | | | | | |
| Refrigerant | Type/GWP | | | R-410A/1,975 | | | | | | | |
| Piping connections | Piping length | OU - IU | Max. | m | 30 | 50 | | | | | |
| | | System | Equivalent | m | 40 | 70 | | | | | |
| | Level difference | IU - OU | Max. | m | 15.0 | 30.0 | | | | | |
| | | IU - IU | Max. | m | - | 0.5 | | | | | |
| Power supply | Phase / Frequency / Voltage | | | Hz / V | 1~ / 50 / 220-240 | | 3N~ / 50 / 380-415 | | | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | A | 20 | - | | | | | |

(1) EER/COP according to Eurovent 2012, for use outside EU only



FUQ-C



RZQG100-125L8V1/Y1



BRC1E52A/B
(optional)




BRC7C58
(optional)



SEASONAL EFFICIENCY
Smart use of energy

- > Ideal solution for commercial spaces with **no or narrow false ceilings**
- > Low energy consumption thanks to specially developed small tube heat exchanger, DC fan motor and drain pump
- > Stylish unit blends easily with any interior, as the **flaps close entirely when not in operation**
- > Improved comfort thanks to automatic air flow adjustment to required load
- > **Individual flap control:** possibility to adapt the room layout by fixing the position of each flap individually (BRC1E52) in case you would refurbish or rearrange your interior
- > Can be installed in both new and existing buildings
- > Same outlook for all models (unified dimensions)
- > Auto swing function ensures **efficient air and temperature distribution**
- > Air can be discharged in **5 different angles** between 0 and 60°



- > Possibility to shut 1 or 2 flaps for easy installation in corners




- > Air flow distribution for ceiling heights up to 3.5m without capacity loss
- > **No optional adapter needed for DIII-connection**, link your unit into the wider building management system.



Heating & Cooling

Seasonal Smart

| Indoor unit | | | | FUQ71C | FUQ100C | FUQ125C | FUQ71C | FUQ100C | FUQ125C |
|--|------------------------------|---------------------------|----------------|--------------------------|---------------|----------------|--------------------|---------------|----------------|
| Cooling capacity | Min./Nom./Max. | | kW | -/6.8/- | -/9.5/- | -/12.0/- | -/6.8/- | -/9.5/- | -/12.0/- |
| Heating capacity | Min./Nom./Max. | | kW | -/7.5/- | -/10.8/- | -/13.5/- | -/7.5/- | -/10.8/- | -/13.5/- |
| Power input | Cooling | Nom. | kW | 1.68 | 2.46 | 3.54 | 1.68 | 2.46 | 3.54 |
| | Heating | Nom. | kW | 1.84 | 2.73 | 3.95 | 1.84 | 2.73 | 3.95 |
| Seasonal efficiency (according to EN14825)  | Cooling | Energy label | | A++ | | A+ | | A++ | |
| | | Pdesign | kW | 6.80 | 9.50 | 12.00 | 6.80 | 9.50 | 12.00 |
| | | SEER | | 6.50 | 6.11 | 5.61 | 6.50 | 6.11 | 5.61 |
| | | Annual energy consumption | kWh | 366 | 544 | 748 | 366 | 544 | 748 |
| | Heating (Average climate) | Energy label | | A+ | | | | | |
| | | Pdesign | kW | 7.60 | 11.30 | 14.13 | 7.60 | 11.30 | 14.13 |
| | | SCOP | | 4.20 | 4.50 | 4.44 | 4.20 | 4.50 | 4.44 |
| | | Annual energy consumption | kWh | 2,533 | 3,515 | 4,456 | 2,533 | 3,515 | 4,456 |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | 4.05 | 3.86 | 3.39 | 4.05 | 3.86 | 3.39 |
| | COP | | | 4.08 | 3.95 | 3.42 | 4.08 | 3.95 | 3.42 |
| | Annual energy consumption | | kWh | 840 | 1,230 | 1,770 | 840 | 1,230 | 1,770 |
| | Energy label | Cooling/Heating | A/A | | A/B | | A/A | | A/B |
| Casing | Colour | | Fresh White | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 198x950x950 | | | | | |
| Weight | Unit | | kg | 25 | 26 | 25 | 26 | 26 | 26 |
| Fan - Air flow rate | Cooling | High/Nom./Low | m³/min | 23/19.5/16 | 31/25.5/20 | 32.5/26.5/20.5 | 23/19.5/16 | 31/25.5/20 | 32.5/26.5/20.5 |
| | Heating | High/Nom./Low | m³/min | 23/19.5/16 | 31/25.5/20 | 32.5/26.5/20.5 | 23/19.5/16 | 31/25.5/20 | 32.5/26.5/20.5 |
| Sound power level | Cooling | | dBA | 59 | 64 | 65 | 59 | 64 | 65 |
| | Heating | | dBA | 59 | 64 | 65 | 59 | 64 | 65 |
| Sound pressure level | Cooling | High/Nom./Low | dBA | 41/38/35 | 46/42/39 | 47/43/40 | 41/38/35 | 46/42/39 | 47/43/40 |
| | Heating | High/Nom./Low | dBA | 41/38/35 | 46/42/39 | 47/43/40 | 41/38/35 | 46/42/39 | 47/43/40 |
| Piping connections | Liquid | OD | mm | 9.52 | | | | | |
| | Gas | OD | mm | 15.9 | | | | | |
| Power supply | Phase / Frequency / Voltage | | | 1~ / 50/60 / 220-240/220 | | | | | |
| Outdoor unit | | | | RZQG71L8V1 | RZQG100L8V1 | RZQG125L8V1 | RZQG71L8Y1 | RZQG100L8Y1 | RZQG125L8Y1 |
| Dimensions | Unit | HeightxWidthxDepth | mm | 990x940x320 | 1,430x940x320 | | 990x940x320 | 1,430x940x320 | |
| Weight | Unit | | kg | 78 | 102 | | 80 | 101 | |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 59 | 70 | | 59 | 70 | |
| | Heating | Nom. | m³/min | 49 | 62 | | 49 | 62 | |
| Sound power level | Cooling | / | dBA | 64 | 66 | 67 | 64 | 66 | 67 |
| Sound pressure level | Cooling | Nom. | dBA | 48 | 50 | 51 | 48 | 50 | 51 |
| | Heating | Nom. | dBA | 50 | 52 | 53 | 50 | 52 | 53 |
| | Night quiet mode | Level 1 | dBA | 43 | 45 | | 43 | 45 | |
| Operation range | Cooling | Ambient | Min.~Max. °CDB | -15~50 | | | | | |
| | Heating | Ambient | Min.~Max. °CWB | -20~15.5 | | | | | |
| Refrigerant | Type/GWP | | | R-410A/1,975 | | | | | |
| Piping connections | Piping length | OU - IU | Max. m | 50 | 75 | | 50 | 75 | |
| | | System | Equivalent m | 70 | 90 | | 70 | 90 | |
| | Level difference | IU - OU | Max. m | 30.0 | | | | | |
| | | IU - IU | Max. m | 0.5 | | | | | |
| Power supply | Phase / Frequency / Voltage | | | 1~ / 50 / 220-240 | | | 3N~ / 50 / 380-415 | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | 20 | 32 | | 16 | 20 | |

(1) EER/COP according to Eurovent 2012, for use outside EU only





FVQ100-140C



RZQG100-140L8/7V1/L(8)Y1



BRC1E52A/B
(optional)



SEASONAL EFFICIENCY
Smart use of energy

- › Ideal solution for shops, restaurants or offices with **no or narrow false ceilings**
- › Can be installed in both new and existing buildings
- › Very efficient for use in rooms with **high ceilings**
- › Decrease of temperature variation by automatic fan speed selection or freely selectable 3-step fan speed.
- › Improved comfort as a result of **better airflow distribution** from the vertical out blow which allows manual adjustment of air outlet blades at the top of the unit. Selectable horizontal out blow to better suit the layout of the room (via BRC1E52).
- › Improved efficiency by adoption of the **DC fan motor**.
- › **No optional adapter needed for DIII-connection**, link your unit into the wider building management system.

Heating & Cooling



| Indoor unit | | | | FVQ71C | FVQ100C | FVQ125C | FVQ140C | FVQ71C | FVQ100C | FVQ125C | FVQ140C | | | | |
|--|------------------------------|---------------------------|--------|--------------------------|----------|---------------|----------|---------------|----------|---------------|----------|----|---|---|--|
| Cooling capacity | Min./Nom./Max. | | kW | -/6.8/- | -/9.5/- | -/12.0/- | -/13.4/- | -/6.8/- | -/9.5/- | -/12.0/- | -/13.4/- | | | | |
| Heating capacity | Min./Nom./Max. | | kW | -/7.5/- | -/10.8/- | -/13.5/- | -/15.5/- | -/7.5/- | -/10.8/- | -/13.5/- | -/15.5/- | | | | |
| Power input | Cooling | Nom. | kW | 2.02 | 2.49 | 3.74 | 4.17 | 2.02 | 2.49 | 3.74 | 4.17 | | | | |
| | Heating | Nom. | kW | 2.06 | 2.61 | 3.65 | 4.30 | 2.06 | 2.61 | 3.65 | 4.30 | | | | |
| Seasonal efficiency (according to EN14825) | Cooling | Energy label | | A++ | | A+ | | - | | A++ | | A+ | | - | |
| | | Pdesign | kW | 6.80 | 9.50 | 12.00 | - | | 6.80 | 9.50 | 12.00 | - | | | |
| | | SEER | | 6.31 | 5.61 | | - | | 6.31 | 5.61 | | - | | | |
| | | Annual energy consumption | kWh | 377 | 592 | 748 | - | | 377 | 592 | 748 | - | | | |
| | Heating (Average climate) | Energy label | | A+ | | A | | - | | A+ | | A | | - | |
| | | Pdesign | kW | 6.33 | 11.30 | | - | | 6.33 | 11.30 | | - | | | |
| | | SCOP | | 4.05 | 4.20 | 3.87 | - | | 4.05 | 4.20 | 3.87 | - | | | |
| | | Annual energy consumption | kWh | 2,188 | 3,766 | 4,087 | - | | 2,188 | 3,766 | 4,087 | - | | | |
| Nominal efficiency cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | | 3.37 | 3.81 | 3.21 | | 3.37 | 3.81 | 3.21 | | | | | |
| | COP | | | 3.64 | 4.14 | 3.70 | 3.61 | 3.64 | 4.14 | 3.70 | 3.61 | | | | |
| | Annual energy consumption | kWh | | 1,010 | 1,245 | 1,870 | 2,085 | 1,010 | 1,245 | 1,870 | 2,085 | | | | |
| | Energy label | Cooling/Heating | | A/A | | | - | | | A/A | | | - | | |
| Casing | Colour | | | Fresh White | | | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,850x600x270 | | 1,850x600x350 | | 1,850x600x270 | | 1,850x600x350 | | | | | |
| Weight | Unit | | kg | 39 | | 47 | | 39 | | 47 | | | | | |
| Fan - Air flow rate | Cooling | High/Nom./Low | m³/min | 18/16/14 | 28/25/22 | 28/26/24 | 30/28/26 | 18/16/14 | 28/25/22 | 28/26/24 | 30/28/26 | | | | |
| | Heating | High/Nom./Low | m³/min | 18/16/14 | 28/25/22 | 28/26/24 | 30/28/26 | 18/16/14 | 28/25/22 | 28/26/24 | 30/28/26 | | | | |
| Sound power level | Cooling | | dBA | 55 | 62 | 63 | 65 | 55 | 62 | 63 | 65 | | | | |
| | Heating | | dBA | 55 | 62 | 63 | 65 | 55 | 62 | 63 | 65 | | | | |
| Sound pressure level | Cooling | High/Nom./Low | dBA | 43/41/38 | 50/47/44 | 51/48/46 | 53/51/48 | 43/41/38 | 50/47/44 | 51/48/46 | 53/51/48 | | | | |
| | Heating | High/Nom./Low | dBA | 43/41/38 | 50/47/44 | 51/48/46 | 53/51/48 | 43/41/38 | 50/47/44 | 51/48/46 | 53/51/48 | | | | |
| Piping connections | Liquid | OD | mm | 9.52 | | | | | | | | | | | |
| | Gas | OD | mm | 15.9 | | | | | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | 1~ / 50/60 / 220-240/220 | | | | | | | | | | | |


| Outdoor unit | | | | | RZQG71L8V1 | RZQG100L8V1 | RZQG125L8V1 | RZQG140L7V1 | RZQG71L8Y1 | RZQG100L8Y1 | RZQG125L8Y1 | RZQG140LY1 | |
|----------------------|-----------------------------|--------------------|------------|--------------|-------------------|-------------|-------------|-------------|--------------------|---------------|-------------|------------|--|
| Dimensions | Unit | HeightxWidthxDepth | mm | 990x940x320 | 1,430x940x320 | | | | 990x940x320 | 1,430x940x320 | | | |
| Weight | Unit | | kg | 78 | 102 | | | | 80 | 101 | | | |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 59 | 70 | | 84 | 59 | 70 | | 84 | | |
| | Heating | Nom. | m³/min | 49 | 62 | | | 49 | 62 | | | | |
| Sound power level | Cooling | | dBA | 64 | 66 | 67 | 69 | 64 | 66 | 67 | 69 | | |
| Sound pressure level | Cooling | Nom. | dBA | 48 | 50 | 51 | 52 | 48 | 50 | 51 | 52 | | |
| | Heating | Nom. | dBA | 50 | 52 | 53 | | 50 | 52 | 53 | | | |
| | Night quiet mode | Level 1 | dBA | 43 | 45 | | | | 43 | 45 | | | |
| Operation range | Cooling | Ambient | Min.~Max. | °CDB | -15~50 | | | | | | | | |
| | Heating | Ambient | Min.~Max. | °CWB | -20~15.5 | | | | | | | | |
| Refrigerant | Type/GWP | | | R-410A/1,975 | | | | | | | | | |
| Piping connections | Piping length | OU - IU | Max. | m | 50 | 75 | | 50 | 75 | | | | |
| | | System | Equivalent | m | 70 | 90 | | 70 | 90 | | | | |
| | Level difference | IU - OU | Max. | m | 30.0 | | | | | | | | |
| | | IU - IU | Max. | m | 0.5 | | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | Hz / V | 1~ / 50 / 220-240 | | | | 3N~ / 50 / 380-415 | | | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | A | 20 | 32 | | 16 | 20 | | | | |

(1) EER/COP according to Eurovent 2012, for use outside EU only.



Heating & Cooling

Seasonal Classic

| Indoor unit | | | | FVQ71C | FVQ100C | FVQ125C | FVQ140C | FVQ100C | FVQ125C | FVQ140C | | |
|--|---------------------------------|---------------------------|--------|--------------------------|----------|---------------|----------|----------|----------|----------|-----|---|
| Cooling capacity | Min./Nom./Max. | | kW | -/6.8/- | -/9.5/- | -/12.0/- | -/13.4/- | -/9.5/- | -/12.0/- | -/13.4/- | | |
| Heating capacity | Min./Nom./Max. | | kW | -/7.5/- | -/10.8/- | -/13.5/- | -/15.5/- | -/10.8/- | -/13.5/- | -/15.5/- | | |
| Power input | Cooling | Nom. | kW | 2.12 | 2.96 | 4.27 | 4.45 | 2.96 | 4.27 | 4.45 | | |
| | Heating | Nom. | kW | 2.08 | 2.99 | 3.96 | 4.54 | 2.99 | 3.96 | 4.54 | | |
| <div>Seasonal efficiency (according to EN14825)</div> <div></div> | Cooling | Energy label | | A | | | - | A | | - | | |
| | | Pdesign | kW | 6.80 | 9.50 | 12.00 | - | 9.50 | 12.00 | - | | |
| | | SEER | | 5.50 | | | - | 5.50 | | - | | |
| | | Annual energy consumption | kWh | 433 | 604 | 763 | - | 604 | 763 | - | | |
| | Heating (Average climate) | Energy label | | A | | | A+ | A | - | A+ | A | - |
| | | Pdesign | kW | 6.33 | 7.60 | | 7.60 | - | 7.60 | | - | |
| | | SCOP | | 3.86 | 4.01 | 3.85 | - | 4.01 | 3.85 | - | | |
| | | Annual energy consumption | kWh | 2,296 | 2,653 | 2,763 | - | 2,653 | 2,763 | - | | |
| Nominal efficiency (cooling at 35°/27° nominal load, heating at 7°/20° nominal load) | EER | | 3.21 | | | 2.81 | 3.01 | 3.21 | 2.81 | 3.01 | | |
| | COP | | 3.61 | | | 3.41 | | 3.61 | 3.41 | | | |
| | Annual energy consumption | | kWh | 1,060 | 1,480 | 2,135 | 2,225 | 1,480 | 2,135 | 2,225 | | |
| | Energy label | Cooling/Heating | | A/A | | | C/B | | - | A/A | C/B | - |
| Casing | Colour | | | Fresh White | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,850x600x270 | | 1,850x600x350 | | | | | | |
| Weight | Unit | | | kg | 39 | | 47 | | | | | |
| Fan - Air flow rate | Cooling | High/Nom./Low | m³/min | 18/16/14 | 28/25/22 | 28/26/24 | 30/28/26 | 28/25/22 | 28/26/24 | 30/28/26 | | |
| | Heating | High/Nom./Low | m³/min | 18/16/14 | 28/25/22 | 28/26/24 | 30/28/26 | 28/25/22 | 28/26/24 | 30/28/26 | | |
| Sound power level | Cooling | | | dBA | 55 | 62 | 63 | 65 | 62 | 63 | 65 | |
| | Heating | | | dBA | 55 | 62 | 63 | 65 | 62 | 63 | 65 | |
| Sound pressure level | Cooling | High/Nom./Low | dBA | 43/41/38 | 50/47/44 | 51/48/46 | 53/51/48 | 50/47/44 | 51/48/46 | 53/51/48 | | |
| | Heating | High/Nom./Low | dBA | 43/41/38 | 50/47/44 | 51/48/46 | 53/51/48 | 50/47/44 | 51/48/46 | 53/51/48 | | |
| Piping connections | Liquid | OD | mm | 9.52 | | | | | | | | |
| | Gas | OD | mm | 15.9 | | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | 1~ / 50/60 / 220-240/220 | | | | | | | | |

| Outdoor unit | | | | RZQSG71L3V1 | RZQSG100L8V1 | RZQSG125L8V1 | RZQSG140L1V1 | RZQSG100L8Y1 | RZQSG125L8Y1 | RZQSG140L1Y1 |
|----------------------|-----------------------------|-----------------------|------------|-------------------|--------------|--------------|---------------|--------------------|--------------|---------------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 770x900x320 | 990x940x320 | | 1,430x940x320 | 990x940x320 | | 1,430x940x320 |
| Weight | Unit | | | kg | 67 | 81 | 102 | 82 | | 101 |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 52 | 76 | 77 | 83 | 76 | 77 | 83 |
| | Heating | Nom. | m³/min | 48 | 83 | | 62 | 83 | | 62 |
| Sound power level | Cooling | | | dBA | 65 | 69 | 70 | 69 | | 69 |
| Sound pressure level | Cooling | Nom./Silent operation | dBA | 49/47 | 53/49 | 54/49 | 53/49 | 53/- | 54/- | 53/- |
| | Heating | Nom. | dBA | 51 | 57 | 58 | 54 | 57 | 58 | 54 |
| | Night quiet mode | Level 1 | dBA | - | | | | | | |
| Operation range | Cooling | Ambient | Min.-Max. | °CDB -15~-46 | | | | | | |
| | Heating | Ambient | Min.-Max. | °CWB -15~-15.5 | | | | | | |
| Refrigerant | Type/GWP | | | R-410A/1,975 | | | | | | |
| Piping connections | Piping length | OU - IU | Max. | m 50 | | | | | | |
| | | System | Equivalent | m 40 | | | | | | |
| | Level difference | IU - OU | Max. | m 30 | | | | | | |
| | | IU - IU | Max. | m 0.5 | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | 1~ / 50 / 220-240 | | | | 3N~ / 50 / 380-415 | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | A 20 | | 32 | | 20 | | |

(1) EER/COP according to Eurovent 2012, for use outside EU only.

Twin/triple/double twin and multi application

The benefits of a twin/triple/double twin system

- **Air conditioning in long or irregularly shaped rooms**
A twin/triple/double twin application allows up to 4 indoor units to operate in L-shaped, U-shaped or long rooms powered by a single outdoor unit.
All indoor units are controlled at the same time.
- **The widest choice**
Different types of indoor units – wall mounted, concealed ceiling, cassettes etc – can be selected for twin/triple/double twin application
- **Ideal comfort in every part of the room**
Delivery of optimal efficiency and comfort in each part of a long or irregularly shaped room.



Possible outdoor units

Seasonal Smart



RZQG71-140L8/7V1/L(8)Y1

Seasonal Classic



RZQSG71-140L(3/8)V1/L(8)Y1

Super Inverter



RZQ200-250C

The Benefits of a Multi system

- **Air conditioning in every room**
A Multi system allows up to 9 indoor units to operate from a single outdoor unit, thereby reducing installation space and costs. All indoor units can be individually controlled and do not need to be installed at the same time - extra units (up to a maximum of 9) can be added later.
- **The widest choice**
Different types of indoor units — wall mounted, concealed ceiling, floor standing etc - in different capacities can be mixed together in Multi system applications. Thus the ideal indoor unit can be selected for the bedroom, living room, office or wherever, according to the installation surface or personal requirements.
- **An ideal indoor climate**
A single outdoor unit can heat up or cool down a complete house, office or small shop at different times. A pleasant climate can be enjoyed whilst working at the desk in the afternoon, as well as a constant temperature in the living room and cool bedrooms in the evening.



Possible outdoor units

Multi outdoor units:



2MXS
2 indoor units



3MXS
3 indoor units



4MXS
4 indoor units




5MXS
5 indoor units

VRVIII-S for residential application:



RXYSQ-P8V1
9 indoor units



- > Seasonal efficiency, optimized for all seasons
- > Seasonal smart series comply with the EU's 2014 Eco-Design requirements
- > The perfect balance in efficiency and comfort thanks to **Variable Refrigerant Temperature**: top seasonal efficiency throughout most of the year and quick reaction speed on the hottest days
- > Suits **computer room applications** (EDP)
- > **Re-use** of existing R-22 or R-407C technology 
- > Down to **-20°C** in heating mode
- > Standard **night quiet mode**
- > Maximum **piping length** up to 75m minimum piping length is 5m
- > Compatibility with **D-BACS**



| | | FCQHG-F | FCQG-F | | | | FFQ-C | | | FDXS-F (9) | | | FBQ-C8 | | | | FHQ-C | | | | FAQ-C | FUQ-C |
|----------------|-------------|---------|--------|----|----|----|-------|----|----|------------|----|----|--------|----|----|----|-------|----|----|----|-------|-------|
| capacity class | | 71 | 35 | 50 | 60 | 71 | 35 | 50 | 60 | 35 | 50 | 60 | 35 | 50 | 60 | 71 | 35 | 50 | 60 | 71 | 71 | 71 |
| RZQG71L8V1 | RZQG71L8Y1 | | 2 | | | | 2 | | | 2 | | | 2 | | | | 2 | | | | | |
| RZQG100L8V1 | RZQG100L8Y1 | | 3 | 2 | | | 3 | 2 | | 3 | 2 | | 3 | 2 | | | 3 | 2 | | | | |
| RZQG125L8V1 | RZQG125L8Y1 | | 4 | 3 | 2 | | 4 | 3 | 2 | 4 | 3 | 2 | 4 | 3 | 2 | | 4 | 3 | 2 | | | |
| RZQG140L7V1 | RZQG140LY1 | 2 | 4 | 3 | | 2 | 4 | 3 | | 4 | 3 | | 4 | 3 | | 2 | 4 | 3 | | 2 | 2 | 2 |

Heating & Cooling



| Indoor unit | | | | | RZQG71L8V1 | RZQG100L8V1 | RZQG125L8V1 | RZQG140L7V1 | RZQG71L8Y1 | RZQG100L8Y1 | RZQG125L8Y1 | RZQG140LY1 | | | | | | | | | | |
|----------------------|-----------------------------|--------------------|------------|------|--------------|-------------|--------------------|-------------|------------|-------------|-------------|---------------|--------------------|----------|----|----|----|----|----|--|----|--|
| Dimensions | Unit | HeightxWidthxDepth | mm | | 990x940x320 | | 1,430x940x320 | | | 990x940x320 | | 1,430x940x320 | | | | | | | | | | |
| Weight | Unit | | | | kg | | 78 | | 102 | | | 80 | | 101 | | | | | | | | |
| Fan - Air flow rate | Cooling | Nom. | m³/min | | 59 | | 70 | | 84 | | 59 | | 70 | | 84 | | | | | | | |
| | Heating | Nom. | m³/min | | 49 | | 62 | | | 49 | | 62 | | | | | | | | | | |
| Sound power level | Cooling | | | | dBA | | 64 | | 66 | | 67 | | 69 | | 64 | | 66 | | 67 | | 69 | |
| Sound pressure level | Cooling | Nom. | | | dBA | | 48 | | 50 | | 51 | | 52 | | 48 | | 50 | | 51 | | 52 | |
| | Heating | Nom. | | | dBA | | 50 | | 52 | | 53 | | | 50 | | 52 | | 53 | | | | |
| | Night quiet mode | Level 1 | | | dBA | | 43 | | 45 | | | 43 | | 45 | | | | | | | | |
| Operation range | Cooling | Ambient | Min.~Max. | °CDB | | | | | | | | | | -15~50 | | | | | | | | |
| | Heating | Ambient | Min.~Max. | °CWB | | | | | | | | | | -20~15.5 | | | | | | | | |
| Refrigerant | Type/GWP | | | | R-410A/1,975 | | | | | | | | | | | | | | | | | |
| Piping connections | Piping length | OU - IU | Max. | m | | 50 | | 75 | | | 50 | | 75 | | | | | | | | | |
| | | System | Equivalent | m | | 70 | | 90 | | | 70 | | 90 | | | | | | | | | |
| | Level difference | IU - OU | Max. | m | | | | | | | | | | 30.0 | | | | | | | | |
| | | IU - IU | Max. | m | | | | | | | | | | 0.5 | | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | | Hz / V | | 1 ~ / 50 / 220-240 | | | | | | 3N~ / 50 / 380-415 | | | | | | | | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | | A | | 20 | | 32 | | | 16 | | 20 | | | | | | | | |



- › Seasonal efficiency, optimized for all seasons
- › **Re-use** of existing R-22 or R-407C technology
- › Down to **-15°C** in heating mode
- › Maximum **pipng length** up to 50m
- › Compatibility with **D-BACS**




| | | FCQHG-F | FCQG-F | | | | FFQ-C | | | FDXS-F(9) | | | FBQ-C8 | | | | FHQ-C | | | | FAQ-C |
|----------------|--------------|---------|--------|----|----|----|-------|----|----|-----------|----|----|--------|----|----|----|-------|----|----|----|-------|
| Capacity class | | 71 | 35 | 50 | 60 | 71 | 35 | 50 | 60 | 35 | 50 | 60 | 35 | 50 | 60 | 71 | 35 | 50 | 60 | 71 | 71 |
| RZQSG71L3V1 | | | 2 | | | | 2 | | | 2 | | | 2 | | | | 2 | | | | |
| RZQSG100L8V1 | RZQSG100L8Y1 | | 3 | 2 | | | 3 | 2 | | 3 | 2 | | 3 | 2 | | | 3 | 2 | | | |
| RZQSG125L8V1 | RZQSG125L8Y1 | | 4 | 3 | 2 | | 4 | 3 | 2 | 4 | 3 | 2 | 4 | 3 | 2 | | 4 | 3 | 2 | | |
| RZQSG140LV1 | RZQSG140LY1 | 2 | 4 | 3 | | 2 | 4 | 3 | | 4 | 3 | | 4 | 3 | | 2 | 4 | 3 | | 2 | 2 |



Seasonal Classic

Heating & Cooling

| Outdoor unit | | | | RZQSG71L3V1 | RZQSG100L8V1 | RZQSG125L8V1 | RZQSG140LV1 | RZQSG100L8Y1 | RZQSG125L8Y1 | RZQSG140LY1 |
|----------------------|-----------------------------|-----------------------|----------------|-------------|--------------------|--------------|---------------|--------------|---------------------|---------------|
| Dimensions | Unit | HeightxWidthxDepth | mm | 770x900x320 | 990x940x320 | | 1,430x940x320 | | 990x940x320 | 1,430x940x320 |
| Weight | Unit | | kg | 67 | 81 | | 102 | | 82 | 101 |
| Fan - Air flow rate | Cooling | Nom. | m³/min | 52 | 76 | 77 | 83 | 76 | 77 | 83 |
| | Heating | Nom. | m³/min | 48 | | 83 | 62 | | 83 | 62 |
| Sound power level | Cooling | | dBA | 65 | 69 | 70 | 69 | | 70 | 69 |
| Sound pressure level | Cooling | Nom./Silent operation | dBA | 49/47 | 53/49 | 54/49 | 53/49 | 53/- | 54/- | 53/- |
| | Heating | Nom. | dBA | 51 | 57 | 58 | 54 | 57 | 58 | 54 |
| | Night quiet mode | Level 1 | dBA | | | | | | 49 | |
| Operation range | Cooling | Ambient | Min.~Max. °CDB | | | | -15~46 | | | |
| | Heating | Ambient | Min.~Max. °CWB | | | | -15~15.5 | | | |
| Refrigerant | Type/GWP | | | | | | R-410A/1,975 | | | |
| Piping connections | Piping length | OU - IU | Max. m | | | | 50 | | | |
| | | System | Equivalent m | 40 | | | 70 | | | |
| | Level difference | IU - OU | Max. m | | | | 30 | | | |
| | | IU - IU | Max. m | | | | 0.5 | | | |
| Power supply | Phase / Frequency / Voltage | Hz / V | | | 1 ~ / 50 / 220-240 | | | | 3N ~ / 50 / 380-415 | |
| Current - 50Hz | Maximum fuse amps (MFA) | A | | 20 | | 32 | | | 20 | |

- > **Re-use** of existing R-22 or R-407C piping 
- > Down to **-15°C** in heating mode
- > Standard **night quiet mode**
- > Maximum **piping length** up to 100m
- > Maximum **installation height difference** up to 30m



| | FCQG-F | | | | | FFQ-C | | FDXS-F(9) | | FBQ-C8 | | | | | FHQ-C | | | | | FUQ-C | | | FAQ-C | | FDQ-C |
|----------------|--------|----|----|-----|-----|-------|----|-----------|----|--------|----|----|-----|-----|-------|----|----|-----|-----|-------|-----|-----|-------|-----|-------|
| Capacity class | 50 | 60 | 71 | 100 | 125 | 50 | 60 | 50 | 60 | 50 | 60 | 71 | 100 | 125 | 50 | 60 | 71 | 100 | 125 | 71 | 100 | 125 | 71 | 100 | 125 |
| RZQ200C | 4 | 3 | 3 | 2 | | 4 | 3 | 4 | 3 | 4 | 3 | 3 | 2 | | 4 | 3 | 3 | 2 | | 3 | 2 | | 3 | 2 | |
| RZQ250C | | 4 | | | 2 | | 4 | | 4 | | 4 | | | 4 | | 2 | | | 2 | | | 2 | | | 2 |

Heating & Cooling



| Outdoor unit | | | | | RZQ200C | | | | | RZQ250C | | | | |
|--------------------------------|-----------------------------|--------------------|-----------|------|--------------------|--|--|--|--|--------------------|--|--|--|--|
| Dimensions | Unit | HeightxWidthxDepth | mm | | 1,680x930x765 | | | | | 184 | | | | |
| Weight | Unit | | kg | | 183 | | | | | 184 | | | | |
| Fan - Air flow rate | Cooling | Nom. | m³/min | | 171 | | | | | 171 | | | | |
| | Heating | Nom. | m³/min | | 171 | | | | | 171 | | | | |
| Fan - External static pressure | | Max. | Pa | | 78 | | | | | 78 | | | | |
| Sound power level | Cooling | | dBA | | 78 | | | | | 78 | | | | |
| | Heating | | dBA | | 78 | | | | | 78 | | | | |
| Sound pressure level | Nom. | | dBA | | 57 | | | | | 57 | | | | |
| Operation range | Cooling | Ambient | Min.~Max. | °CDB | -5.0~46.0 | | | | | -5.0~46.0 | | | | |
| | Heating | Ambient | Min.~Max. | °CWB | -15.0~15.0 | | | | | -15.0~15.0 | | | | |
| Refrigerant | Type/GWP | | | | R-410A/1,975 | | | | | R-410A/1,975 | | | | |
| Piping connections | Piping length | OU - IU | Max. | m | 100 | | | | | 100 | | | | |
| | Level difference | IU - OU | Max. | m | - | | | | | - | | | | |
| Power supply | Phase / Frequency / Voltage | | Hz / V | | 3N~ / 50 / 380-415 | | | | | 3N~ / 50 / 380-415 | | | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | A | | 20 | | | | | 20 | | | | |



- > Wide range from 2 to 5 port units
- > Possibility to connect **up to 5 indoor units**
- > 3-port 40 multi outdoor unit gives an answer to lower capacity requirements of better insulated houses. The 15-class wall mounted allows efficient distribution of the lower capacity of the multi outdoor unit.
- > All indoor units can be **individually controlled** and do not need to be installed in the same room or even at the same time
- > Outdoor units are fitted with a **Daikin swing compressor** renowned for its low noise and high energy efficiency
- > **Possibility to combine different types of indoor units:** wall mounted, floor standing, concealed ceiling, ceiling suspended units, round flow or 4-way blow cassettes



Heating & Cooling

| Connectable indoor units | Wall mounted | | | | | | | | | | | | | | Floor standing | | | | | | Flexi type | | | | | | Round flow cassette | | | Fully flat cassette | | | | Concealed ceiling | | | | | | Ceiling suspended | | | | | | | | |
|--------------------------|--------------|----|----|----|--------|----|--------|----|----|----|--------|----|--------|----|----------------|----|----|--------|----|----|------------|----|----|----|----|----|---------------------|----|----|---------------------|----|----|----|-------------------|----|----|----|---------------|----|-------------------|----|-------|----|----|---|---|---|---|
| | FTXG-L | | | | CTXS-K | | FTXS-K | | | | FTXS-G | | FTX-JV | | FVXG-K | | | FVXS-F | | | FLXS-B(9) | | | | | | FCQG-F | | | FFQ-C | | | | FDXS-F(9) | | | | FDBQ-B/FBQ-C8 | | | | FHQ-C | | | | | | |
| | 20 | 25 | 35 | 50 | 15 | 35 | 20 | 25 | 35 | 42 | 50 | 60 | 71 | 20 | 25 | 35 | 25 | 35 | 50 | 25 | 35 | 50 | 25 | 35 | 50 | 60 | 35 | 50 | 60 | 25 | 35 | 50 | 60 | 25 | 35 | 50 | 60 | 25 | 35 | 50 | 60 | 35 | 50 | 60 | | | | |
| 2MXS40H | ● | ● | ● | | ● | ● | ● | ● | ● | | | | | ● | ● | ● | ● | ● | ● | ● | ● | | ● | ● | | | ● | ● | | | | | ● | ● | | | | | | | | | | | | | | |
| 2MXS50H | ● | ● | ● | | ● | ● | ● | ● | ● | ● | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | | | | ● | ● | ● | | ● | ● | ● | | | | | | | | | | | |
| 3MXS40K | ● | ● | ● | | ● | ● | ● | ● | ● | | | | | | | | ● | ● | ● | ● | ● | ● | ● | ● | | | ● | | | | ● | ● | | | | | | | | | | | ● | | | | | |
| 3MXS52E | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | | ● | ● | | | ● | ● | ● | | ● | ● | ● | | ● | ● | ● | | | ● | ● | ● | ● | |
| 3MXS68G | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | ● | ● | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| 4MXS68F | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | ● | ● | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| 4MXS80E | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | ● | ● | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | |
| 5MXS90E | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | | | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | | ● | ● | ● | | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |



Heating & Cooling

| Outdoor unit | | | | | 2MXS40H | 2MXS50H | 3MXS40K | 3MXS52E | 3MXS68G | 4MXS68F | 4MXS80E | 5MXS90E |
|----------------------|-----------------------------|--------------------|-----------|--------|--------------|----------|--|-------------|----------------|----------------|-------------|--------------------------------|
| Dimensions | Unit | HeightxWidthxDepth | | mm | 550x765x285 | | | 735x936x300 | | | 770x900x320 | |
| Weight | Unit | | | | kg | 38 | 42 | 49 | | 58 | | 72 73 |
| Fan - Air flow rate | Cooling | High/Nom./Low | | m³/min | 36/33/30 | 37/34/34 | 45/45/41 | 45/45/45 | | 52.7/49.4/43.5 | | 54.5/46/46.0 57.1/54.5/46.0 |
| | Heating | High/Nom./Low | | m³/min | 32/32/32 | 34/34/34 | 45/-/41 | | 46.4/44.5/16.3 | | 46.0/-/14.7 | 52.5/-/14.7 |
| Sound power level | Cooling | | | | dBA | 62 | 63 | 59 | | 61 | | 62 66 |
| Sound pressure level | Cooling | Nom. | | dBA | 47 | 48 | 46 | | 48 | | 52 | |
| | Heating | Nom. | | dBA | 48 | 50 | 47 | | 49 | | 52 | |
| Operation range | Cooling | Ambient | Min.~Max. | °CDB | 10~46 | | | -10~46 | | | | |
| | Heating | Ambient | Min.~Max. | °CWB | -15~18 | | | | | | | |
| Refrigerant | Type/GWP | | | | R-410A/1,975 | | | | | | | |
| Piping connections | Piping length | OU - IU | Max. | m | 20 | | | 25 | | | | |
| | Level difference | IU - OU | Max. | m | 15 | | | | | | | |
| | | IU - IU | Max. | m | 7.5 | | | | | | | |
| Power supply | Phase / Frequency / Voltage | | | | Hz / V | | 1 ~ / 50 / 220-240 1 ~ / 50 / 230 | | | | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | | A | | 16 | | 20 | | | |

- › **Energy efficient heating system** based on air source heat pump technology
- › Low energy bills and low CO₂ emissions
- › Possibility to **connect up to 9 indoor units**
- › All indoor units can be **individually controlled** and do not need to be installed in the same room or even at the same time
- › **Possibility to combine different types of indoor units:** wall mounted, floor standing, concealed ceiling, ceiling suspended units, round flow or 4-way blow cassettes
- › Slim design for flexible installation
- › **Easy installation** thanks to automatic refrigerant charging operation, automatic test operation
- › Possibility to **limit peak power consumption between 30 and 80%**, for example during periods with high power demand



Heating & Cooling

| Connectable indoor units | Wall mounted | | | | | | | | | | | | Floor standing | | | | | | Flexi type | | | | Round flow cassette | | | Fully flat cassette | | | | Concealed ceiling | | | | | | | | Ceiling suspended | | | | | | | |
|--------------------------|--------------|----|----|----|--------|----|----|----|--------|----|----|----|----------------|----|----|----|--------|----|------------|--------|----|----|---------------------|----|----|---------------------|--------|----|----|-------------------|----|----|----|-----------|----|----|----|-------------------|----|----|----|-------|---|---|---|
| | FTXG-L | | | | CTXS-K | | | | FTXS-K | | | | FTXS-G | | | | FVXG-K | | | FVXS-F | | | FLXS-B(9) | | | | FCQG-F | | | FFQ-C | | | | FDXS-F(9) | | | | FDBQ-B / FBQ-C8 | | | | FHQ-C | | | |
| | 20 | 25 | 35 | 50 | 15 | 35 | 20 | 25 | 35 | 42 | 50 | 60 | 71 | 25 | 35 | 50 | 25 | 35 | 50 | 25 | 35 | 50 | 60 | 35 | 50 | 60 | 25 | 35 | 50 | 60 | 25 | 35 | 50 | 60 | 25 | 35 | 50 | 60 | 35 | 50 | 60 | | | | |
| RXYSO-P8V1 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |

Heating & Cooling



| Outdoor unit | | | | | RXYSQ4P8V1 | | | RXYSQ5P8V1 | | | RXYSQ6P8V1 | | | | |
|--|-------------------------|--------------------|--------|------|---------------|---------------------|----------|----------------|-------------------|----------------|----------------|-------------------|--|--|--|
| Capacity range | | | | HP | 4 | | | 5 | | | 6 | | | | |
| Cooling capacity | Nom. | | | kW | 12.6 | | | 14.0 | | | 15.5 | | | | |
| Heating capacity | Nom. | | | kW | 14.2 | | | 16.0 | | | 18.0 | | | | |
| Power input - 50Hz | Cooling | Nom. | | kW | 3.24 | | | 3.51 | | | 4.53 | | | | |
| | Heating | Nom. | | kW | 3.12 | | | 3.86 | | | 4.57 | | | | |
| EER | | | | | 3.89 | | | 3.99 | | | 3.42 | | | | |
| COP | | | | | 4.55 | | | 4.15 | | | 3.94 | | | | |
| Maximum number of connectable indoor units | | | | | 8 (1) / 8 (2) | | | 10 (1) / 9 (2) | | | 12 (1) / 9 (2) | | | | |
| Indoor index connection | Min. | | | | 50 | | | 62.5 | | | 70 | | | | |
| | Nom. | | | | | | | - | | | | | | | |
| | Max. | | | | 130 | | | 162.5 | | | 182 | | | | |
| Dimensions | Unit | HeightxWidthxDepth | | mm | | | | 1,345x900x320 | | | | | | | |
| Weight | Unit | | | | kg | | | 120 | | | | | | | |
| Fan | Air flow rate | Cooling | Nom. | | m³/min | | | 106 | | | | | | | |
| Sound power level | Cooling | Nom. | | dBA | 66 | | | 67 | | | 69 | | | | |
| Sound pressure level | Cooling | Nom. | | dBA | 50 | | | 51 | | | 53 | | | | |
| | Heating | Nom. | | dBA | 52 | | | 53 | | | 55 | | | | |
| Operation range | Cooling | Min.~Max. | | °CDB | | | -5~46 | | | | | | | | |
| | Heating | Min.~Max. | | °CWB | | | -20~15.5 | | | | | | | | |
| Refrigerant | Type | | | | | | | R-410A | | | | | | | |
| Piping connections | Liquid | OD | | mm | | | | | 9.52 | | | | | | |
| | Gas | OD | | mm | | 15.9 (1) / 19.1 (2) | | | | | | 19.1 | | | |
| | Total piping length | System | Actual | m | | 300 (1) / 115 (2) | | | 300 (1) / 135 (2) | | | 300 (1) / 145 (2) | | | |
| Power supply | Phase/Frequency/Voltage | | | | Hz/V | | | | | 1N~/50/220-240 | | | | | |
| Current - 50Hz | Maximum fuse amps (MFA) | | | | A | | | | | 32.0 | | | | | |

(1) In case VRV indoor units are connected (2) In case RA indoors are connected



| Branch provider | | | BPMKS967B2 | | BPMKS967B3 | |
|---------------------------------------|------------------------|----|-------------|--|------------|--|
| Connectable indoor units | | | 1~2 | | 1~3 | |
| Max. indoor unit connectable capacity | | | 14.2 | | 20.8 | |
| Max. connectable combination | | | 71+71 | | 60+71+71 | |
| Dimensions | Height x Width x Depth | mm | 180x294x350 | | | |
| Weiaht | | ka | 7 | | 8 | |





Ventilation


| | |
|----------------------------|----|
| Biddle Air Curtain for ERQ | 58 |
| Heat Reclaim Ventilation | 60 |
| Air handling units | 62 |



CYQM150DK80FSN

- › Connectable to ERQ heat pump
- › ERQ is among the first DX system suitable for connection to air curtains
- › Free-hanging model (F): easy wall mounted installation
- › A payback period of less than 1.5 years compared to installing an electric air curtain
- › Easy and quick to install at reduced costs since no additional water systems, boilers and gas connections are required
- › Maximum energy efficiency stemming from almost zero down flow turbulence, optimised air flow and the application of advanced discharge rectifier technology
- › Around 85% air separation efficiency, greatly reducing both heat loss and required indoor unit heating capacity




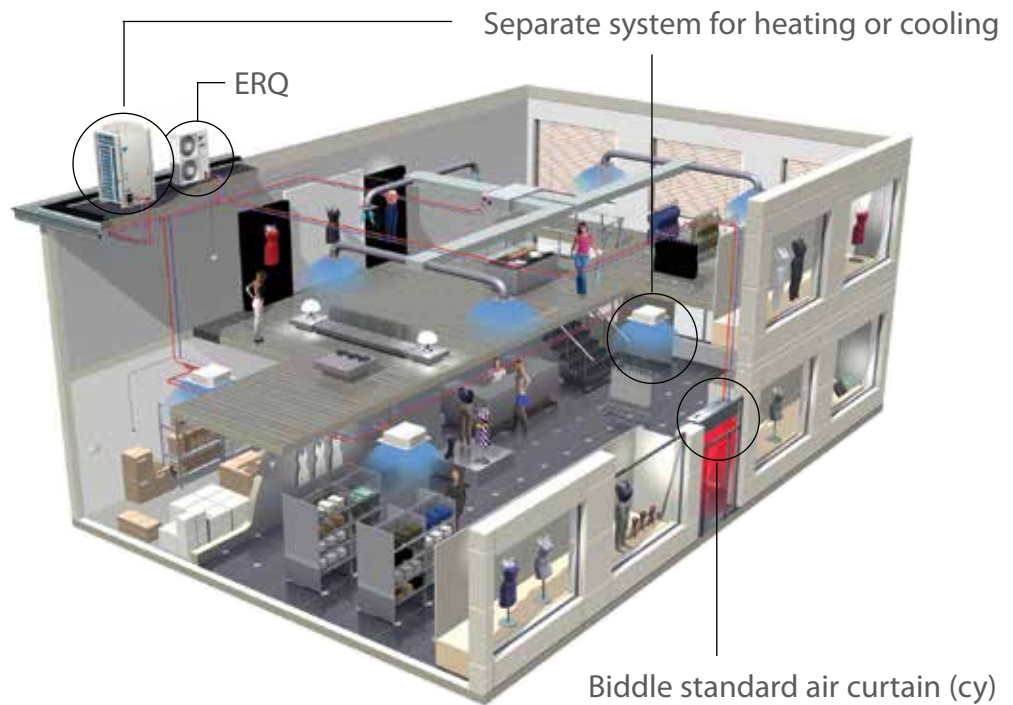

| | | | | Small | | | Medium | | | |
|---|-------------------------|------------|----|---|------------------------------|------------------------------|---|-----------------------------|-----------------------------|-----------------------------|
| BIDDLE STANDARD AIR CURTAIN FOR CONNECTION TO ERQ | | | | CYQS150DK80F *BN / *SN | CYQS200DK100F *BN / *SN | CYQS250DK140F *BN / *SN | CYQM100DK80F *BN / *SN | CYQM150DK80F *BN / *SN | CYQM200DK100F *BN / *SN | CYQM250DK140F *BN / *SN |
| Power input | Fan only | Nom. | kW | 0.35 | 0.46 | 0.58 | 0.37 | 0.56 | 0.75 | 0.94 |
| | Heating | Nom. | kW | 0.35 | 0.46 | 0.58 | 0.37 | 0.56 | 0.75 | 0.94 |
| Delta T | Inlet= room temperature | | | 15 | | 16 | 17 | 14 | 13 | 15 |
| Casing | Colour | | | BN: RAL9010 / SN: RAL9006 | | | BN: RAL9010 / SN: RAL9006 | | | |
| Dimensions | Height | Unit F/C/R | mm | 270 / 270 / 270 | | | 270 / 270 / 270 | | | |
| | Width | Unit F/C/R | mm | 1,500 / 1,500 / 1,548 | 2,000 / 2,000 / 2,048 | 2,500 / 2,500 / 2,548 | 1,000 / 1,000 / 1,048 | 1,500 / 1,500 / 1,548 | 2,000 / 2,000 / 2,048 | 2,500 / 2,500 / 2,548 |
| | Depth | Unit F/C/R | mm | 290 / 821 / 561 | | | 290 / 821 / 561 | | | |
| Required ceiling void > | | | mm | 420 | | | 420 | | | |
| Door height | Max. | m | | 2.3 (1) / 2.15 (2) / 2.0 (3) | 2.3 (1) / 2.15 (2) / 2.0 (3) | 2.3 (1) / 2.15 (2) / 2.0 (3) | 2.5 (1) / 2.4 (2) / 2.3 (3) | 2.5 (1) / 2.4 (2) / 2.3 (3) | 2.5 (1) / 2.4 (2) / 2.3 (3) | 2.5 (1) / 2.4 (2) / 2.3 (3) |
| Door width | Max. | m | | 1.5 | 2.0 | 2.5 | 1.0 | 1.5 | 2.0 | 2.5 |
| Weight | Unit | kg | | 66 | 83 | 107 | 57 | 73 | 94 | 108 |
| Fan-Air flow rate | Heating | m³/h | | 1,746 | 2,328 | 2,910 | 1,605 | 2,408 | 3,210 | 4,013 |
| Sound pressure level | Heating | dBA | | 49 | 50 | 51 | 50 | 51 | 53 | 54 |
| Refrigerant | Type | | | R-410A | | | R-410A | | | |
| Piping connections | Liquid (OD) / Gas | | | 9.52 / 16.0 | | 9.52 / 19.0 | 9.52 / 16.0 | | 9.52 / 19.0 | |
| Required accessories (should be ordered separately) | | | | Daikin wired remote control (BRC1E52A/B or BRC1D52) | | | Daikin wired remote control (BRC1E52A/B or BRC1D52) | | | |
| Power supply | Voltage | | V | 230 | | | 230 | | | |

| | | | | Large | | | |
|---|-------------------------|------------|----|---|------------------------------|------------------------------|------------------------------|
| BIDDLE STANDARD AIR CURTAIN FOR CONNECTION TO ERQ | | | | CYQL100DK125F*BN / *SN | CYQL150DK200F*BN / *SN | CYQL200DK250F*BN / *SN | CYQL250DK250F*BN / *SN |
| Power input | Fan only | Nom. | kW | 0.75 | 1.13 | 1.50 | 1.88 |
| | Heating | Nom. | kW | 0.75 | 1.13 | 1.50 | 1.88 |
| Delta T | Inlet= room temperature | | | 15 | | 14 | 12 |
| Casing | Colour | | | BN: RAL9010 / SN: RAL9006 | | | |
| Dimensions | Height | Unit F/C/R | mm | 370 / 370 / 370 | | | |
| | Width | Unit F/C/R | mm | 1,000 / 1,000 / 1,048 | 1,500 / 1,500 / 1,548 | 2,000 / 2,000 / 2,048 | 2,500 / 2,500 / 2,548 |
| | Depth | Unit F/C/R | mm | 745 / 745 / 745 | | | |
| Required ceiling void > | | | mm | 520 | | | |
| Door height | Max. | m | | 3.0 (1) / 2.75 (2) / 2.5 (3) | 3.0 (1) / 2.75 (2) / 2.5 (3) | 3.0 (1) / 2.75 (2) / 2.5 (3) | 3.0 (1) / 2.75 (2) / 2.5 (3) |
| Door width | Max. | m | | 1.0 | 1.5 | 2.0 | 2.5 |
| Weight | Unit | kg | | 76 | 100 | 126 | 157 |
| Fan-Air flow rate | Heating | m³/h | | 3,100 | 4,650 | 6,200 | 7,750 |
| Sound pressure level | Heating | dBA | | 53 | 54 | 56 | 57 |
| Refrigerant | Type | | | R-410A | | | |
| Piping connections | Liquid (OD) / Gas | | | 9.52 / 16.0 | 9.52 / 16.0 | 9.52 / 22.0 | |
| Required accessories (should be ordered separately) | | | | Daikin wired remote control (BRC1E52A/B or BRC1D52) | | | |
| Power supply | Voltage | | V | 230 | | | |


F: Freehanging model, C: Cassette model, R: Recessed model
 (1) Favourable condition | (2) Normal condition | (3) Unfavourable condition

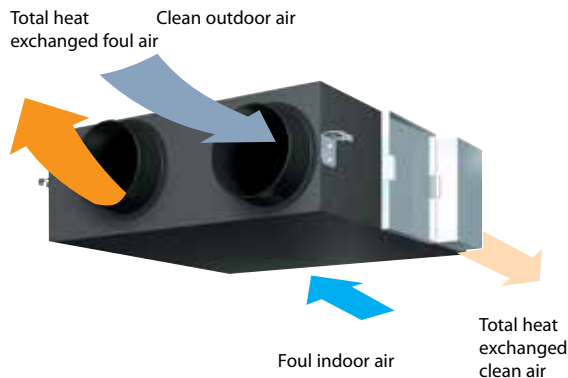

The Daikin heat reclaim ventilation system modulates the temperature and humidity of incoming fresh air to match indoor conditions. A balance is thus achieved between indoor and outdoor ambients, enabling the cooling or heating load placed on the air conditioning system to be reduced significantly. HRV units can be controlled individually or integral with the air conditioning system (Daikin VRV or Sky Air series).


- › Energy saving ventilation using indoor heating, cooling and moisture recovery
- › Ideal solution for shops, restaurants or offices requiring maximum floor space for furniture, decorations and fittings
- › Free cooling when outdoor temperature is below indoor temperature (eg. during night time)
- › Low energy consumption thanks to DC fan motor on 350 to 2000 units
- › Prevent energy losses from over-ventilation while maintaining indoor air quality with optional CO₂ sensor
- › Can be used as stand alone or integrated in the Sky Air or VRV system
- › Wide range of units: air flow rate from 150 up to 2,000 m³/h
- › Optional medium and fine dust filters M6, F7, F8 grades to meet customer request or legislation
- › Shorter installation time thanks to easy adjustment of nominal air flow rate, so less need for dampers compared with traditional installations
- › Specially developed heat exchange element with High Efficiency Paper (HEP)
- › No drain piping needed
- › Can operate in over- and under pressure
- › Total solution for fresh air with Daikin supply of both VAM and electrical heater



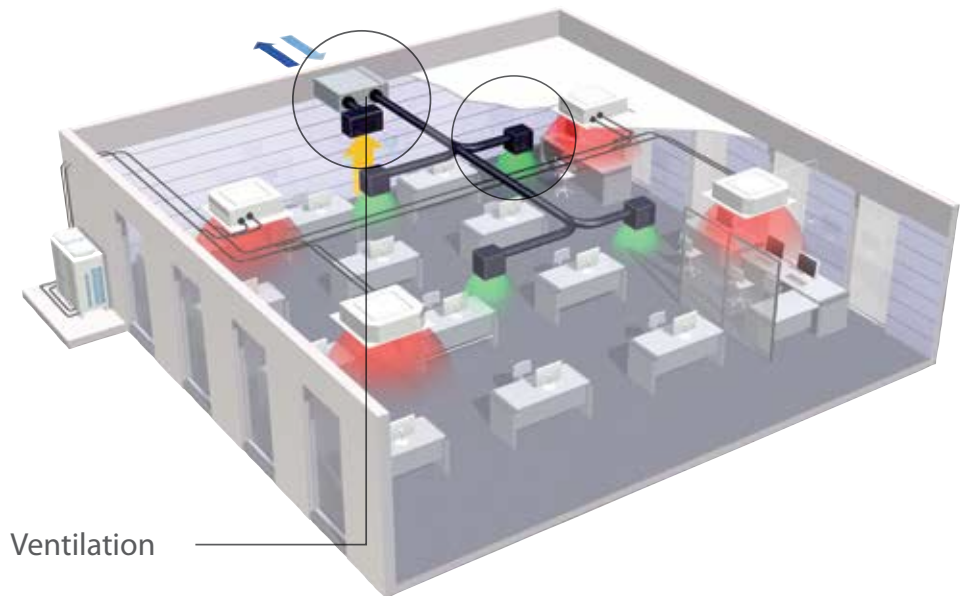

High Efficiency Paper

RH: Relative Humidity SA: Supply Air (to room) RA: Return Air (from room)

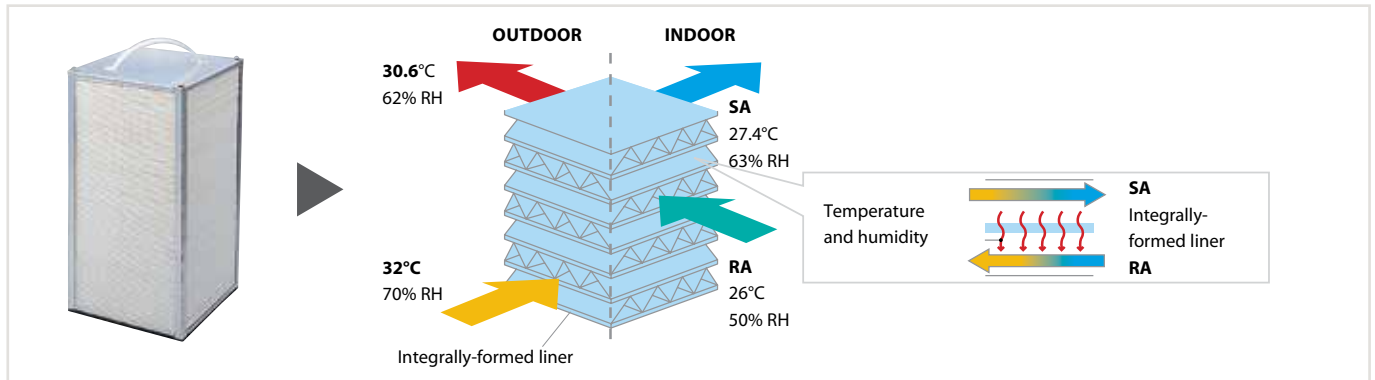

| Ventilation | | | | VAM150FA | VAM250FA | VAM350FB | VAM500FB | VAM650FB | VAM800FB | VAM1000FB | VAM1500FB | VAM2000FB | |
|--|-------------------------|---------------------|------------|--|----------------------|-------------|----------|---------------|----------|-----------------|---------------|-----------------|----------|
| Power input - 50Hz | Heat exchange mode | Nom. | Ultra high | kW | 0.116 | 0.141 | 0.132 | 0.178 | 0.196 | 0.373 | 0.375 | 0.828 | 0.852 |
| | Bypass mode | Nom. | Ultra high | kW | 0.116 | 0.141 | 0.132 | 0.178 | 0.196 | 0.373 | 0.375 | 0.828 | 0.852 |
| Temperature exchange efficiency - 50Hz | Ultra high/High/Low | | | % | 74/74/79 | 72/72/77 | 75/75/80 | 74/74/77 | 74/74/76 | 75/75/76.5 | 75/75/78 | | |
| Enthalpy exchange efficiency - 50Hz | Cooling | Ultra high/High/Low | | % | 58/58/64 | 58/58/62 | 61/61/67 | 58/58/63 | | 60/60/62 | 61/61/63 | 61/61/64 | 61/61/66 |
| | Heating | Ultra high/High/Low | | % | 64/64/69 | 64/64/68 | 65/65/70 | 62/62/67 | 63/63/66 | 65/65/67 | 66/66/68 | | 66/66/70 |
| Operation mode | | | | Heat exchange mode / Bypass mode / Fresh-up mode | | | | | | | | | |
| Heat exchange system | | | | Air to air cross flow total heat (sensible + latent heat) exchange | | | | | | | | | |
| Heat exchange element | | | | Specially processed non-flammable paper | | | | | | | | | |
| Casing | Material | | | Galvanised steel plate | | | | | | | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 285x776x525 | | 301x828x816 | | 364x1,004x868 | | 364x1,004x1,156 | 726x1,512x868 | 726x1,512x1,156 | |
| Weight | Unit | | kg | 24 | | 33 | | 52 | 55 | 64 | 131 | 152 | |
| Fan-Air flow rate - 50Hz | Heat exchange mode | Ultra high | m³/h | 150 | 250 | 350 | 500 | 650 | 800 | 1,000 | 1,500 | 2,000 | |
| | Bypass mode | Ultra high | m³/h | 150 | 250 | 350 | 500 | 650 | 800 | 1,000 | 1,500 | 2,000 | |
| Fan-External static pressure - 50Hz | Ultra high | | Pa | 69 | 64 | 98 | | 93 | 137 | 157 | 137 | | |
| Sound pressure level - 50Hz | Heat exchange mode | Ultra high | dBA | 27 / 28.5 | 28 / 29 | 32 | 33 | 34.5 | 36 | | 39.5 | 40 | |
| | Bypass mode | Ultra high | dBA | 27 / 28.5 | 28 / 29 | 32 | 33.5 | 34.5 | 36 | | 40.5 | 40 | |
| Operation range | Min. | | °CDB | -15 | | | | | | | | | |
| | Max. | | °CDB | 50 | | | | | | | | | |
| | Relative humidity | | % | 80% or less | | | | | | | | | |
| Connection duct diameter | | | mm | 100 | 150 | | 200 | | 250 | | 350 | | |
| Air filter | Type | | | Multidirectional fibrous fleeces | | | | | | | | | |
| Power supply | Phase/Frequency/Voltage | | | Hz/V | 1~/50/60/220-240/220 | | | | | | | | |
| Current | Maximum fuse amps (MFA) | | | A | 15 | | 16 | | | | | | |

Total solution for fresh air with Daikin supply of both VAM and electrical heaters

- › Increased comfort in low outdoor temperature thanks to the heated outdoor air
- › Integrated electrical heater concept (no additional accessories required)
- › Standard dual flow and temperature sensor
- › Flexible setting with adjustable setpoint
- › Increased safety with 2 cut-outs: manual & automatic
- › BMS integration thanks to:
 - Volt free relay for error indication
 - 0-10VDC input for setpoint control
- › Capacities ranging from 1 to 2.5 kW




VH Electrical heater for VAM

Daikin Air handling units

Wide range of air flows

In situations where the Daikin commercial range of ventilation units cannot satisfy the ventilation requirement due to building constraints (large atriums, banquet halls, etc) air handling units represent the ideal solution. Daikin's wide range of air handling systems handle air flow rates from 500 m³/h up to 140,000 m³/h. The air handler unit can be adapted to deliver whatever air flow you require, via the specific dimensions of flow section available at the installation.

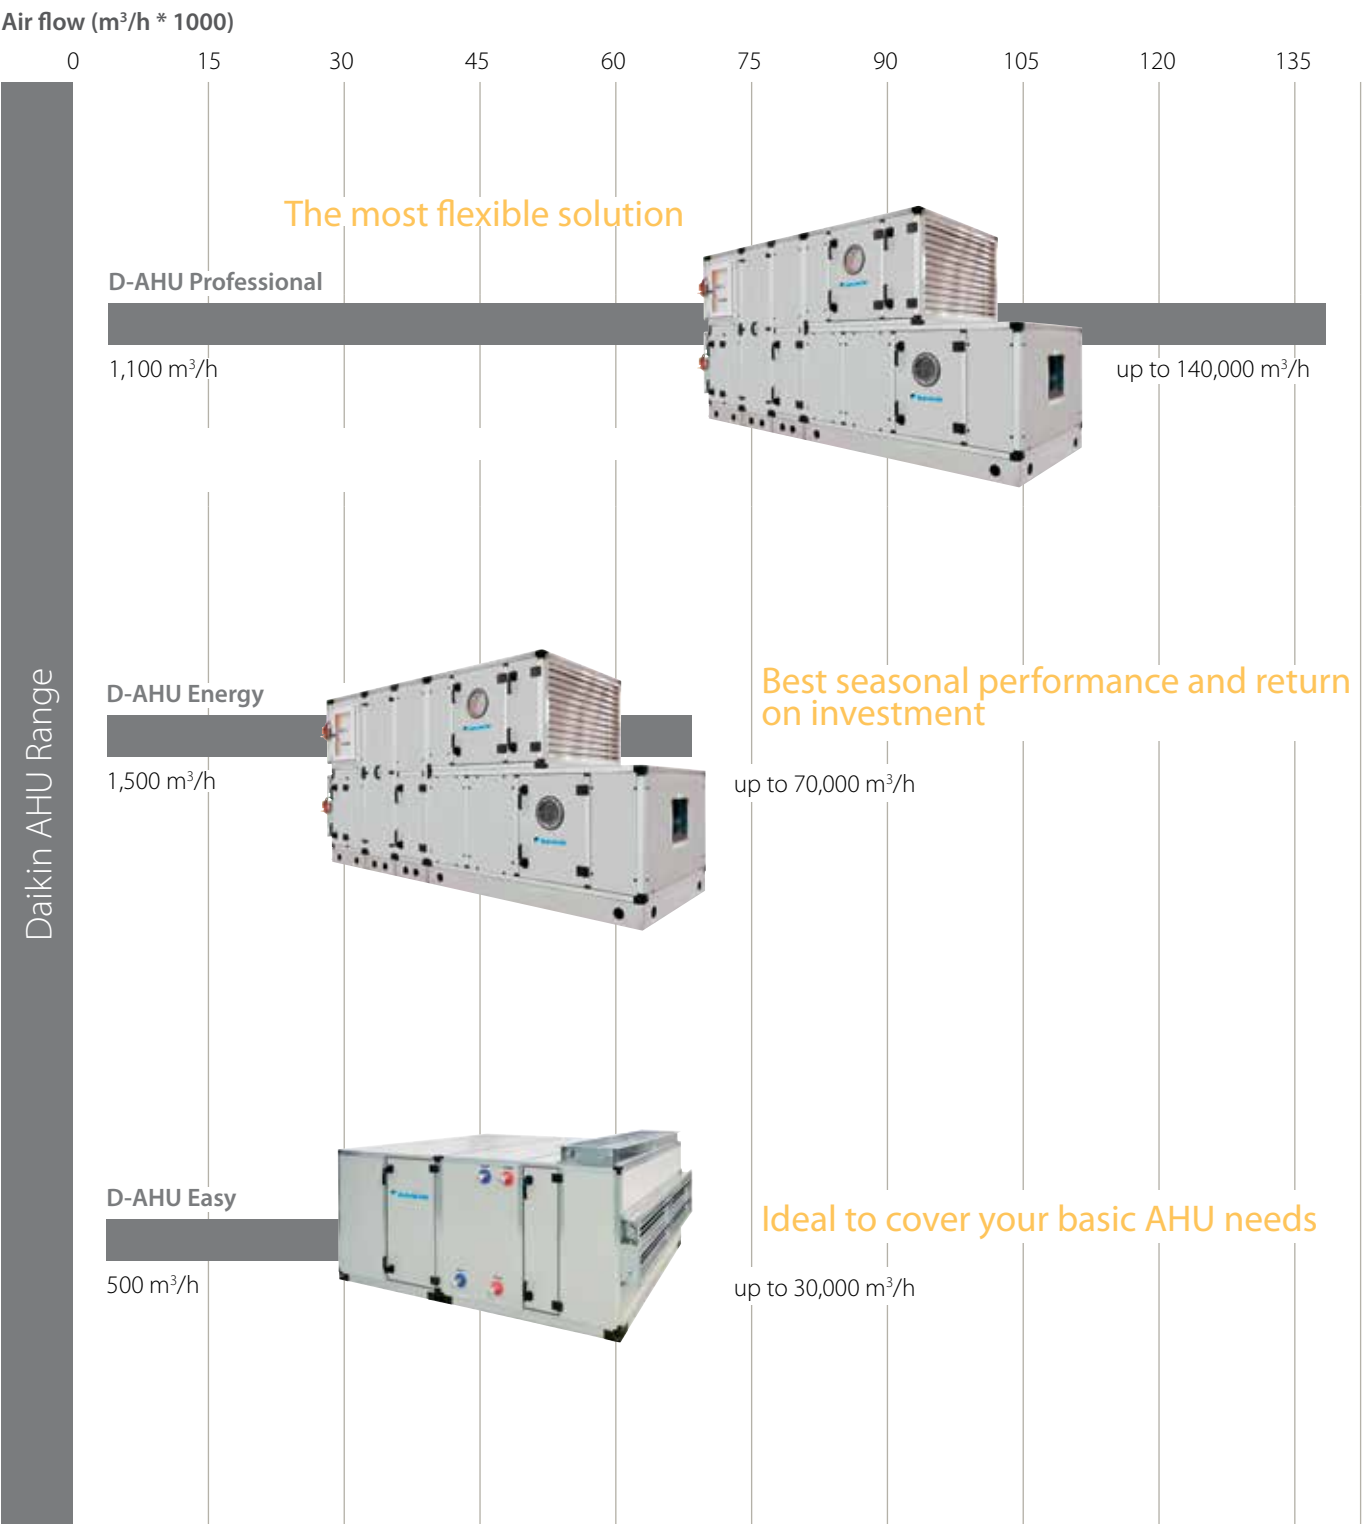

Daikin fresh air package - plug & play

The D-AHU Professional and Energy series provide a complete solution including unit control (EKEXV, EKEQ, DDC controller) factory mounted and configured, plug & play with our ERQ and VRV condensing units.

The easiest solution as you save time and only have one point of contact!

Return on investment

The air handling unit (AHU) is critical to an effective climate control system and, although the initial investment can appear high, the savings generated by our advanced designs and operating efficiencies guarantee a rapid return on the investment made. Our AHU Energy series has been designed to deliver exceptional performance thus driving down the energy consumed and so lowering energy bills. Taken over the expected 15-year life-span of the equipment, this will result in a substantial saving, especially in a time of ever increasing energy prices.

Pre-defined sizes

27 fixed sizes are available, optimized to reach the best compromise between competitiveness and manufacturing standardisation. However, Daikin's section by section design means that units can be sized by 1 cm increments and assembled on site, without welding, to suit the space constraints of the installation.

High efficiency components

All Daikin air handlers have been designed for optimum energy efficiency. Polyurethane or Mineral wool panels guarantee excellent thermal insulation performance. Filters are provided with a large choice of efficiency filtration class.



ASTRA is the powerful software that Daikin has developed to offer a quick and comprehensive service for the customer in order to make the technical choice and the economic valorization of each AHU. It is a complete tool that can configure any type of product and respond exactly to the strictest design needs. The result is a comprehensive economic offer including all the technical data and drawings, the psychrometric diagram with the relative air treatment and the fans' performance curves.

The ASTRA software features a specific DX heat pump coil section able to calculate cooling and heating performances with the automatic selection of the appropriate Daikin expansion valve.

Why use ERQ for connection to air handling units?

High Efficiency

Daikin heat pumps are renowned for their high energy efficiency with COPs up to 4.56 in heating¹.

1 ERQ100AV1 heat pump

High Comfort Levels

Daikin ERQ units respond rapidly to fluctuations in the supply air temperature, resulting in a steady indoor temperature, together with the dehumidification this results in high comfort levels for the end user.

Easy Design and Installation

The system is easy to design and install since no additional water systems such as boilers, tanks and gas connections etc are required. This also reduces the total system cost.

Flexible control options

In order to maximize installation flexibility, 3 types of control systems are offered.

Control x:

Control of air temperature (discharge temperature, suction temperature, room temperature) via external device (DDC controller)

Control y:

Control of evaporating temperature via Daikin control (no DDC controller needed)

Control z:

Control of air temperature (suction temperature, room temperature) via Daikin control (no DDC controller needed)


Flexible control possibilities for air handling applications

In order to maximise installation flexibility, 3 types of control systems are offered:

Possibility X (Td/Tr control):

Air temperature control via DDC controller


Room temperature is controlled as a function of the air handling unit suction or discharge air (customer selection). The DDC controller is translating the temperature difference between set point and air suction temperature (or air discharge temperature or room temperature) into a reference voltage (0-10V) which is transferred to the Daikin control box (EKEQFCBA). This reference voltage will be used as the main input value for the compressor frequency control.

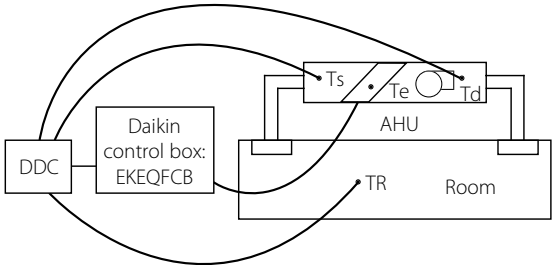

Possibility Y (Te/Tc control):

By fixed evaporating temperature

A fixed target evaporating temperature of between 3°C and 8°C can be set by the customer. In this case, room temperature is only indirectly controlled. The cooling load is determined from the actual evaporating temperature (i.e. load to the heat exchanger). A Daikin wired remote controller (BRC1D52 or BRC1E52A/B - optional) can be connected for error indication.

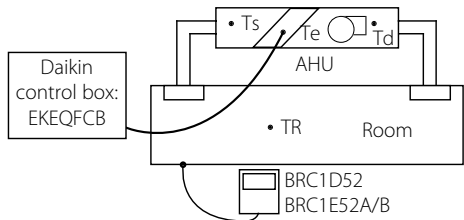


Possibility Z (TS/Tr control):

Using Daikin wired remote controller (BRC1D52 or BRC1E52A/B - optional)

Set point can be fixed via standard Daikin wired remote controller. Remote ON/OFF can be achieved by an optional adapter KRP4A51.

No external DDC controller should be connected. The cooling load is determined from the air suction temperature and set point on the Daikin controller.

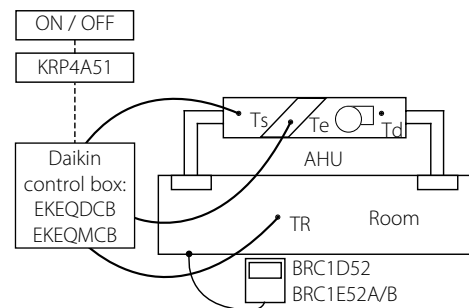

Ts = Air suction temperature
Td = Air discharge temperature
Tr = Room temperature
Te = Evaporating temperature
AHU = Air Handling Unit
DDC = Digital Display Controller


| | OPTION KIT | FEATURES |
|---------------|---------------------|---|
| Possibility x | EKEQFCB | DDC controller is required Temperature control using air suction or air discharge temperature |
| Possibility y | | Using fixed evaporating temperature, no set point can be set using remote controller |
| Possibility z | EKEQDCB EKEQMCB* | Using Daikin wired remote controller BRC1D52 or BRC1E52A/B Temperature control using air suction temperature |

* EKEQMCB (for 'multi' application)

A range of R-410A inverter condensing units for pair application with air handling units.

- › Inverter controlled units
- › Large capacity range (from 100 to 250 class)
- › Heat pump
- › R-410A
- › Wide range of expansion valve kits available
- › Up to 4 ERQ units can be connected to an interlaced coil in one air handling unit

The “Daikin Fresh Air Package” provides a complete Plug & Play Solution including AHU, ERQ or VRV Condensing Unit and all unit control (EKEQ, EKEX, DDC controller) factory mounted and configured. The easiest solution with only one point of contact.

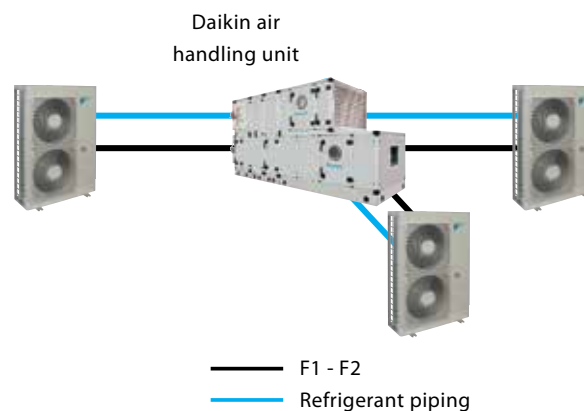

| VENTILATION | | | | ERQ100AV1 | ERQ125AV1 | ERQ140AV1 |
|----------------------|-------------------------|--------------------|---------------------|----------------|-----------|-----------|
| Capacity range | | | HP | 4 | 5 | 6 |
| Cooling capacity | Nom. | | kW | 11.2 | 14.0 | 15.5 |
| Heating capacity | Nom. | | kW | 12.5 | 16.0 | 18.0 |
| Power input | Cooling | Nom. | kW | 2.81 | 3.51 | 4.53 |
| | Heating | Nom. | kW | 2.74 | 3.86 | 4.57 |
| EER | | | | 3.99 | | 3.42 |
| COP | | | | 4.56 | 4.15 | 3.94 |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,345x900x320 | | |
| Weight | Unit | | kg | 120 | | |
| Fan-Air flow rate | Cooling | Nom. | m ³ /min | 106 | | |
| | Heating | Nom. | m ³ /min | 102 | 105 | |
| Sound power level | Cooling | Nom. | dBA | 66 | 67 | 69 |
| Sound pressure level | Cooling | Nom. | dBA | 50 | 51 | 53 |
| | Heating | Nom. | dBA | 52 | 53 | 55 |
| Operation range | Cooling | Min./Max. | °CDB | -5/46 | | |
| | Heating | Min./Max. | °CWB | -20/15.5 | | |
| | On coil temperature | Heating | Min. | 10 | | |
| | | Cooling | Max. | 35 | | |
| Refrigerant | Type | | | R-410A | | |
| Piping connections | Liquid | OD | mm | 9.52 | | |
| | Gas | OD | mm | 15.9 | | 19.1 |
| | Drain | OD | mm | 26x3 | | |
| Power supply | Phase/Frequency/Voltage | | Hz/V | 1N~/50/220-240 | | |
| Current | Maximum fuse amps (MFA) | | A | 32.0 | | |

| VENTILATION | | | | ERQ125AW1 | ERQ200AW1 | ERQ250AW1 |
|----------------------|-------------------------|--------------------|---------------------|---------------|---------------|-----------|
| Capacity range | | | HP | 5 | 8 | 10 |
| Cooling capacity | Nom. | | kW | 14.0 | 22.4 | 28.0 |
| Heating capacity | Nom. | | kW | 16.0 | 25.0 | 31.5 |
| Power input | Cooling | Nom. | kW | 3.52 | 5.22 | 7.42 |
| | Heating | Nom. | kW | 4.00 | 5.56 | 7.70 |
| EER | | | | 3.98 | 4.29 | 3.77 |
| COP | | | | 4.00 | 4.50 | 4.09 |
| Dimensions | Unit | HeightxWidthxDepth | mm | 1,680x635x765 | 1,680x930x765 | |
| Weight | Unit | | kg | 159 | 187 | 240 |
| Fan-Air flow rate | Cooling | Nom. | m ³ /min | 95 | 171 | 185 |
| | Heating | Nom. | m ³ /min | 95 | 171 | 185 |
| Sound power level | Nom. | | dBA | 72 | 78 | |
| Sound pressure level | Nom. | | dBA | 54 | 57 | 58 |
| Operation range | Cooling | Min./Max. | °CDB | -5/43 | | |
| | Heating | Min./Max. | °CWB | -20/15 | | |
| | On coil temperature | Heating | Min. | 10 | | |
| | | Cooling | Max. | 35 | | |
| Refrigerant | Type | | | R-410A | | |
| Piping connections | Liquid | OD | mm | 9.52 | | |
| | Gas | OD | mm | 15.9 | 19.1 | 22.2 |
| Power supply | Phase/Frequency/Voltage | | Hz/V | 3N~/50/400 | | |
| Current | Maximum fuse amps (MFA) | | A | 16 | 25 | |

Overview of expansion valves and control boxes

Daikin also offers a range of expansion valve kits and control boxes to connect ERQ to third party air handling units.

ERQ combination table

| OUTDOOR UNIT | | EXPANSION VALVE KIT | | | | | | |
|--------------|-----------|---------------------|----------|-----------|-----------|-----------|-----------|-----------|
| | | CLASS 63 | CLASS 80 | CLASS 100 | CLASS 125 | CLASS 140 | CLASS 200 | CLASS 250 |
| | | EKEXV63 | EKEXV80 | EKEXV100 | EKEXV125 | EKEXV140 | EKEXV200 | EKEXV250 |
| 1~ | ERQ100AV1 | P | P | P | P | - | - | - |
| | ERQ125AV1 | P | P | P | P | P | - | - |
| | ERQ140AV1 | - | P | P | P | P | - | - |
| 3~ | ERQ125AW1 | P | P | P | P | P | - | - |
| | ERQ200AW1 | - | - | P | P | P | P | P |
| | ERQ250AW1 | - | - | - | P | P | P | P |

P: Pair. Combination depending on air handling units coils volume.



EKEXV - Expansion valve kit for air handling applications

| VENTILATION | | | | | EKEXV50 | EKEXV63 | EKEXV80 | EKEXV100 | EKEXV125 | EKEXV140 | EKEXV200 | EKEXV250 |
|----------------------|---------------------|--------------------|------|------|------------|---------|---------|----------|----------|----------|----------|----------|
| Dimensions | Unit | HeightxWidthxDepth | mm | | 401x215x78 | | | | | | | |
| Weight | Unit | | | kg | 2.9 | | | | | | | |
| Sound pressure level | Nom. | | | dBA | 45 | | | | | | | |
| Operation range | On coil temperature | Heating | Min. | °CDB | 10 (1) | | | | | | | |
| | | Cooling | Max. | °CDB | 35 (2) | | | | | | | |
| Refrigerant | Type | | | | R-410A | | | | | | | |
| Piping connections | Liquid | OD | mm | | 6.35 | 9.52 | | | | | | |
| | Gas | OD | mm | | 6.35 | 9.52 | | | | | | |

(1) The temperature of the air entering the coil in heating mode can be reduced to -5°CDB. Contact your local dealer for more information. (2) 45% Relative humidity.



EKEQ - Control box for air handling applications

| VENTILATION | | | | EKEQFCB | | EKEQDCB | |
|--------------|-------------------------|--------------------|------|-------------|--|---------|--|
| Application | | | | Pair | | | |
| Outdoor unit | | | | ERQ | | | |
| Dimensions | Unit | HeightxWidthxDepth | mm | 132x400x200 | | | |
| Weight | Unit | kg | | 3.9 | | 3.6 | |
| Power supply | Phase/Frequency/Voltage | | Hz/V | 1~/50/230 | | | |





Control systems

| | |
|---|-----------|
| Individual control systems | 68 |
| Wired / infrared remote control | 70 |
| Control systems Siesta Sky Air | 70 |
| Centralised control systems | 74 |
| Centralised remote control / | |
| Unified ON/OFF control / Schedule timer | 74 |
| DTA113B51 | 75 |
| intelligent touch Controller | 75 |
| Management control | 78 |
| intelligent touch Manager | 76 |
| Standard protocol interfaces | 80 |
| KNX Interface | 80 |
| BACnet Interface | 81 |
| LonWorks Interface | 81 |

Sensors & other devices

| | |
|---|----|
| Wireless room temperature sensor | 82 |
| Wired room temperature sensor | 82 |
| Other intergration devices | 83 |
| Specifications : Ventilation, condensing units & AHU application | 84 |

Option lists

| | |
|--|----|
| Ventilation, condensing units & AHU application | 86 |
| Sky Air | 86 |



BRC1D52



BRC944B2



ARC466A1



BRC4*/BRC7*



BRC2C51



BRC3A61

BRC944B2*/BRC1D52

Wired remote control

- > Schedule timer:
 - Five day actions can be set as follows:
 - set point: unit is switched ON and normal operation is maintained
 - OFF: unit is switched OFF¹
 - limits: unit is switched ON and min./max. control (cf. limit operation for more details)
- > Home leave (frost protection): during absence, the indoor temperature can be maintained at a certain level.
This function can also switch the unit ON/OFF
- > User friendly HRV function, thanks to the introduction of a button for ventilation mode and fan speed
- > Constantly monitoring of the system for malfunctions in a total of 80 components
- > Immediate display of fault location and condition
- > Reduction of maintenance time and costs

Display

- > Operating mode¹
- > Heat Recovery Ventilation (HRV) in operation
- > Cool / heat changeover control
- > Centralised control indication
- > Group control indication
- > Set temperature¹
- > Air flow direction¹
- > Programmed time
- > Inspection test / operation
- > Fan speed¹
- > Clean air filter
- > Defrost / hot start
- > Malfunction

¹ Only functions marked with '1' are available on BRC944B2

ARC4*/BRC4*/BRC7*

Infrared remote control

Operation buttons: ON/OFF, timer mode start/stop, timer mode on / off, programme time, temperature setting, air flow direction (1), operating mode, fan speed control, filter sign reset (2), inspection (2)/test indication (2)
Display: Operating mode, battery change, set temperature, air flow direction (1), programmed time, fan speed, inspection/test operation (2)

1. Not applicable for FXDQ, FXSQ, FXNQ, FBDQ, FDXS, FBQ
2. For FX** units only
3. For all features of the remote control, refer to the operation manual

BRC3A61

Simplified built-in remote control for hotel applications

Compact, user friendly unit, ideal for use in hotel bedrooms

Operation buttons: ON/OFF, fan speed control, temperature setting

Display: Heat Recovery Ventilation (HRV) in operation, set temperature, operating mode, centralised control indication, fan speed, defrost/hot start, malfunction

BRC2C51

Simplified remote control

Simple, compact and easy to operate unit, suitable for use in hotel bedrooms

Operation buttons: ON/OFF, operating mode selection, fan speed control, temperature setting

Display: Cool/heat changeover control, Heat Recovery Ventilation (HRV) in operation, set temperature, operating mode, centralised control indication, fan speed, defrost/hot start, malfunction adjustment, operating mode selection, fan speed control, filter sign reset, inspection test/operation

NEW

Simplified wired remote control developed for hotel applications

- > Symbol driven interface for intuitive control
- > Functions restricted to basic customer needs
- > Contemporary design
- > Energy saving thanks to set point limitation
- > Flat backpanel for easy installation
- > 2 versions available:
 - Heat pump type: temperature, fan speed, ON/OFF
 - Heat recovery type: temperature, mode, fan speed, ON/OFF
- > Replaces existing BRC2C51 & BRC3A61
- > Available spring 2014



Save energy

A series of energy saving functions that can be individually selected

- > Temperature range limit
- > Setback function
- > Presence & floor sensor connection
(available on new round flow cassette)
- > kWh indication
- > Set temperature auto reset
- > Off timer

Temperature range limit avoids excessive heating or cooling

Save energy by constraining the lower temperature limit in cooling and upper temperature limit in heating mode.

note : Also available in auto cooling/heating change over mode.

kWh indication keeps track of your consumption

The kWh indication shows an indicative electricity consumption of the last day/month/year.

Other functions

- > Up to 3 independent schedules can be set, so the user can easily change the schedule himself throughout the year (e.g. Summer, winter, mid-season)
- > Possibility to individually restrict menu functions
Easy to use: all main functions directly accessible
- > Easy setup: clear graphical user interface for advanced menu settings
- > Real time clock with auto update to daylight saving time
- > Built-in backup power: when a power failure occurs all settings remain stored up to 48 hours
- > Supports multiple languages
 - English, German, Dutch, Spanish, Italian, Portuguese, French, Greek, Russian, Turkish, Polish (BRC1E52A)
 - English, German, Czech, Croatian, Hungarian, Romanian, Slovenian, Bulgarian, Slovak, Serbian, Albanian (BRC1E52B)


Graphical display of indicative electricity consumption
(function available in combination with FCQG and FCQHG)



Overview controllers for Siesta Sky Air

| Siesta Sky Air indoor units | Controllers |
|--|---|
| ACQ-C 4-way blow, ceiling mounted cassette | <ul style="list-style-type: none"> - Standard infrared remote control (ARCWLA) in box of decoration panel ADP125A - Optional wired remote control ARCWL B - Optional group controller R04084124324 |
| AHQ-C ceiling suspended | <ul style="list-style-type: none"> - Standard infrared remote control in box of indoor unit ARCWLA - Optional wired remote control ARCWB - Optional group controller R04084124324 |
| ABQ-C concealed ceiling | <ul style="list-style-type: none"> - Standard wired remote control (ARCWB) in box of indoor unit - Optional group controller R04084124324 |

Overview of features

| Feature | | | ARCWB |
|---------|---|---|--|
| | | | Option for AHQ-C and ACQ-C Standard for ABQ-C |
| | | |  |
| 1 | ON/OFF switch | | Standard |
| 2 | Temperature setting | Default range 16-30°C | Standard |
| | | Optional range 20-30°C | By dipswitch selection |
| | | Switch between °C and °F | Standard |
| 3 | Room temperature sensor on remote control | | Standard |
| 4 | Cool / Fan dry / Heat / Auto | | Standard |
| 5 | Sleep mode | | Standard |
| 6 | Fan Speed selection | | Standard |
| 7 | Delay timer | | 1, 2 & 4 hours delay |
| 8 | 7-days programmable timer | | Standard |
| 9 | Real time clock display | | Standard |
| 10 | Air swing selection | ON/OFF swing mode | Standard |
| | | Change swing option (draft/soil prevention or standard) | Standard |
| 11 | LCD display without backlight | | Standard |
| 12 | Key lock | | Standard |
| 13 | Error code indication | | Standard |
| 14 | IR receiver to enable compatibility with infrared remote control (disabled when lock function is activated) | | Standard |
| 15 | Last state memory from indoor PCB | | Standard |
| 16 | Silent mode | | By dipswitch selection |
| 17 | Turbo mode | | By dipswitch selection |
| 18 | Compressor test model (compressor force ON) | | Standard |
| 19 | Daikin inverter error code | | Standard |
| 20 | UART communication port (for Daikin protocol) | | Standard |
| 21 | Backup battery | | Standard |

Specifications

Dimensions (length x width x height) ARCWLA: 0.15 m x 0.21 m x 0.04 m.

ARCWB comes standard with a 10 meter wire, which can be extended to maximum wire length of 15 meter.

ARCWB can only control **one indoor unit** at a time; group control is only possible when using option R04084124324.



Integration of RA, Sky Air, VRV and AHU in BMS or home automation systems



RTD-RA

- › Modbus interface for monitoring and control of residential indoor units

RTD-NET

- › Modbus interface for monitoring and control of Sky Air, VRV, VAM and VKM

RTD-10

- › Advanced integration into BMS of Sky Air, VRV, VAM and VKM through either:
 - Modbus
 - Voltage (0-10V)
 - Resistance
- › Duty/standby function for server rooms






RTD-20

- › Advanced control of Sky Air, VRV, VAM/VKM and air curtains
- › Clone or independent zone control
- › Increased comfort with integration of CO₂ sensor for fresh air volume control
- › Save on running costs via
 - pre/post and trade mode
 - set point limitation
 - overall shut down
 - PIR sensor for adaptive deadband

RTD-HO

- › Modbus interface for monitoring and control of Sky Air, VRV, VAM and VKM
- › Intelligent hotel room controller

Overview functions

| | | |  |  |  |  |  |
|--|-----------|----|---|---|--|---|---|
| Main functions | | | RTD-RA | RTD-NET | RTD-10 | RTD-20 | RTD-HO |
| Dimensions | H x W x D | mm | 80 x 80 x 37,5 | 100 x 100 x 22 | | | |
| Key card + window contact | | | | | | | ✓ |
| Set back function | | | ✓ | | | | ✓ |
| Prohibit or restrict remote control functions (setpoint limitation, ...) | | | ✓ | ✓ | ✓ | ✓** | ✓ |
| Modbus (RS485) | | | ✓ | ✓ | ✓ | ✓ | ✓ |
| Group control | | | ✓(1) | ✓ | ✓ | ✓ | ✓ |
| 0 - 10 V control | | | | | ✓ | ✓ | |
| Resistance control | | | | | ✓ | ✓ | |
| IT application | | | ✓ | | ✓ | | |
| Heating interlock | | | | | ✓ | ✓ | |
| Output signal (on/defrost, error) | | | | | ✓ | ✓**** | ✓ |
| Retail application | | | | | | ✓ | |
| Partitioned room control | | | | | | ✓ | |
| Air curtain | | | | ✓*** | ✓*** | ✓ | |

(1): By combining RTD-RA devices

| Control functions | RTD-RA | RTD-NET | RTD-10 | RTD-20 | RTD-HO |
|-----------------------------|--------|---------|--------|--------|--------|
| On/Off | M,C | M | M,V,R | M | M* |
| Set point | M | M | M,V,R | M | M* |
| Mode | M | M | M,V,R | M | M* |
| fan | M | M | M,V,R | M | M* |
| Louver | M | M | M,V,R | M | M* |
| HRV Damper control | | M | M,V,R | M | |
| Prohibit/Restrict functions | M | M | M,V,R | M | M* |
| Forced thermo off | M | | | | |

| Monitoring functions | RTD-RA | RTD-NET | RTD-10 | RTD-20 | RTD-HO |
|---|--------|---------|--------|--------|--------|
| On/Off | M | M | M | M | M |
| Set point | M | M | M | M | M |
| Mode | M | M | M | M | M |
| fan | M | M | M | M | M |
| Louver | M | M | M | M | M |
| RC temperature | | M | M | M | M |
| RC mode | | M | M | M | M |
| nbr units | | M | M | M | M |
| Fault | M | M | M | M | M |
| Fault code | M | M | M | M | M |
| Return air temperature (Average /Min/Max) | M | M | M | M | M |
| Filter alarm | | M | M | M | M |
| Termo on | M | M | M | M | M |
| Defrost | | M | M | M | M |
| Coil In/Out temperature | M | M | M | M | M |

M : Modbus / R : Resistance / V : Voltage / C: control
 * : only when room is occupied / ** : setpoint limitation / (*) if available
 *** : no fan speed control on the CYV air curtain / **** : run & fault

Centralised control systems



DCS302C51



DCS301B51



DST301B51



Centralised control of the Sky Air and VRV system can be achieved via 3 user friendly compact controls: centralised remote control, unified on/off control and schedule timer. These controls may be used independently or in combination where 1 group = several (up to 16) indoor units in combination and 1 zone = several groups in combination.

A centralised remote control is ideal for use in tenanted commercial buildings subject to random occupation, enabling indoor units to be classified in groups per tenant (zoning).

The schedule timer programmes the schedule and operation conditions for each tenant and the control can easily be reset according to varying requirements.

DCS302C51

Centralised remote control

Providing individual control of 64 groups (zones) of indoor units.

- a maximum of 64 groups (128 indoor units, max. 10 outdoor units) can be controlled
- a maximum of 128 groups (128 indoor units, max. 10 outdoor units) can be controlled via 2 centralised remote controls in separate locations
- zone control
- group control
- malfunction code display
- maximum wiring length of 1,000m (total: 2,000m)
- air flow direction and air flow rate of HRV can be controlled
- expanded timer function

DCS301B51

Unified ON/OFF control

Providing simultaneous and individual control of 16 groups of indoor units.

- a maximum of 16 groups (128 indoor units) can be controlled
- 2 remote controls in separate locations can be used
- operating status indication (normal operation, alarm)
- centralised control indication
- maximum wiring length of 1,000m (total: 2,000m)

DST301B51


Schedule timer

Enabling 64 groups to be programmed.

- a maximum of 128 indoor units can be controlled
- 8 types of weekly schedule
- a maximum of 48 hours back up power supply
- a maximum wiring length of 1,000m (total: 2,000m)

Basic solution for control of Sky Air and VRV


- › Rotation function
- › Backup operation function.

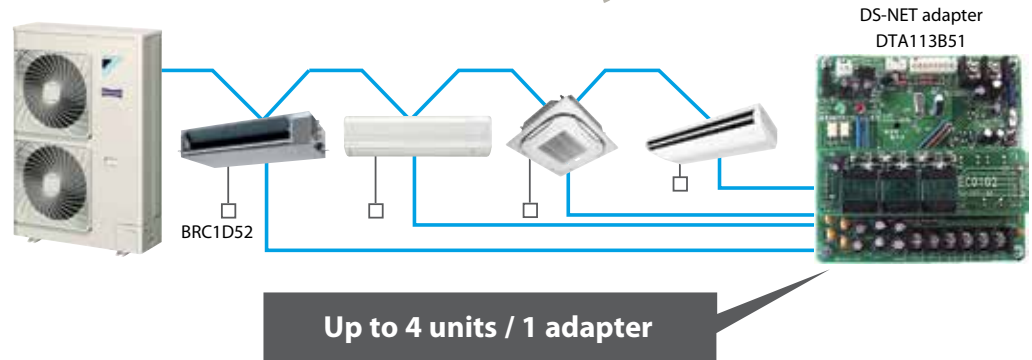

DCS601C51

Intelligent Controller

Detailed & easy monitoring and operation of VRV systems (max. 64 indoor units groups)

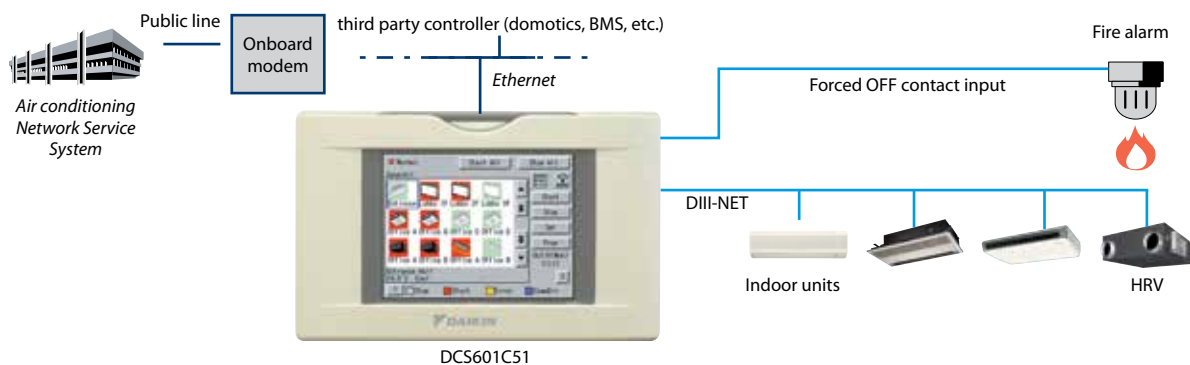

Languages

- › English
- › French
- › German
- › Italian
- › Spanish
- › Dutch
- › Portuguese

System layout

- › Up to 64 indoor units can be controlled
- › Touch panel (full colour LCD via icon display)

Management

- › Easy management of electricity consumption
- › Enhanced history function

Control

- › Individual control (set point, start/stop, fan speed) (max. 64 groups/indoor units)
- › Set back schedule
- › Enhanced scheduling function (8 schedules, 17 patterns)
- › Flexible grouping in zones
- › Yearly schedule
- › Fire emergency stop control
- › Interlocking control
- › Increased HRV monitoring and control function
- › Automatic cooling / heating change-over
- › Heating optimization
- › Temperature limit
- › Password security: 3 levels (general, administration & service)
- › Quick selection and full control
- › Simple navigation

Monitoring

- › Visualisation via Graphical User Interface (GUI)
- › Icon colour display change function
- › Indoor units operation mode
- › Indication filter replacement
- › Multi PC

Cost performance

- › Free cooling function
- › Labour saving
- › Easy installation
- › Compact design: limited installation space
- › Overall energy saving

Open interface

- › Communication to any third party controller (domotics, BMS, etc.) is possible via open interface (http option)

Connectable to

- › VRV
- › HRV
- › Sky Air
- › Split (via interface adapter)


New Mini Building Management System



Mini BMS with full integration across all product pillars

- ✓ Price competitive mini BMS
- ✓ Cross-pillar integration of Daikin products
- ✓ Integration of third party equipment

System overview

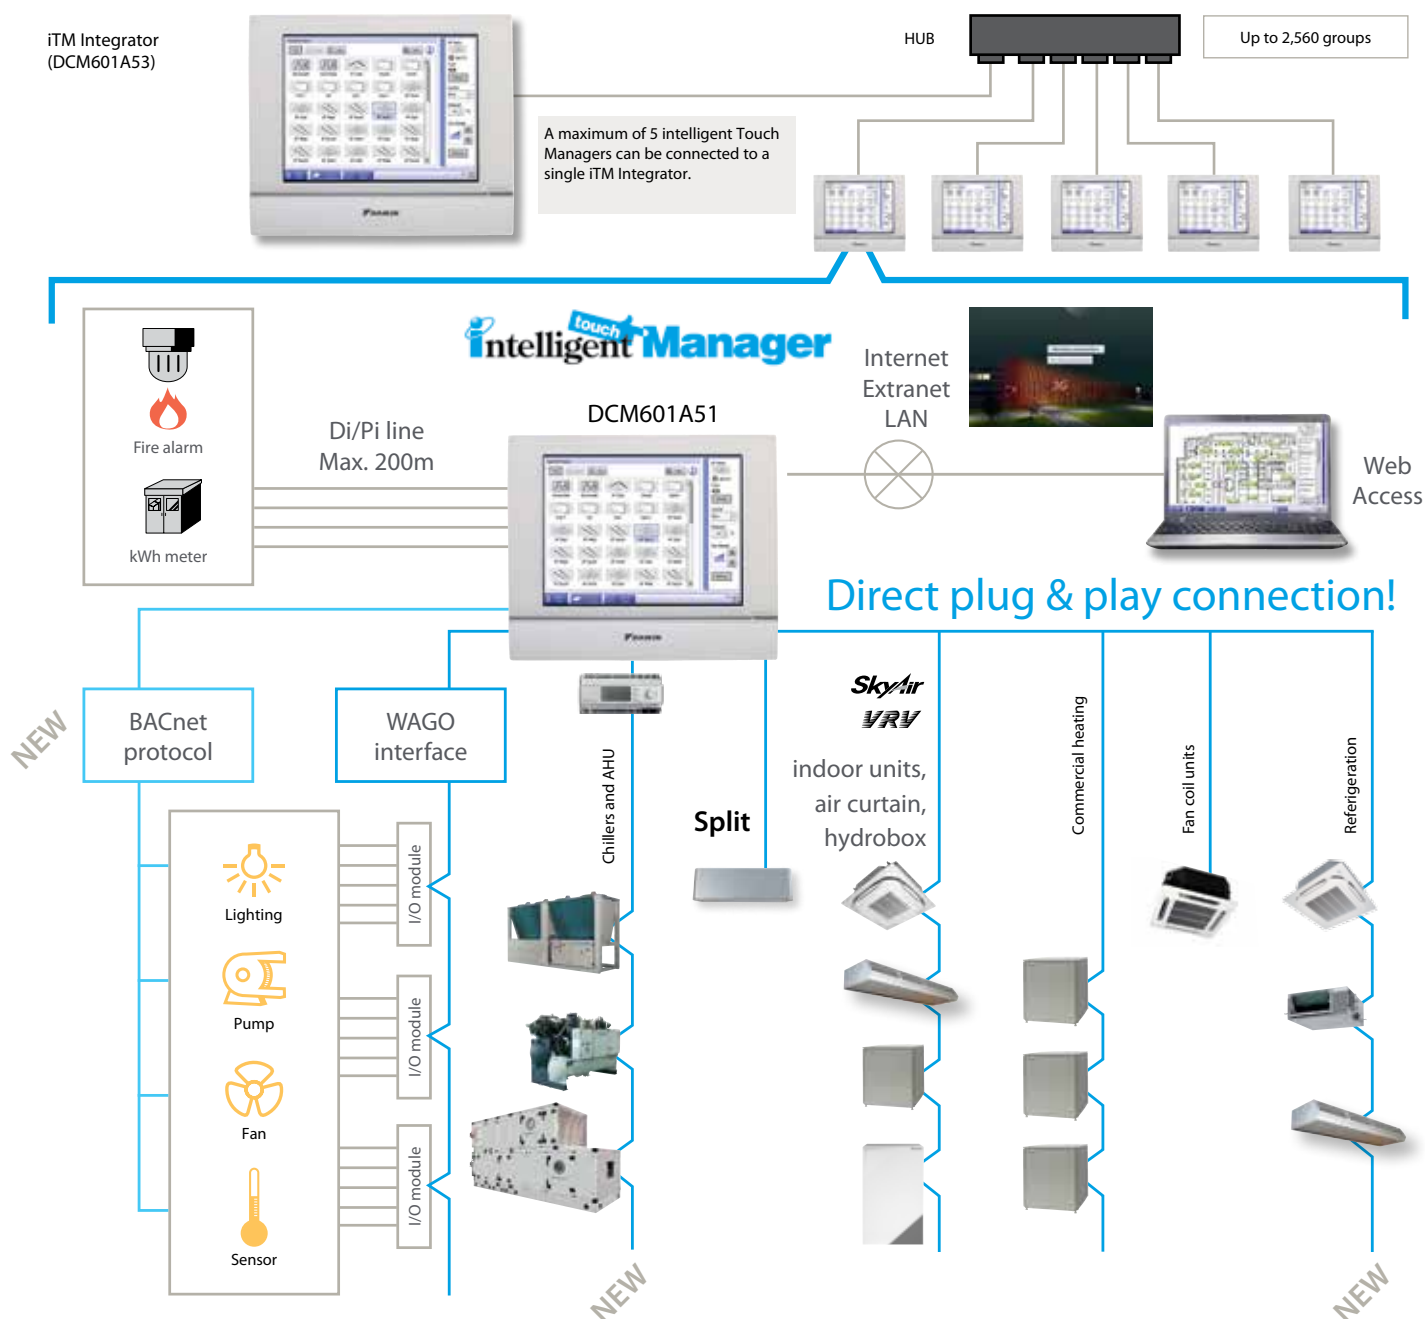

User friendliness

- › Intuitive user interface
- › Visual lay out view and direct access to indoor unit main functions
- › All functions direct accessible via touch screen or via web interface



Smart energy management

- › Monitoring if energy use is according to plan
- › Helps to detect origins of energy waste
- › Powerful schedules guarantee correct operation throughout the year
- › Save energy by interlocking A/C operation with other equipment such as heating



Flexibility

- › Cross-pillar integration (heating, air conditioning, applied systems, refrigeration)
- › BACnet protocol for 3rd party products integration
- › I/O for integration of equipment such as lights, pumps... on WAGO modules
- › Modular concept for small to large applications
- › Control up to 2,560 indoor unit groups



Easy servicing and commissioning

- › Remote refrigerant containment check preventing on site visit
- › Simplified troubleshooting
- › Save time on commissioning thanks to the pre-commissioning tool
- › Auto registration of indoor units

Functions overview



DCM601A51

Languages

- › English
- › French
- › German
- › Italian
- › Spanish
- › Dutch
- › Portuguese

System layout

- › Up to 2,560 unit groups can be controlled (ITM plus Integrator + 7 iPU (incl. iTM adaptor))
- › Ethernet TCP/IP

Management

- › Web access
- › Power Proportional Distribution (option)
- › Operational history (malfunctions, operation hours, ...)
- › Smart energy management
 - › - monitor if energy use is according to plan
 - › - detect origins of energy waste
- › Setback function
- › Sliding temperature

Control

- › Individual control (2,560 groups)
- › Schedule setting (Weekly schedule, yearly calendar, seasonal schedule)
- › Interlock control
- › Setpoint limitation
- › Temperature limit

WAGO Interface

- › Modular integration of 3rd party equipment
 - WAGO coupler (interface between WAGO and Modbus)
 - Di module
 - Do module
 - Ai module
 - Thermistor module

Connectable to

- DX Split, Sky Air, VRV
- Chillers (via POL638.70 controller)
- Daikin AHU
- Fan coils
- Daikin Altherma Flex type
- LT and HT hydroboxes
- Air curtains
- WAGO I/O
- BACnet protocol

Integration of Sky Air and VRV in HA/BMS systems


Connect Sky Air / VRV indoor units to KNX interface for BMS integration



KNX interface line-up

The integration of Daikin indoor units through the KNX interface allows monitoring and control of several devices, such as lights and shutters, from one central controller. One particularly important feature is the ability to programme a ‘scenario’ - such as “Home leave” - in which the end-user selects a range of commands to be executed simultaneously once the scenario is selected. For instance in “Home leave”, the air conditioner is off, the lights are turned off, the shutters are closed and the alarm is on.

KNX interface for


| |  KLIC-DI Size 45x45x15mm | |
|---------------------------------|--|------------------------------|
| | Sky Air | VRV |
| BASIC CONTROL | | |
| ON/OFF | ✓ | ✓ |
| Mode | Auto, heat, dry, fan, cool | Auto, heat, dry, fan, cool |
| Temperature | ✓ | ✓ |
| Fan speed levels | 2 or 3 | 2 or 3 |
| Swing | Stop or movement | Swing or fixed positions (5) |
| ADVANCED FUNCTIONALITIES | | |
| Error management | Communication errors, | |
| Scenes | ✓ | ✓ |
| Auto switch off | ✓ | ✓ |
| Temperature limitation | ✓ | ✓ |
| Initial configuration | ✓ | ✓ |
| Master and slave configuration | ✓ | ✓ |

Standard protocol interfaces

BACnet Interface

Integrated control system for seamless connection between VRV and BMS systems

- › PPDdata is available on BMS system
- › Interface for BMS system
- › Communication via BACnet protocol (connection via Ethernet)
- › 256 units connectable per BACnet gateway
- › Unlimited sitesize
- › Easy and fast installation

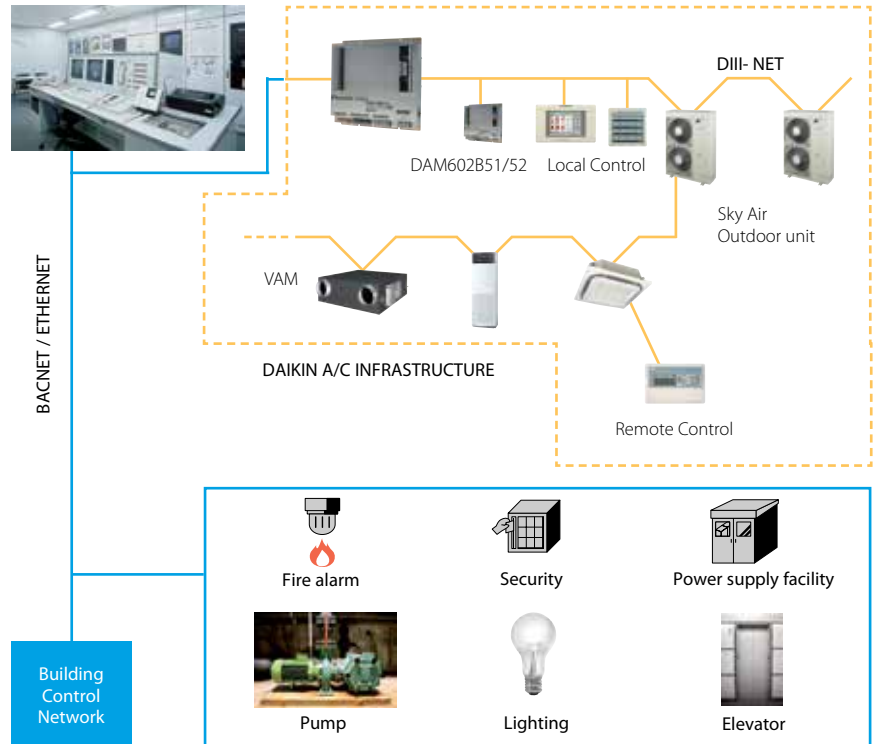


Standard protocol interfaces

LonWorks Interface

Open integration of VRV monitoring and control functions into LonWorks networks

- › Interface for Lon connection to LonWorks networks
- › Communication via Lon protocol (twisted pair wire)
- › 64 units connectable per DMS-IF
- › Unlimited sitesize
- › Quick and easy installation

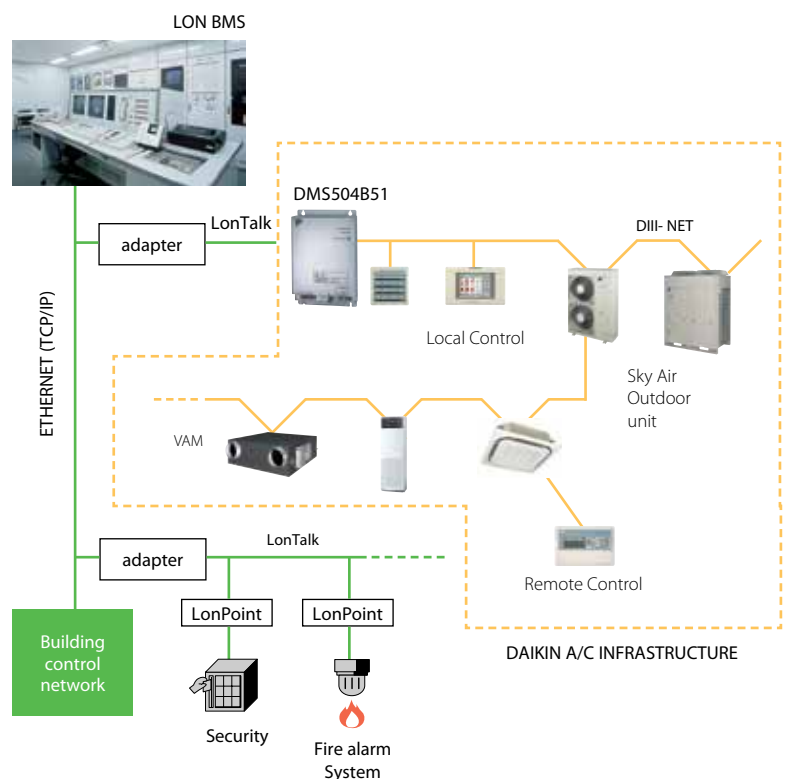

Flexible and easy installation

- › Accurate temperature measurement thanks to flexible placement of the sensor
- › No need for wiring
- › No need to drill holes
- › Ideal for refurbishment



Connection diagram Daikin indoor unit PCB (FBQ-C8 example)



Specifications

| WIRELESS ROOM TEMPERATURE SENSOR KIT (K.RSS) | | | |
|--|-----------|------------------------------------|----------------------------------|
| | | WIRELESS ROOM TEMPERATURE RECEIVER | WIRELESS ROOM TEMPERATURE SENSOR |
| Dimensions | mm | 50 x 50 | ø 75 |
| Weight | g | 40 | 60 |
| Power supply | | 16VDC, max. 20 mA | N/A |
| Battery life | | N/A | +/- 3 years |
| Battery type | | N/A | 3 Volt Lithium battery |
| Maximum range | m | 10 | |
| Operation range | °C | 0~50 | |
| Communication | Type | RF | |
| | Frequency | 868.3 | |

- › Room temperature is sent to the indoor unit every 90 seconds or if the temperature difference is 0.2°C or larger.

KRCS01-1B

KRCS01-4B

Wired room temperature sensor



- › Accurate temperature measurement, thanks to flexible placement of the sensor



Specifications

| | | |
|-------------------------|----|---------|
| Dimensions (HxW) | mm | 60 x 50 |
| Weight | g | 300 |
| Length of branch wiring | m | 12 |

Daikin's adapter PCB's provide simple solutions for unique requirements. They are a low cost option to satisfy simple control requirements and can be used on single or multiple units.

| | | |
|---|---|---|
|  | (E)KRP1B* adapter for wiring | <ul style="list-style-type: none"> › Facilitates integration of auxiliary heating apparatus, humidifiers, fans, damper › Powered by and installed at the indoor unit |
|  | KRP2A*/KRP4A* Wiring adapter for electrical appendices | <ul style="list-style-type: none"> › Remotely start and stop up to 16 indoor units (1 group) (KRP2A* via P1 P2) › Remotely start and stop up to 128 indoor units (64 groups) (KRP4A* via F1 F2) › Alarm indication/ fire shut down › Remote temperature setpoint adjustment |

Concept and benefits

- › Low cost option to satisfy simple control requirements
- › Deployed on single or multiple units





Ventilation, condensing units & AHU application

| ERQ | ERQ100-125AV1 | ERQ140AV1 | ERQ125AW1 | ERQ200-250AW1 |
|--------------------|---------------|-----------|------------|---------------|
| Central drain pan | | | KWC26B160 | KWC26B280 |
| Central drain plug | KKPJ5F180 | KKPJ5F180 | | - |
| Cool/heat selector | | | KRC19-26A6 | |
| Fixing box | | | KJB111A | |

Notes
 (1) Filter chamber has a suction-type flange. (Main unit does not). Some options may not be usable due to the equipment installations conditions. Please confirm prior to ordering. Some options may not be used in combination. Operating sound may increase somewhat depending on the options used.

| | | VAM150FA | VAM250FA | VAM350FB | VAM500FB | VAM650FB | VAM800FB | VAM1000FB | VAM1500FB | VAM2000FB |
|------------------------------|----------------------------|----------|----------|-----------|-----------|------------|---------------|---------------|---------------|---------------|
| Dust filters | EN779 Medium M6 | - | - | EKAFV50F6 | EKAFV50F6 | EKAFV80F6 | EKAFV80F6 | EKAFV100F6 | EKAFV100F6 x2 | EKAFV100F6 x2 |
| | EN779 Fine F7 | - | - | EKAFV50F7 | EKAFV50F7 | EKAFV80F7 | EKAFV80F7 | EKAFV100F7 | EKAFV100F7 x2 | EKAFV100F7 x2 |
| | EN779 Fine F8 | - | - | EKAFV50F8 | EKAFV50F8 | EKAFV80F8 | EKAFV80F8 | EKAFV100F8 | EKAFV100F8 x2 | EKAFV100F8 x2 |
| Silencer | Model name | - | - | - | KDDM24B50 | KDDM24B100 | KDDM24B100 | KDDM24B100 | KDDM24B100 x2 | KDDM24B100 x2 |
| | Nominal pipe Diameter (mm) | - | - | - | 200 | 200 | 250 | 250 | 250 | 250 |
| CO ₂ sensor | | - | - | BRYMA65 | BRYMA65 | BRYMA65 | BRYMA100 | BRYMA100 | BRYMA200 | BRYMA200 |
| VH electrical heater for VAM | | VH1B | VH2B | VH2B | VH3B | VH3B | VH4B / VH4/AB | VH4B / VH4/AB | VH5B | VH5B |

| INDIVIDUAL CONTROL SYSTEMS | VAM-FA/FB | EKEQFCB ² | EKEQDCB ² | EKEQMCB ² |
|----------------------------|-----------|----------------------|----------------------|----------------------|
| Wired remote control | BRC1D52 | BRC1D52 | BRC1D52 ¹ | BRC1D52 ¹ |
| VAM wired remote control | BRC301B61 | - | - | - |

| CENTRALISED CONTROL SYSTEMS | VAM-FA/FB | EKEQFCB ² | EKEQDCB ² | EKEQMCB ² |
|-----------------------------|-----------|----------------------|----------------------|----------------------|
| Centralised remote control | DCS302C51 | - | - | - |
| Unified ON/OFF control | DCS301B51 | - | - | - |
| Schedule timer | DST301B51 | - | - | - |

| OTHERS | VAM150-250FA | VAM350-2000FB | EKEQFCB ² | EKEQDCB ² | EKEQMCB ² |
|---|--------------|----------------|----------------------|----------------------|----------------------|
| Wiring adaptor for electrical appendices (note 6) | KRP2A51 (3) | KRP2A51(3) | KRP2A61 | - | KRP4A51 |
| Adaptor PCB for humidifier | KRP50-2 (3) | BRP4A50A (4/5) | - | - | - |
| Adaptor PCB for 3rd party heater | BRP4A50 | BRP4A50A (4/5) | - | - | - |
| Remote sensor | - | - | - | - | KRCS01-1 |

Notes

- (1) Cool/heat selector required for operation
- (2) Do not connect the system to DIII-net devices (Intelligent controller, Intelligent Manager, LonWorks interface, BACnet interface...).
- (3) Installation box KRP50-2A90 needed for VAM150-250FA.
- (4) Fixing plate EKMPVAM additionally needed for VAM1500-2000FB.
- (5) 3rd party heater and 3rd party humidifier cannot be combined
- (6) For external control and monitoring (ON/OFF control, operation signal, error indication)
- (7) Only use ERQ, EKEQ, EKEXV in combination with an air handling unit. Do not connect this system to other indoor units.

| | VH ELECTRICAL HEATER FOR VAM |
|--|--|
| Supply voltage | 220/250V ac 50/60 Hz. +/-10% |
| Output current (maximum) | 19A at 40°C (ambient) |
| Temperature sensor | 5k ohms at 25°C (table 502 1T) |
| Temperature control range | 0 to 40°C / (0-10V 0-100%) |
| Run on timer | Adjustable from 1 to 2 minutes (factory set at 1.5 minutes) |
| Control fuse | 20 X5 mm 250 m A |
| LED indicators | Power ON - Yellow Heater ON - Red (solid or flashing, indicating pulsed control) Airflow fault - Red |
| Mounting holes | 98mm X 181mm centres 5 mm ø holes |
| Maximum ambient adjacent to terminal box | 35°C (during operation) |
| Auto high temp. cutout | 100°C Pre-set |
| Man. reset high temp. cutout | 125°C Pre-set |
| Run relay | 1A 120V AC or 1A 24V DC |
| BMS setpoint input | 0-10VDC |

| VH ELECTRICAL HEATER FOR VAM | VH1B | VH2B | VH3B | VH4B | VH4/AB | VH5B |
|------------------------------|----------|----------|----------|-----------|-----------|-----------|
| Capacity kW | 1 | 1 | 1 | 1.5 | 2.5 | 2.5 |
| Duct diameter mm | 100 | 150 | 200 | 250 | 250 | 350 |
| Connectable VAM | VAM150FA | VAM250FA | VAM500FB | VAM800FB | VAM800FB | VAM1500FB |
| | - | VAM350FB | VAM650FB | VAM1000FB | VAM1000FB | VAM2000FB |

| OUTDOOR UNITS | 2MXS40H | 2MXS50H | 3MXS40K | 3MXS52E | 3MXS68G | 4MXS68F | 4MXS80E | 5MXS90E |
|---------------------------------|----------|---------|---------|---------|---------|---------|---------|---------|
| Air direction adjustment grille | KPW945A4 | | | | | | | |

| | RXYSQ |
|---|---|
| External control adaptor for outdoor unit | DTA104A53/61/62 |
| Allows to activate Low Noise Operation and three levels of Demand Limiting via external dry contacts. Connects to the F1/F2 communication line and requires power supply from an indoor unit. | For installation into an indoor unit: exact adaptor type depends on type of indoor unit |
| | See options & accessories of indoor units |
| KRC19-26A6 Mechanical cool/heat selector – allows to switch an entire Heat Pump system, or one BS-box of a Heat Recovery system between cooling, heating and fan only. Connects to the A-B-C terminals of the outdoor unit / BS-box. | ✓ |
| KJB111A Installation box for remote cool/heat selector KRC19-26 | ✓ |
| BPMKS967B2B/B3B Branch provider (for connection of 2/3 RA indoor units) | ✓ |
| KKPJ5F180 Central drain plug | ✓ |

Options & accessories - *SkyAir*

| INDOOR UNITS - CONTROL SYSTEMS | FCQHG71F | FCQHG100F | FCQHG125F | FCQHG140F | FCQG35F | FCQG50F | FCQG60F | FCQG71F | FCQG100F | FCQG125F | FCQG140F |
|--|---------------------------------------|-----------|-----------|-----------|---------------------------------------|---------|---------|---------|----------|----------|----------|
| Wired remote control | BRC1D52 / BRC1E52A (3) / BRC1E52B (4) | | | | BRC1D52 / BRC1E52A (3) / BRC1E52B (4) | | | | | | |
| Infrared remote control + decoration panel | - | | | | - | | | | | | |
| I-touch controller | DCS601C51 | | | | DCS601C51 | | | | | | |
| Infrared remote control (heat pump) | BRC7FA532F (5) | | | | BRC7FA532F (5) | | | | | | |
| Simplified remote control | - | | | | - | | | | | | |
| Remote control for hotel use | BRC3A61 | | | | BRC3A61 | | | | | | |
| Centralised remote control | DCS302C51 | | | | DCS302C51 | | | | | | |
| Unified ON/OFF control | DCS301B51 | | | | DCS301B51 | | | | | | |
| Schedule timer | DST301B51 | | | | DST301B51 | | | | | | |
| Adapter for wiring (interlock for fresh air intake fan) | - | | | | - | | | | | | |
| Adapter for external ON/OFF and monitoring/for electrical appendices | KRP1B57/KRP4A53 (1)(5) | | | | KRP1B57/KRP4A53 (1)(5) | | | | | | |
| Interface adapter for Sky Air | - | | | | - | | | | | | |
| Installation box for adapter PCB | KRP1H98 (5) | | | | KRP1H98 (5) | | | | | | |
| Remote sensor | KRCS01-4 | | | | KRCS01-4 | | | | | | |
| Remote ON/OFF, forced OFF | EKRORO2 | | | | - | | | | | | |
| Electrical box with earth terminal (3 blocks) | KJB311A | | | | KJB311A | | | | | | |
| Electrical box with earth terminal (2 blocks) | KJB212A | | | | KJB212A | | | | | | |
| Adapter for wiring (hour meter) | EKRP1C11 (1)(5) | | | | EKRP1C11 (1)(5) | | | | | | |
| Options PCB for external electrical heater, humidifier and/or hour meter | - | | | | - | | | | | | |
| Option PCB for group control (NIM03) | - | | | | - | | | | | | |

Notes

- (1) Installation box for adapter PCB is necessary
- (2) Interface adapter for Sky Air series (DTA112B51) is necessary
- (3) Including following languages: English, German, French, Italian, Spanish, Dutch, Greek, Russian, Turkish, Portuguese, Polish
- (4) Including following languages: English, German, Czech, Croatian, Hungarian, Romanian, Slovenian, Bulgarian, Slovak, Serbian, Albanian.
- (5) Option not available in combination with BYCQ140*G
- (6) Installation box for adapter PCB (KRP1B101) is necessary
- (7) Electrical heater, humidifier and hour meter are field supply. These parts should not be installed inside the equipment.
- (8) Sensing function is not available
- (9) Independently controllable flaps function is not available

| INDOOR UNITS | FCQHG71F | FCQHG100F | FCQHG125F | FCQHG140F | FCQG35F | FCQG50F | FCQG60F | FCQG71F | FCQG100F | FCQG125F | FCQG140F |
|---|--|-----------|-----------|-----------|--|---------|---------|---------|----------|----------|----------|
| Replacement long-life filter | KAFP551K160 | | | | KAFP551K160 | | | | | | |
| Drain pump kit | standard | | | | standard | | | | | | |
| Sealing member of air discharge outlet | KDBHQ55B140 (4) | | | | KDBHQ55B140 (4) | | | | | | |
| Decoration panel | BYCQ140D + BYCQ140DW(1) + BYCQ140DG (2)(3) | | | | BYCQ140D + BYCQ140DW(1) + BYCQ140DG (2)(3) | | | | | | |
| Decoration panel + infrared remote control | - | | | | - | | | | | | |
| Kit for mounting of decoration panel direct onto unit | - | | | | - | | | | | | |
| Fresh air intake kit (direct installation type) | KDDQ55B140-1 (4)+ KDDQ55B140-2 (6) | | | | KDDQ55B140-1 (4)+ KDDQ55B140-2 (6) | | | | | | |
| Air discharge adapter for round duct | - | | | | - | | | | | | |
| Panel spacer | - | | | | - | | | | | | |
| Sensor kit | BRYQ140A (5) | | | | BRYQ140A (5) | | | | | | |

Notes

- (1) The BYCQ140DW has white insulations. Be informed that dirt is more visible on white insulation and that it is consequently not advised to install the BYCQ140DW decoration panel in environments exposed to concentrations of dirt.
- (2) To be able to control the BYCQ140DG, the controller BRC1E* is needed
- (3) The BYCQ140DG is only compatible with Sky Air RZQ(G), RZQS(G); All VRV outdoors; Split RKS, RXS
- (4) Option not available in combination with BYCQ140DG
- (5) Sensor kit can only be operated with BRC1E52A/B
- (6) BYFQ60B2 = basic , BYFQ60CW = White , BYFQ60CS = Grey
- (7) BRYQ60AW = White, BRYQ60AS = Grey
- (8) Both parts of the fresh air intake kit are needed for each unit.

| ACQ71B | ACQ100B | ACQ125B | FFQ25C | FFQ35C | FFQ50C | FFQ60C | FDBQ25B | FBQ35C8 | FBQ50C8 | FBQ60C8 | FBQ71C8 | FBQ100C8 | FBQ125C8 | FBQ140C8 | ABQ71B | ABQ125A | ABQ140A |
|--------------|---------|---------|--|--------|--------|--------|---|-------------------------------------|---------|---------|---------|----------|----------|----------|--------------|---------|---------|
| ARCWB | | | BRC1D52 / BRC1E52A (3) - BRC1E52B (4)(9) | | | | BRC1D52 / BRC1E52A (3) BRC1E52B (4) | BRC1D52 / BRC1E52A (3) BRC1E52B (4) | | | | | | | - | | |
| ADP125A | | | - | | | | - | - | | | | | | | - | | |
| - | | | DCS601C51 | | | | - | DCS601C51 (2) | | | | | | | - | | |
| - | | | BRC7EB530/BRC7F530W/BRC7F530S (8-9) | | | | - | BRC4C65 | | | | | | | - | | |
| - | | | - | | | | - | - | | | | | | | - | | |
| - | | | - | | | | - | BRC3A61 | | | | | | | - | | |
| - | | | DCS302B51 | | | | - | DCS302C51 | | | | | | | - | | |
| - | | | DCS301B51 | | | | - | DCS301B51 | | | | | | | - | | |
| - | | | DST301B51 | | | | - | DST301B51 | | | | | | | - | | |
| - | | | - | | | | - | KRP1B54 | | | | | | | - | | |
| - | | | KRP1B57/KRP4A53(6) | | | | - | KRP4A51/KRP2A51 | | | | | | | - | | |
| - | | | - | | | | - | DTA112B51 | | | | | | | - | | |
| - | | | KRP1B101/ KRP1BA101 | | | | - | - | | | | | | | - | | |
| - | | | KRC501-4 | | | | - | KRC501-1 | | | | | | | - | | |
| - | | | - | | | | - | EKRORO3 | | | | | | | - | | |
| - | | | - | | | | - | - | | | | | | | - | | |
| - | | | - | | | | - | - | | | | | | | - | | |
| - | | | EKRP1B2 | | | | EKRP1B2 | - | | | | | | | - | | |
| - | | | - | | | | - | EKRP1B2A (7) | | | | | | | - | | |
| R04084124324 | | | - | | | | - | - | | | | | | | R04084124324 | | |

| ACQ71B | ACQ100B | ACQ125B | FFQ25C | FFQ35C | FFQ50C | FFQ60C | FDBQ25B | FBQ35C8 | FBQ50C8 | FBQ60C8 | FBQ71C8 | FBQ100C8 | FBQ125C8 | FBQ140C8 | ABQ71B | ABQ125A | ABQ140A |
|----------|---------|---------|--------------------------------|--------|--------|--------|---------|------------|---------|------------|---------|-------------|----------|----------|--------|---------|---------|
| - | | | KAFQ441BA60 | | | | - | - | | | | | | | - | | |
| standard | | | standard | | | | - | standard | | | | | | | - | | |
| - | | | BDBHQ44C60 | | | | - | - | | | | | | | - | | |
| - | | | BYFQ60B3/BYFQ60CW/BYFQ60CS (6) | | | | - | BYBS45D | | BYBS71D | | BYBS125D | | | | - | |
| ADP125A | | | - | | | | - | - | | | | | | | - | | |
| - | | | - | | | | - | EKBYBSD | | | | | | | - | | |
| - | | | KDDQ44XA60 | | | | - | - | | | | | | | - | | |
| - | | | - | | | | - | KDAJ25K56A | | KDAJ25K71A | | KDAJ25K140A | | | | - | |
| - | | | KDBQ44B60 | | | | - | - | | | | | | | - | | |
| - | | | BRYQ60AW/BRYQ60AS (7) | | | | - | - | | | | | | | - | | |

Options & accessories - *SkyAir*

| INDOOR UNITS - CONTROL SYSTEMS | FDQ125C | FDQ200B | FDQ250B | FAQ71C | FAQ100C | FHQ35C | FHQ50C | FHQ60C | FHQ71C |
|--|---------------------------------------|-----------|---------|---------------------------------------|---------|---------------------------------------|--------|----------------------|-----------|
| Wired remote control | BRC1D52 / BRC1E52A (3) / BRC1E52B (4) | | | BRC1D52 / BRC1E52A (3) / BRC1E52B (4) | | BRC1D52 / BRC1E52A (3) / BRC1E52B (4) | | | |
| I-touch controller | DCS601C51 | - | | DCS601C51 | | | | | - |
| Infrared remote control (heat pump) | BRC4C65 | - | | BRC7EB518 | | | | | BRC7G53 |
| Simplified remote control | | - | | BRC2C51 | | | | | - |
| Remote control for hotel use | | - | | BRC3A61 | | | | | - |
| Centralised remote control | | DCS302C51 | | DCS302C51 | | | | | DCS302C51 |
| Unified ON/OFF control | | DCS301B51 | | DCS301B51 | | | | | DCS301B51 |
| Schedule timer | | DST301B51 | | DST301B51 | | | | | DST301B51 |
| Adapter for wiring (interlock for fresh air intake fan) | KRP1C64 | KRP1B54 | | - | | | | | - |
| Adapter for external ON/OFF and monitoring/for electrical appendices | | KRP4A51 | | KRP4A51 (1) | | | | KRP1B54 / KRP4A52(1) | |
| Interface adapter for Sky Air (2) | - | DTA112B51 | | - | | | | | - |
| Installation box for adapter PCB | | - | | KRP4A93 | | | | | KRP1D93A |
| Remote sensor | KRCS01-4B | - | | KRCS01-1 | | | | | KRCS01-4B |
| Remote ON/OFF, forced OFF | EKRORO3 | EKRORO | | - | | | | | EKRORO4 |
| Electrical box with earth terminal (3 blocks) | | - | | KJB311A | | | | | KJB311A |
| Electrical box with earth terminal (2 blocks) | | - | | KJB212A | | | | | KJB212A |
| Options PCB for external electrical heater, humidifier and/or hour meter | EKRP1B2 | EKRP1B2 | | - | | | | | - |
| Mounting plate for adapter PCB | KRP4A96 | - | | - | | | | | - |
| Option PCB for group control (NIM03) | | - | | - | | | | | - |

Notes

- (1) Installation box for adapter PCB is necessary
- (2) Interface adapter for Sky Air series (DTA112B51) is necessary
- (3) Including following languages: English, German, French, Italian, Spanish, Dutch, Greek, Russian, Turkish, Portuguese, Polish
- (4) Including following languages: English, German, Czech, Croatian, Hungarian, Romanian, Slovenian, Bulgarian, Slovak, Serbian, Albanian.
- (5) Electrical heater, humidifier and hour meter are field supply. These parts should not be installed inside the equipment.
- (6) With the infrared remote control, the individual flap control and automatic air volume control cannot be controlled.

| INDOOR UNITS | FDQ125C | FDQ200B | FDQ250B | FAQ71C | FAQ100C | FHQ35C | FHQ50C | FHQ60C | FHQ71C |
|---|----------|-------------|---------|-------------|---------|------------|----------|------------|--------|
| Replacement long-life filter | | - | | - | | KAFF501A56 | | KAFF501A80 | |
| Drain pump kit | standard | - | | K-KDU572EVE | | KDU50P60 | | | |
| L-type piping kit (upward direction) | | - | | - | | KHFP5M35 | KHFP5N63 | | |
| Sealing member of air discharge outlet | | - | | - | | | | - | |
| Decoration panel for air discharge | | - | | - | | | | - | |
| Decoration panel | | BYBS125D(1) | | - | | | | - | |
| Decoration panel option | | EKBYBSD | | - | | | | - | |
| Noise filter | | - | | KEK26-1A | | | | - | |
| Air discharge adapter for round duct | | KDAJ25K140A | | - | | | | - | |
| Fresh air intake kit (direct installation type) | | - | | - | | | | KDDQ50A140 | |

Notes

- (1) Decoration panel option EKBYBSD is required for direct mounting of the decoration panel of the unit.

| OUTDOOR UNITS | RZQG71L8V1/Y1 | RZQG100L8V1/Y1 | RZQG125L8V1/Y1 | RZQG140LV1/Y1 | RZQSG71L3V1 |
|---------------------------------|-----------------|------------------------------------|------------------------------------|---------------|-------------|
| Air direction adjustment grille | | | - | | |
| Central drain plug | | | - | | |
| Refrigerant branch piping | For twin | KHRQ22M20TA (KHRQ58T) ² | | - | |
| | For triple | - | KHRQ127H (KHRQ58T) ² | - | |
| | For double twin | - | KHRQ22M20TA (KHRQ58T) ² | | - |
| Demand adapter kit | | | KRP58M51 | | |
| Bottom plate heater | | EKBPH140L7 ¹ | | | |

Notes

- (1) Bottom plate heater is only available for RZQG* models
- (2) For combination of RZQ(S)G71-140 in combination with FCQG35-71F or FCQHG71F use the refrigerant branch piping mentioned between brackets.
- (3) For RZQG71L8V1 and EKBPH140L7 it is required to use the demand adapter kit KRP58M51 in order to connect the bottom plate heater.

| FHQ100C | FHQ125C | FHQ140C | AHQ71C | AHQ100C | AHQ125C | AHQ140C | FUQ71C | FUQ100C | FUQ125C | FVQ71C | FVQ100C | FVQ125C | FVQ140C |
|---------|---------|---------|--------|--------------|---------|---------|---------------------------------------|---------|---------|---------------------------------------|---------|---------|---------|
| | | | | ARCWB | | | BRC1D52 / BRC1E52A (3) / BRC1E52B (4) | | | BRC1D52 / BRC1E52A (3) / BRC1E52B (4) | | | |
| | | | | - | | | - | | | DCS301C51 | | | |
| | | | | - | | | BRC7C58 (6) | | | - | | | |
| | | | | - | | | - | | | BRC2C51 | | | |
| | | | | - | | | - | | | BRC3A61 | | | |
| | | | | - | | | DCS302C51 | | | DCS302C51 | | | |
| | | | | - | | | DCS301B51 | | | DCS301B51 | | | |
| | | | | - | | | DST301B51 | | | DST301B51 | | | |
| | | | | - | | | - | | | - | | | |
| | | | | - | | | KRP4A53 (1) | | | KRP1B57 / KRP4A52 | | | |
| | | | | - | | | - | | | - | | | |
| | | | | - | | | KRP1B97 | | | KRP4AA95 | | | |
| | | | | - | | | KRCS01-4 | | | - | | | |
| | | | | - | | | EKROROS | | | - | | | |
| | | | | - | | | KJB311A | | | - | | | |
| | | | | - | | | KJB212A | | | - | | | |
| | | | | - | | | - | | | - | | | |
| | | | | - | | | - | | | - | | | |
| | | | | R04084124324 | | | - | | | - | | | |

| FHQ100C | FHQ125C | AHQ71C | AHQ100C | AHQ125C | AHQ140C | FUQ71C | FUQ100C | FUQ125C | FVQ71C | FVQ100C | FVQ125C | FVQ140C |
|-------------|---------|--------|---------|---------|---------|-------------|---------|---------|------------|---------|---------|---------|
| KAFP501A160 | | | - | | | KAFP551K160 | | | KAFJ95L160 | | | |
| KDU50P140 | | | - | | | standard | | | - | | | |
| KHFP5N160 | | | - | | | - | | | - | | | |
| | | | - | | | KDBHP49B140 | | | - | | | |
| | | | - | | | KDBTP49B140 | | | - | | | |
| | | | - | | | - | | | - | | | |
| | | | - | | | - | | | - | | | |
| | | | - | | | - | | | - | | | |
| | | | - | | | - | | | - | | | |
| | | | - | | | - | | | - | | | |

| RZQSG100L8V1/Y1 | RZQSG125L8V1/Y1 | RZQSG140LV1/Y1 | AZQS71BV1/BY1 | AZQS125BV1/BY1 | AZQS140BV1/BY1 | RZQ200C | RZQ250C |
|-----------------|------------------------------------|----------------|---------------|----------------|----------------|------------------|---------|
| | - | | | - | | | - |
| | - | | | - | | KWC26B280 | |
| | KHRQ22M20TA (KHRQ58T) ² | | | - | | KHRQ22M20TA | |
| | KHRQ127H (KHRQ58T) ² | | | - | | KHRQ250H7 | |
| | KHRQ22M20TA (KHRQ58T) ² | | | - | | KHRQ22M20TA (x3) | |
| | KRP58M51 | | KRP58M51 | | | KRP58M51 | |

| | UATYQ-C |
|----------------------|-----------|
| Rooftop controller | √ |
| PCB | √ |
| EXV | √ |
| Gold Fin (NA549) | √ |
| Scroll compressor | √ |
| Saranet Air Filter | √ |
| Side flow | √ |
| Convertible | √ |
| Filter drier | √ |
| High pressure switch | √ |
| Low pressure switch | √ |
| Economiser | ECONO-AY1 |

No options available for UATYP-AY1(B)
No options available for ECONO-AY1


Europe's New Energy Label

Labelling encourage intelligent choices

To enable consumers to compare and make purchasing decisions based on uniform labelling criteria, Europe has introduced energy labels. The previous European energy label for air conditioners, introduced in 1992, has had its effect. In 2013 Europe has introduced a Seasonal energy label. This label allows end-users to make even better informed choices, since seasonal efficiency reflects air conditioner efficiency over an entire season.

The energy label includes multiple classifications from A+++ to D reflected in colour shadings ranging from dark green (most energy efficient) to red (least efficient). Information on the label includes not only the seasonal efficiency ratings for heating (SCOP) and cooling (SEER), but also annual energy consumption and sound levels.

The label more in detail

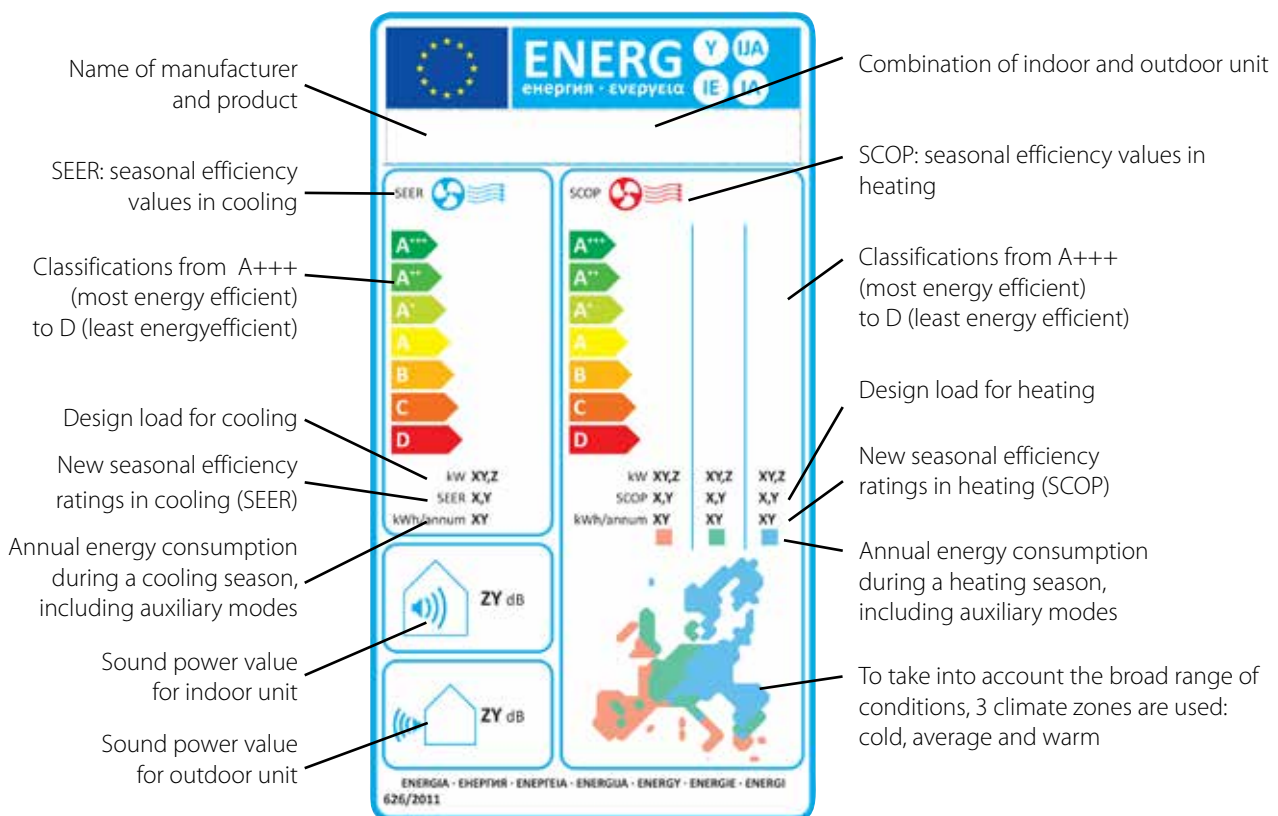

Blue = colder climate (optional)
 Green = average climate (compulsory)
 Orange = warmer climate (optional)



Power supply

V1 = 1~, 220-240V, 50Hz

VE = 1~, 220-240V/220V, 50Hz/60Hz*

W1 = 3N~, 400V, 50Hz

* For VE power supply only 1~, 220-240V, 50Hz data is displayed in this catalogue.

Measuring conditions

Air conditioning

| | |
|---|---------------|
| 1) nominal cooling capacities are based on: | |
| Indoor temperature | 27°CDB/19°CWB |
| Outdoor temperature | 35°CDB |
| Refrigerant piping length | 7.5m |
| Level difference | 0m |
| 2) nominal heating capacities are based on: | |
| Indoor temperature | 20°CDB |
| Outdoor temperature | 7°CDB/6°CWB |
| Refrigerant piping length | 7.5m |
| Level difference | 0m |

The sound pressure level is measured via a microphone at a certain distance from the unit. It is a relative value, depending on the distance and acoustic environment (for measuring conditions; please refer to the technical databooks). The sound power level is an absolute value indicating the "power" which a sound source generates. For more detailed information please consult our technical databooks.

Design & Genius in One



*“Leading edge design
in tune with time”*

The present leaflet is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V.. Daikin Europe N.V. has compiled the content of this leaflet to the best of its knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this leaflet. All content is copyrighted by Daikin Europe N.V.



Daikin Europe N.V. participates in the Eurovent Certification programme for Liquid Chilling Packages (LCP) and Fan coil units (FCU). Check ongoing validity of certificate online: www.eurovent-certification.com or using: www.certiflash.com

FSC

ECPEN14-114

Daikin products are distributed by: