


Wall mounted unit

FTXJ-AS / FTXJ-AW / FTXJ-AB + RXJ-A



Coanda effect - cooling

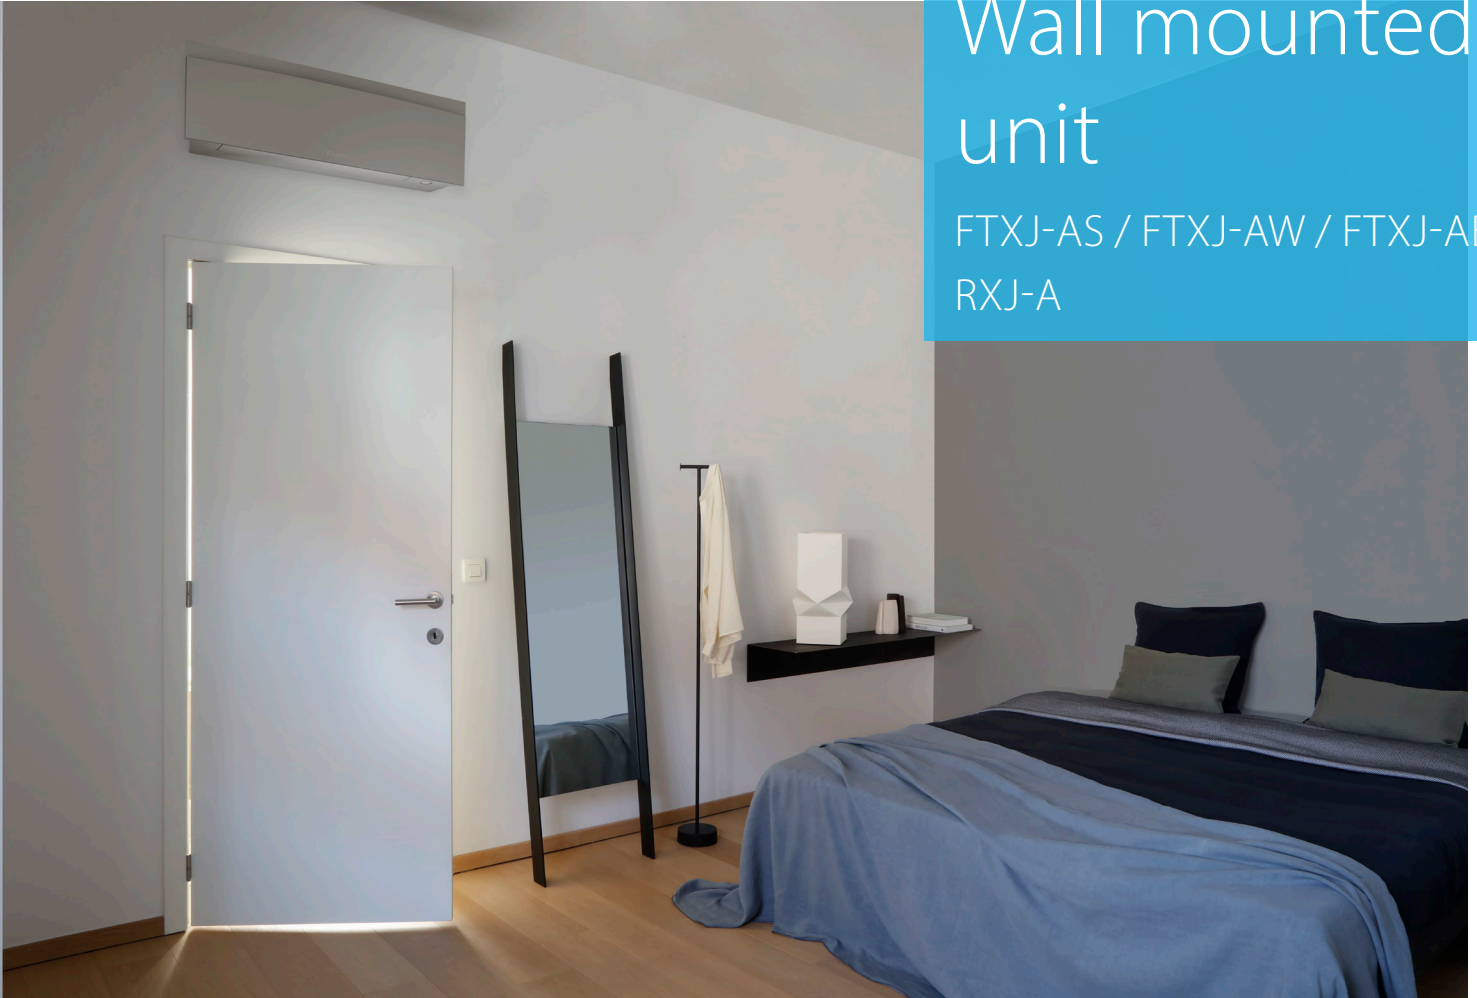

Coanda effect - heating



Intelligent thermal sensor



Onecta via app



Multi model application

Design that speaks for itself

- › Iconic design in matt crystal white, silver finish and matt black
- › Perfect temperature distribution thanks to Coanda effect
- › Intelligent thermal sensor: air flow is adjusted when detecting temperature differences
- › Voice control
- › Heat boost: fast heating during start-up (pair only)
- › Daikin Flash Streamer technology: powerful air purification
- › Onecta app
- › Oh so quiet

FTXJ-AS / FTXJ-AW / FTXJ-AB + RXJ-A



Efficiency data			FTXJ + RXJ	20AS + 20A	25AS + 25A	35AS + 35A	42AS + 42A	50AS + 50A
Cooling capacity	Min./Nom./Max.	kW	1.30 / 2.00 / 2.60	1.30 / 2.50 / 3.20	1.40 / 3.40 / 4.00	1.70 / 4.20 / 5.00	1.70 / 5.00 / 5.30	
Heating capacity	Min./Nom./Max.	kW	1.30 / 2.50 / 3.50	1.30 / 2.80 / 4.70	1.40 / 4.00 / 5.20	1.70 / 5.40 / 6.00	1.70 / 5.80 / 6.50	
Power input	Cooling	Nom. kW	0.43	0.56	0.78	1.05	1.36	
	Heating	Nom. kW	0.50	0.56	0.99	1.31	1.45	
Space cooling	Energy efficiency class			A+++			A++	
	Capacity	Pdesign kW	2.00	2.50	3.40	4.20	5.00	
	SEER		8.75	8.74	8.73	7.50	7.33	
	Annual energy consumption	kWh/a	80	100	136	196	239	
Space heating (Average climate)	Energy efficiency class			A+++			A++	
	Capacity	Pdesign kW	2.40	2.45	2.50	3.80	4.00	
	SCOP/A			5.15			4.60	
	Annual energy consumption	kWh/a	652	666	680	1,156	1,218	

Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range | See separate drawing for electrical data

Efficiency data			FTXJ + RXJ	20AW + 20A	25AW + 25A	35AW + 35A	42AW + 42A	50AW + 50A
Cooling capacity	Min./Nom./Max.	kW	1.30 / 2.00 / 2.60	1.30 / 2.50 / 3.20	1.40 / 3.40 / 4.00	1.70 / 4.20 / 5.00	1.70 / 5.00 / 5.30	
Heating capacity	Min./Nom./Max.	kW	1.30 / 2.50 / 3.50	1.30 / 2.80 / 4.70	1.40 / 4.00 / 5.20	1.70 / 5.40 / 6.00	1.70 / 5.80 / 6.50	
Power input	Cooling	Nom. kW	0.43	0.56	0.78	1.05	1.36	
	Heating	Nom. kW	0.50	0.56	0.99	1.31	1.45	
Space cooling	Energy efficiency class			A+++			A++	
	Capacity	Pdesign kW	2.00	2.50	3.40	4.20	5.00	
	SEER		8.75	8.74	8.73	7.50	7.33	
	Annual energy consumption	kWh/a	80	100	136	196	239	
Space heating (Average climate)	Energy efficiency class			A+++			A++	
	Capacity	Pdesign kW	2.40	2.45	2.50	3.80	4.00	
	SCOP/A			5.15			4.60	
	Annual energy consumption	kWh/a	652	666	680	1,156	1,218	

Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range | See separate drawing for electrical data

Efficiency data			FTXJ + RXJ	20AB + 20A	25AB + 25A	35AB + 35A	42AB + 42A	50AB + 50A
Cooling capacity	Min./Nom./Max.	kW	1.30 / 2.00 / 2.60	1.30 / 2.50 / 3.20	1.40 / 3.40 / 4.00	1.70 / 4.20 / 5.00	1.70 / 5.00 / 5.30	
Heating capacity	Min./Nom./Max.	kW	1.30 / 2.50 / 3.50	1.30 / 2.80 / 4.70	1.40 / 4.00 / 5.20	1.70 / 5.40 / 6.00	1.70 / 5.80 / 6.50	
Power input	Cooling	Nom. kW	0.43	0.56	0.78	1.05	1.36	
	Heating	Nom. kW	0.50	0.56	0.99	1.31	1.45	
Space cooling	Energy efficiency class			A+++			A++	
	Capacity	Pdesign kW	2.00	2.50	3.40	4.20	5.00	
	SEER		8.75	8.74	8.73	7.50	7.33	
	Annual energy consumption	kWh/a	80	100	136	196	239	
Space heating (Average climate)	Energy efficiency class			A+++			A++	
	Capacity	Pdesign kW	2.40	2.45	2.50	3.80	4.00	
	SCOP/A			5.15			4.60	
	Annual energy consumption	kWh/a	652	666	680	1,156	1,218	

Nominal heating capacities are based on: indoor temperature: 20°CDB, outdoor temperature: 7°CDB, 6°CWB, equivalent refrigerant piping: 5m, level difference: 0m. | Nominal cooling capacities are based on: indoor temperature: 27°CDB, 19°CWB, outdoor temperature: 35°CDB, equivalent refrigerant piping: 5m, level difference: 0m. | See separate drawing for operation range | See separate drawing for electrical data

Indoor unit			FTXJ	20AS	25AS	35AS	42AS	50AS	
Dimensions	Unit	HeightxWidthxDepth	mm	305 x 900 x 212					
Weight	Unit		kg	12					
Air filter	Type			Removable / washable					
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/ High	m³/min	4.6 / 6.0 / 8.4 / 11.0	4.6 / 6.0 / 8.6 / 11.4	4.6 / 6.0 / 8.6 / 11.8	4.6 / 7.2 / 9.5 / 13.0	5.2 / 7.6 / 10.4 / 13.5
		Heating	Silent operation/ Low/Medium/ High	m³/min	4.6 / 6.4 / 8.7 / 11.1	4.6 / 6.4 / 9.0 / 11.3	4.6 / 6.4 / 9.0 / 11.7	5.2 / 7.7 / 10.5 / 14.4	5.7 / 8.2 / 11.1 / 15.0
Sound power level	Cooling		dBA	57			60		
Sound pressure level	Cooling	Silent operation/Low/High	dBA	19 / 25 / 39	19 / 25 / 40	19 / 25 / 41	21 / 29 / 45	24 / 31 / 46	
	Heating	Silent operation/Low/High	dBA	19 / 25 / 39	19 / 25 / 40	19 / 25 / 41	21 / 29 / 45	24 / 33 / 46	
Control systems	Infrared remote control			ARC488A1K					
	Wired remote control			BRC073A1					
Piping connections	Drain			18					

Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m

Indoor unit				FTXJ	20AW	25AW	35AW	42AW	50AW
Dimensions	Unit	HeightxWidthxDepth		mm	305 x900 x212				
Weight	Unit			kg	12				
Air filter	Type	Removable / washable							
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/ High	m ³ /min	4.6 /6.0 /8.4 /11.0	4.6 /6.0 /8.6 /11.4	4.6 /6.0 /8.6 /11.8	4.6 /7.2 /9.5 /13.0	5.2 /7.6 /10.4 /13.5
		Heating	Silent operation/ Low/Medium/ High	m ³ /min	4.6 /6.4 /8.7 /11.1	4.6 /6.4 /9.0 /11.3	4.6 /6.4 /9.0 /11.7	5.2 /7.7 /10.5 /14.4	5.7 /8.2 /11.1 /15.0
Sound power level	Cooling			dBA	57			60	
Sound pressure level	Cooling	Silent operation/Low/High		dBA	19 /25 /39	19 /25 /40	19 /25 /41	21 /29 /45	24 /31 /46
	Heating	Silent operation/Low/High		dBA	19 /25 /39	19 /25 /40	19 /25 /41	21 /29 /45	24 /33 /46
Control systems	Infrared remote control			ARC488A1K					
	Wired remote control			BRC073A1					
Piping connections	Drain			18					

Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m

Indoor unit				FTXJ	20AB	25AB	35AB	42AB	50AB
Dimensions	Unit	HeightxWidthxDepth		mm	305 x900 x212				
Weight	Unit			kg	12				
Air filter	Type	Removable / washable							
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/ High	m ³ /min	4.6 /6.0 /8.4 /11.0	4.6 /6.0 /8.6 /11.4	4.6 /6.0 /8.6 /11.8	4.6 /7.2 /9.5 /13.0	5.2 /7.6 /10.4 /13.5
		Heating	Silent operation/ Low/Medium/ High	m ³ /min	4.6 /6.4 /8.7 /11.1	4.6 /6.4 /9.0 /11.3	4.6 /6.4 /9.0 /11.7	5.2 /7.7 /10.5 /14.4	5.7 /8.2 /11.1 /15.0
Sound power level	Cooling			dBA	57			60	
Sound pressure level	Cooling	Silent operation/Low/High		dBA	19 /25 /39	19 /25 /40	19 /25 /41	21 /29 /45	24 /31 /46
	Heating	Silent operation/Low/High		dBA	19 /25 /39	19 /25 /40	19 /25 /41	21 /29 /45	24 /33 /46
Control systems	Infrared remote control			ARC488A1K					
	Wired remote control			BRC073A1					
Piping connections	Drain			18					

Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m

Outdoor unit				RXJ	20A	25A	35A	42A	50A
Dimensions	Unit	HeightxWidthxDepth		mm	552 x840 x350			734 x954 x408	
Weight	Unit			kg	33			49	
Sound power level	Cooling			dBA	59		61	62	
Sound pressure level	Cooling	Low/Nom./High		dBA	-46 /-		-49 /-	-48 /-	
	Heating	Low/Nom./High		dBA	-47 /-		-49 /-	-48 /-	-49 /-
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10 ~50				
	Heating	Ambient	Min.~Max.	°CWB	-20 ~18				
Refrigerant	Type			R-32					
	GWP			675					
	Charge			kg/TCO2Eq	0.76 /0.52			1.10 /0.75	
Piping connections	Liquid	OD		mm	6.35				
	Gas	OD		mm	9.5			12.7	
	Drain	OD		mm	16 (inner diameter of connecting hose)				
	Piping length	OU - IU	Max.	m	20			30	
	Additional refrigerant charge	System	Chargeless	m	10				
	Level difference	IU - OU	Max.	m	15			20	
	Heat insulation			Both liquid and gas pipes					
Capacity control	Method			Variable (inverter)					
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240				
Current - 50Hz	Maximum fuse amps (MFA)			A	10	13			

See separate drawing for operation range | See separate drawing for electrical data | Contains fluorinated greenhouse gases

Daikin Europe Naamloze Vennootschap - Zandvoordestraat 300 - 8400 Oostende - Belgium - <https://www.daikin.eu/> - BE 0412 120 336 - RPR Oostende (Responsible Editor)



Daikin Europe N.V. participates in the ECP programmes for Fan Coil Units and Variable Refrigerant Flow systems. Daikin Applied Europe S.p.A. participates in the ECP programmes for Liquid Chilling Packages and Hydronic Heat Pumps. Check ongoing validity of certificate: www.eurovent-certification.com

ECPEN22-041

04/2022



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. / Daikin Central Europe HandelsGmbH, Daikin Europe N.V. / Daikin Central Europe HandelsGmbH have compiled the content of this publication to the best of their knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.