

Wall mounted unit

FTXQ-A + RXQ-A



BLUEEVOLUTION sensira



Daikin Residential Controller




Energy saving during standby mode

Wall mounted unit, offering good value for money

- › Flat, stylish front panel blends easily with any interior décor and is easier to clean
- › Daikin residential controller via app (optional)

- › Seasonal efficiency values up to A++ in cooling
- › Bluevolution range: lower environmental impact

FTXQ-A + RXQ-A

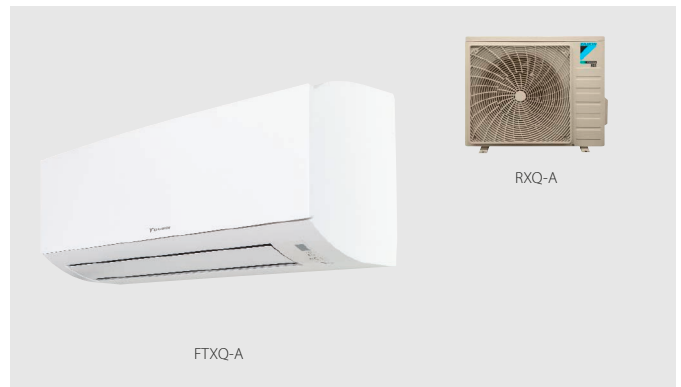

Indoor unit		FTXQ		25A		35A	
Dimensions	Unit	HeightxWidthxDepth	mm	291x770x232			
Weight	Unit		kg	9.00			
Air filter	Type			Removable/washable			
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m ³ /min	5.0/6.5/8.1/10.2		6.0/7.0/8.5/10.5
		Heating	Silent operation/ Low/Medium/High	m ³ /min	6.8/8.1/9.6/11.1		6.9/8.3/10.0/12.0
Sound power level	Cooling			dB(A)	55		
Sound pressure level	Cooling	Silent operation/Low/High		dB(A)	23.0/26.0/40.0		24.0/28.0/41.0
	Heating	Silent operation/Low/High		dB(A)	25.0/29.0/40.0		25.0/30.0/42.0
Control systems	Infrared remote control				ARC470A1		
	Wired remote control				-		


Cooling: indoor temp. 27°CDB, 19.0°CWB; outdoor temp. 35°CDB, 24°CWB; equivalent piping length: 5m | Heating: indoor temp. 20°CDB; outdoor temp. 7°CDB, 6°CWB; equivalent refrigerant piping: 5m

Outdoor unit		RXQ		25A		35A	
Dimensions	Unit	HeightxWidthxDepth	mm	550x740x337			
Weight	Unit		kg	23.0		25.5	
Sound power level	Cooling	Nom.		dB(A)	61.0		
Sound pressure level	Cooling	High		dB(A)	47.0		
Operation range	Cooling	Ambient	Min.~Max.	°CDB	10 ~46		
	Heating	Ambient	Min.~Max.	°CWB	-15 ~18		
Refrigerant	Type				R-32		
	GWP				675.0		
	Charge		kg/TCO ₂ Eq		0.500 /0.340		0.710 /0.480
Piping connections	Liquid	OD		mm	6.35		
	Gas	OD		mm	9.50		
	Piping length	OU - IU	Max.	m	20		
	Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 10m)		
	Level difference	IU - OU	Max.	m	12.0		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50 /220-240		
Current - 50Hz	Maximum fuse amps (MFA)			A	16		

Contains fluorinated greenhouse gases | See separate drawing for operation range | See separate drawings for electrical data

Efficiency data		FTXQ + RXQ		25A + 25A		35A + 35A	
Cooling capacity	Min./Nom./Max.			kW	1.30/2.50/3.00		1.30/3.50/3.80
Heating capacity	Min./Nom./Max.			kW	1.30/3.00/3.90		1.30/3.90/4.80
Power input	Cooling	Nom.		kW	0.77		1.08
	Heating	Nom.		kW	0.81		1.05
Space cooling	Energy efficiency class				A++		
	Capacity	Pdesign		kW	2.50		3.50
	SEER				6.22		6.21
	Annual energy consumption			kWh/a	141		197
Space heating (Average climate)	Energy efficiency class				A+		
	Capacity	Pdesign		kW	2.30		2.40
	SCOP/A				4.22		4.12
	Annual energy consumption			kWh/a	764		815
Nominal efficiency	EER				3.24		
	COP				3.71		
	Annual energy consumption			kWh	386		540
	Energy labeling Directive Cooling/Heating				A/A		

Daikin Europe N.V. Naamloze Venootschap · Zandvoordestraat 300 · 8400 Oostende · Belgium · www.daikin.eu · BE 0412 120 336 · BE 0412 120 336 (Responsible Editor)



Daikin Europe N.V. participates in the Eurovent Certified Performance programme for Fan Coil Units and Variable Refrigerant Flow systems. Check ongoing validity of certificate: www.eurovent-certification.com

ECPEN21-066

09/2021



The present publication is drawn up by way of information only and does not constitute an offer binding upon Daikin Europe N.V. / Daikin Central Europe HandelsGmbH. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH have compiled the content of this publication to the best of their knowledge. No express or implied warranty is given for the completeness, accuracy, reliability or fitness for particular purpose of its content and the products and services presented therein. Specifications are subject to change without prior notice. Daikin Europe N.V. / Daikin Central Europe HandelsGmbH explicitly rejects any liability for any direct or indirect damage, in the broadest sense, arising from or related to the use and/or interpretation of this publication. All content is copyrighted by Daikin Europe N.V.